



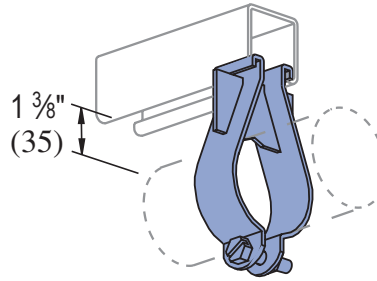

### P1563 THRU P1573

### PARALLEL CLAMPS FOR RIGID CONDUIT AND PIPE

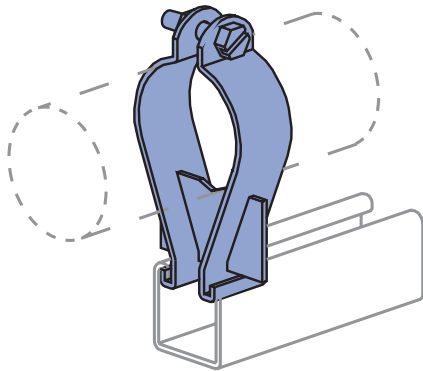

Slotted hex head screw and nut included.

Finish: Electro-galvanized.

Part No.	Pipe Size In (mm)	O.D. Size In (mm)	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)
P1563	3/8	0.675	14	27
	10	17.1	1.9	12.2
P1564	1/2	0.840	14	29
	13	21.3	1.9	13.2
P1565	3/4	1.050	14	30
	19	26.7	1.9	13.6
P1566	1	1.315	14	31
	25	33.4	1.9	14.1
P1567	1 1/4	1.660	14	38
	32	42.2	1.9	17.2
P1568	1 1/2	1.900	12	40
	38	48.3	2.7	18.1
P1569	2	2.375	12	47
	51	60.3	2.7	21.3
P1570	2 1/2	2.875	12	66
	64	73.0	2.7	29.9
P1571	3	3.500	12	78
	76	88.9	2.7	35.4
P1572	3 1/2	4.000	12	87
	89	101.6	2.7	39.5
P1573	4	4.500	12	90
	102	114.3	2.7	40.8

### MATERIAL

Unistrut pipe clamps, unless noted, are punch-press made from hot-rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A1008, A575, A576, A635, or A36. The fitting steel also meets the physical requirements of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

Many items are also available in stainless steel.

Consult factory for ordering information.

### FINISHES

Pipe supports are available in:

- Electro-galvanized (EG), conforming to ASTM B633 Type III SC1
- Hot-dipped galvanized (HG), conforming to ASTM A123 or A153 (hardware)
- Perma-Green III (GR), and plain (PL).

Project: \_\_\_\_\_

Architect / Engineer: \_\_\_\_\_

Date: \_\_\_\_\_ Phone: \_\_\_\_\_

Contractor: \_\_\_\_\_

Address: \_\_\_\_\_

Notes 1: \_\_\_\_\_

Notes 2: \_\_\_\_\_

Approval Stamp: \_\_\_\_\_