




P2609 THRU P2617, P2426 THRU P2431

UNI-CLIP® SUPPORT

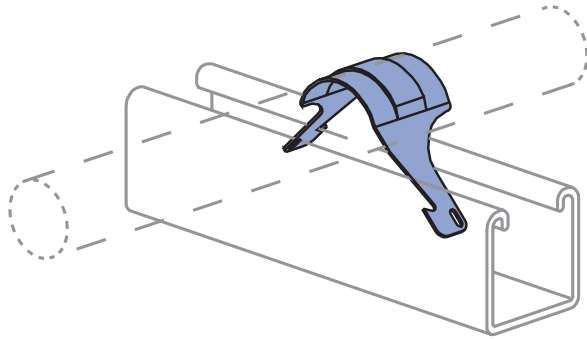

Material: Stainless steel type 301.

The Uni-Clip supports meet or exceed load requirements for American Standard Code for Pressure Piping (1967), and National Electric Code (1971).

Patent No. 2863625.

### UNI-CLIP® SUPPORTS FOR THINWALL CONDUIT (E.M.T.)

Part Number	Conduit Size In (mm)	O.D. Size In (mm)	Wt/100 pcs Lbs (kg)
P2426	1/2	0.706	1.7
	13	17.9	0.8
P2427	3/4	0.922	2.4
	19	23.4	1.1
P2428	1	1.163	3.6
	25	29.5	1.6
P2429	1 1/4	1.510	4.6
	32	38.4	2.1
P2430	1 1/2	1.740	5.9
	38	44.2	2.7
P2431	2	2.197	8
	51	55.8	3.6

### UNI-CLIP® SUPPORTS FOR RIGID STEEL CONDUIT

Part Number	Conduit Size In (mm)	O.D. Size In (mm)	Wt/100 pcs Lbs (kg)
P2609	3/8	0.675	1.6
	10	17.1	0.7
P2611	1/2	0.840	2.3
	13	21.3	1.0
P2612	3/4	1.050	3.2
	19	26.7	1.5
P2613	1	1.315	4.1
	25	33.4	1.9
P2614	1 1/4	1.660	5.1
	32	42.2	2.3
P2615	1 1/2	1.900	6.3
	38	48.3	2.9
P2617	2	2.375	10
	51	60.3	4.5

## MATERIAL

Unistrut pipe clamps, unless noted, are punch-press made from hot-rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A1008, A575, A576, A635, or A36. The fitting steel also meets the physical requirements of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

Many items are also available in stainless steel.

Consult factory for ordering information.

## FINISHES

Pipe supports are available in:

- Electro-galvanized (EG), conforming to ASTM B633 Type III SC1
- Hot-dipped galvanized (HG), conforming to ASTM A123 or A153 (hardware)
- Perma-Green III (GR), and plain (PL).

Project: \_\_\_\_\_

Architect / Engineer: \_\_\_\_\_

Date: \_\_\_\_\_ Phone: \_\_\_\_\_

Contractor: \_\_\_\_\_

Address: \_\_\_\_\_

Notes 1: \_\_\_\_\_

Notes 2: \_\_\_\_\_

Approval Stamp: \_\_\_\_\_