



DEWALT®

ENGINEERED BY **Powers**™

Overhead Anchoring

- 3/4" Embedment
- Flush Mounted
- Internally Threaded
- For Cracked and Uncracked Concrete

CODE LISTED

ICC-ES ESR-3912

CRACKED & UNCRACKED
CONCRETE

Mini-Undercut+™

DEWALT®

ENGINEERED BY **Powers™**

Post Tension Concrete



Hollow Core Concrete



CODE APPROVED

3/4" long approved seismic anchor

PATENT PENDING GEOMETRY


patent pending design bites into concrete for undercut

STOP BIT

widened shoulder eliminates potential for over drilling; solid carbide head for quick drilling

THREADED SLEEVE

internally tapped sleeve provides full thread engagement

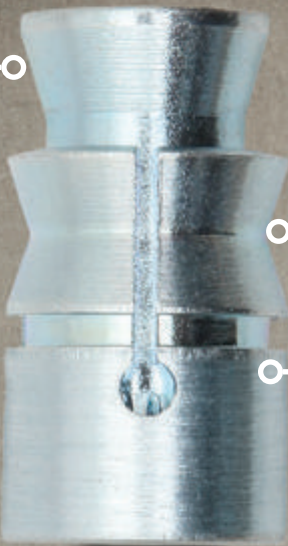

SDS+ SETTING TOOL
for fast installation



Mini-Undercut+™ Internally Threaded Undercut Anchor



Mini-Undercut+

CATALOG NUMBER	ANCHOR SIZE	ROD DIA	DRILL DIA	QTY	MASTER QTY
PFM2111820	3/8" x 3/4"	3/8"	5/8"	100	600

CATALOG NUMBER	USE ACCU-BIT	USE SDS+ SETTING TOOL
PFM2111820	PPA2431720	PFM2101720


Accu-Bit

CATALOG NUMBER	STOP BIT SIZE	ROD DIA	DRILL DIA	DRILL DEPTH	QTY
PPA2431720	5/8" x 3/4"	3/8"	5/8"	3/4"	1

SDS+ Setting Tool

CATALOG NUMBER	SETTING TOOL SIZE	ROD DIA	QTY
PFM2101720	3/8" SDS+ Setting Tool	3/8"	1

Installation Systems

CATALOG NUMBER	DESCRIPTION
DCH273P2	20V MAX* XR Brushless 1" L-shape SDS Plus Rotary Hammer Kit 

* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

Dealer Stamp

1-800-4 DEWALT®

www.DEWALT.com