




### P1834

### CHANNEL TROLLEY SUPPORT




Requires 3/8" x 2 1/2" Bolt and 3/8" Nut (not included)

<b>Design Load</b>
1200 Lbs (5.34 kN)

Wt/100 pcs: 102 Lbs (46.3 kg)

### P1834A

### CHANNEL TROLLEY SUPPORT




Requires 3/8" x 2 1/2" Bolt and 3/8" Nut (not included)

<b>Design Load</b>
2500 Lbs (11.12 kN)

Wt/100 pcs: 220 Lbs (99.8 kg)


### P2749, P2749N†



Clevis Material: 12 gauge.


\*Wheel bearings are stainless steel, and should not be lubricated.

† "N" indicates acetal wheels.



Part Number	Design Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2749	50 .22	21 9.5
P2749N	10 .04	13 5.9


### P2751, P2751 N†



Clevis Material: 12 gauge.


\*Wheel bearings are stainless steel, and should not be lubricated.

† "N" indicates acetal wheels.



Part Number	Design Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2751	100 .44	63 28.6
P2751N	20 .09	40 18.1


### P2750, P2750N†



Clevis Material: 12 gauge.


\*Wheel bearings are stainless steel, and should not be lubricated.

† "N" indicates acetal wheels.




Part Number	Design Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2750	100 .44	55 24.9
P2750N	20 .09	32 14.5

### P2950

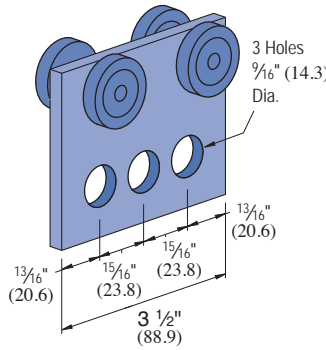


Wheel bearings are stainless steel. Do not lubricate.



Design Load In P1000		
FPM	RPM	Lbs (kN)
180	600	300 1.33
90	300	450 2.00
30	100	600 2.67

### P2949

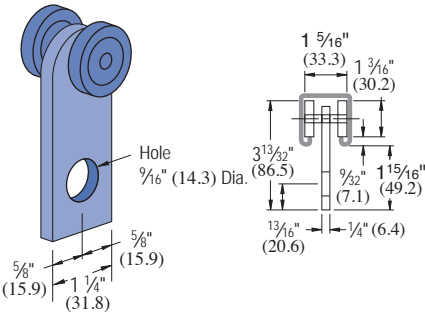

Design Load In P1000		
FPM	RPM	Lbs (kN)
180	600	150 .67
90	300	225 1.00
30	100	437 1.94

Wheel bearings are stainless steel. Do not lubricate.

Wt/100 pcs: 46 Lbs (20.9 kg)

Wt/100 pcs: 110 Lbs (49.9 kg)

Standard Dimensions for 1 1/8" (41.3mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 1 3/16" (20.6mm); Hole Spacing - On Center: 1 7/8" (47.6mm); Width: 1 1/8" (41.3mm); Thickness: 1/4" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45