

1 5/8" Channel

Telestrut

Nuts & Hardware

General Fittings

Pipe/Conduit Supports



Electrical Fittings

Concrete Inserts

Solar

Unipier®



P1184



Finish: PG, PL
Standard length: 10' (3m)

Wt/100 Ft: 27 Lbs (40.2 kg/100 m)



P1184 P



Material: Paintable PVC
Color: Green, Grey
Standard length: 10' (3m)

Wt/100 Ft: 11 Lbs (16.5 kg/100 m)



P3184



Finish: GR, PG, PL
Standard length: 10' (3m)

Wt/100 Ft: 47 Lbs (69.9 kg/100 m)



P3184 P



Material : G.E. Noryl® Plastic
Color: Green, Grey and White
Standard length: 10' (3m)

Wt/100 Ft: 9.4 Lbs (14.0 kg/100 m)



P3184 F

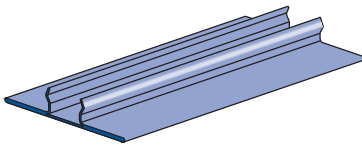

Finish: GR, PG, PL
Standard length: 16' (4.9m)

Wt/100 Ft: 90 Lbs (134 kg/100 m)

P3712 P



Material: Plastic
Color: Black
Standard length: 10' (3m)
Note: Use with P3170, P3270, and P3370 series concrete insert.

Wt/100 Ft: 5.4 Lbs (8.0 kg/100 m)