BROCHURE

UNISTRUT®

SOLAR FRAMING COMPONENTS

A PART OF




Key Advantages

- The market's only specific panel mounting components made exclusively for use with Unistrut.
- Simple design used by the industry for a variety of installation methods and applications.
- Stainless steel hardware included with all solar clamps.
- Available in Black or Silver Anodized (Material AA-6063-T6) for corrosion protection and sleek appearance.
- Best fit with Unistrut channel to create less penetration, and superior slip resistance.
- Designed for maximum loads up to 90 miles per hour.
- Available and supported by Unistrut's national network of distributors.
- BUY AMERICA MADE IN THE USA


Please inquire or visit www.unistrut.com

Unistrut Solar Co

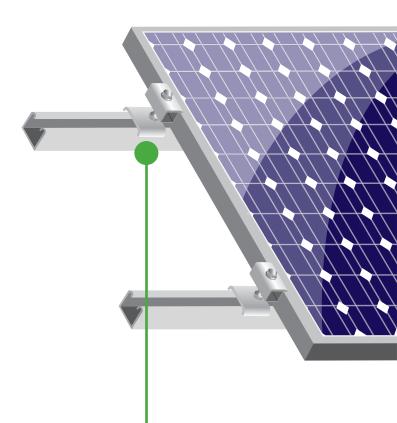

SLR200 – Solar End-Clamp

- End-clamp design for use with strut based racking system.
- Patent-pending end-stop feature allows use with vertical strut.
- Meets uplift loads of 350 lbs.
 - * Patent Pending

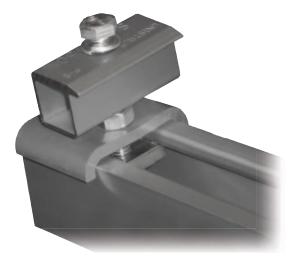







mponents

Aluminum Channel available in Silver or Black Anodized Finishes

WEEB – WMC

WASHER ELECTRICAL EQUIPMENT BONDING

- Patented design features stainless steel teeth that pierce into anodized aluminum, providing a gas tight connection which prevents oxidation.
- Meets ANSI/UL467 requirements for bonding/grounding systems.
- Quick installation that is safe, reliable and consistent.

SLR100 – Solar Mid-Clamp

- Mid-clamp design for use with strut based racking system.
- Provides .8" (21 mm) panel spacing.
- Meets spacing requirements of WEEB-WMC.
- Meets uplift loads of 350 lbs.





16100 South Lathrop Avenue Harvey, IL 60426 TOLL-FREE / 800-882-5543 FAX / 708-339-7814 www.unistrut.com 585 Finley Avenue Ajax, Ontario, L1S 2E4 Canada PHONE / 905-683-8131 FAX / 905-6<u>83-8987</u>_____

