

UNISTRUT®

General Engineering Catalog



16
No.

North American Edition



MEET MR. STRUT

Mr. Strut has symbolized Unistrut innovation for over 50 years and he's still coming up with fresh ideas and new ways to help you work easier, faster and smarter! So watch for Mr. Strut. When he's around you're never far from the Unistrut World of Support.



UNISTRUT®



The Unistrut World of Support starts with our network of Unistrut Service Centers across the nation.

The Unistrut World of Support starts with our network of Unistrut Service Centers across North America. They go far beyond providing local product inventories... by offering complete application solutions, based on experience gained from thousands of projects worldwide.

It's the kind of knowledgeable assistance that can help save time and cost now, and simplify change in the future.

Technical help? No one knows the engineering side of Unistrut support systems like your local Unistrut team. And if it's special fabrication, cutting or custom finishing you want, the pros at your local Unistrut Service Center will make it happen...quickly, efficiently, economically.

So when it's help you need, call your Unistrut Service Center—the quickest way to unlock Unistrut's World of Support.

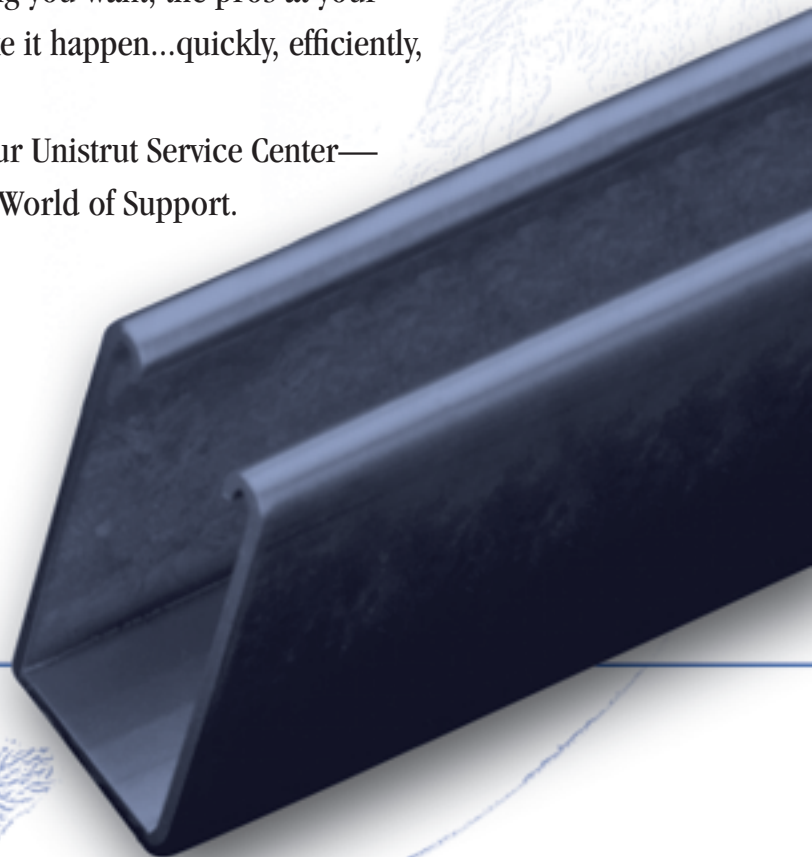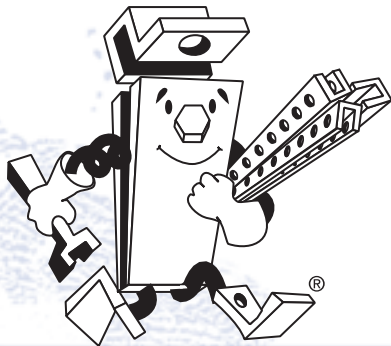



UNISTRUT


TABLE OF CONTENTS

INTRODUCTION1-20

- Unistrut Metal Framing Systems6-9
- Quality Assurance 10
- Materials and Finishes11-13
- Design Fundamentals14-15
- Conversion Factors 16
- Reference Tables and Data17-18
- Guide Specification 19
- New Products 20

1½" CHANNEL21-56

- Channel Pictorial Index 22
- Channel Selection Chart 23
- Channels & Combinations24-53
- Closure Strips 54
- End Caps & Frame Caps 55
- Load Reduction Charts 56
- Bearing Loads 56

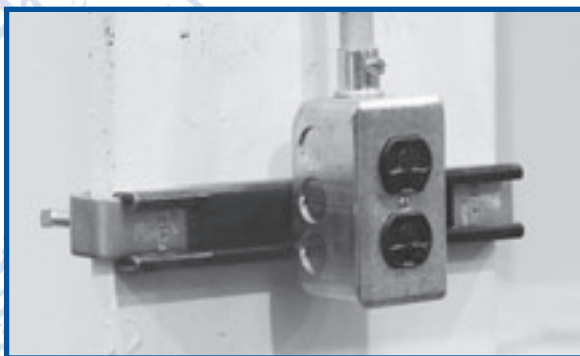

TELESTRUT® SYSTEM57-64

- Telestrut Pictorial Index58-59
- Telestrut Channels59-61
- Telestrut Connection Methods 62
- Post Bases62-63
- Cutting Chart 64

NUTS & HARDWARE65-70

- Nuts & Hardware Pictorial Index 66
- Channel Nut Loads 66
- Channel Nuts67-68
- Hardware68-70

GENERAL FITTINGS71-100

- General Fittings Pictorial Index72-73
- Design Load Data 74
- Fittings75-84
- Post Bases 84
- Brackets84-87
- Brace Fittings 88
- Beam Clamps89-95
- Trolley Assemblies 96
- Special Application Fittings97-98
- Seismic Retrofit Fittings98-100

PIPE/CONDUIT SUPPORTS101-120

- Pipe & Conduit Pictorial Index 102
- Pipe & Conduit Clamps102-105
- Unicushion® 106
- Pipe & Tubing (Cush-A-Clamps®) Clamps . .107-110
- Pipe Hangers 111
- Pipe Rollers111-112
- Pipe Brackets 113
- Pipe & Conduit Reference Data114-120

ELECTRICAL FITTINGS121-132

- Electrical Fittings Pictorial Index 122
- Electrical Fittings122-124
- Receptacles 125
- Fluorescent Fixture Hangers 125
- Electrical Accessories125-126
- Junction Boxes 126
- In-Channel Joiners 127
- Swivel Hangers 127
- Cable Entrance Tubing128-129
- Cable Entrance Fittings 130
- Electrical Technical Data131-132



CONCRETE INSERTS.....133-140

Concrete Inserts Pictorial Index..... 134
Installation & Heavy Duty Inserts.....134-135
Standard Duty & Accessories 136, 138
Light Duty..... 137
Spot Inserts..... 138
Deck Inserts..... 139
Components..... 139
Concrete Inserts Technical Data..... 140

1 1/4" FRAMING SYSTEM.....141-154


1 1/4" Framing System Pictorial Index..... 142
Channels.....143-149
Nut Selection and Load Data 150
Unistrut Nuts 150
Channel End Caps & Closure Strips..... 151
Fittings151-153
Tubing Clips..... 154
Brackets 154

1 3/16" FRAMING SYSTEM155-166

1 3/16" Framing System Pictorial Index..... 156
Channels.....157-160
Channel Nuts, Caps & Closures 161
Fittings161-165
Special Applications 165
Beam Clamps & Tubing Clips..... 166

FIBERGLASS SYSTEM.....167-182

Fiberglass Pictorial Index..... 168
Fiberglass Channel.....169-171
Fiberglass Channel Nuts & Accessories 172
Fiberglass Hardware and Accessories.....171-174
Fittings175-176
Fiberglass Post Bases 176
Fiberglass Pipe Clamps..... 177
Fiberglass Clevis Hangers..... 178
Fiberglass Beam Clamps,
Power-Rack Stanchions 179
Fiberglass Technical Data180-181
Fiberglass Sample Specifications 182

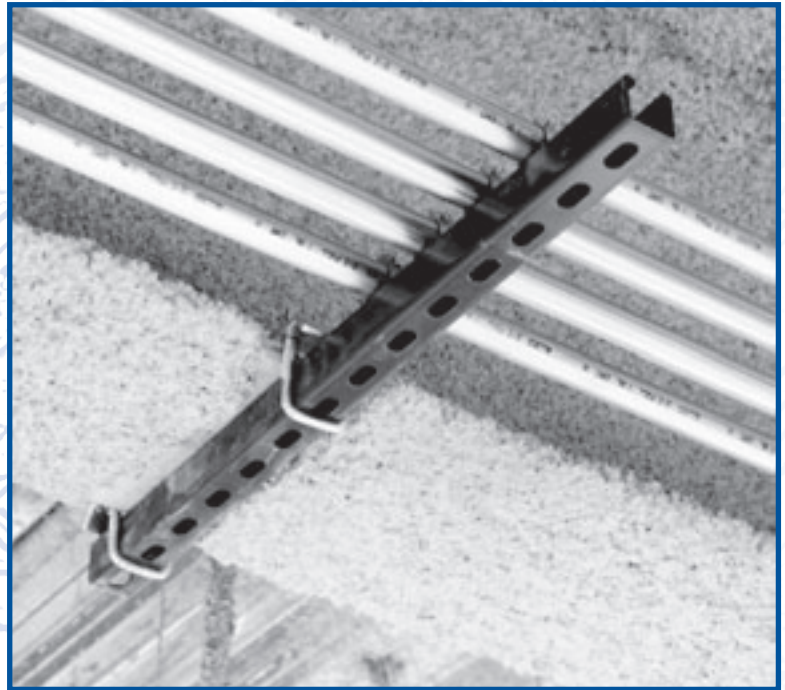

SPECIAL METALS183-188

Special Metals Pictorial Index 184
Stainless Steel 185
Stainless Steel Channel Nuts..... 186
Extruded Aluminum Channels187-188

PRIMEANGLE™189-194

PrimeAngle & Accessories 190-191
PrimeAngle Beam Loads.....192-193
PrimeAngle Column Loads..... 194


INDEX.....195-202

Part Number Index.....195-200
Keyword Index..... 201-202





Featuring The Unique Weldless Connection

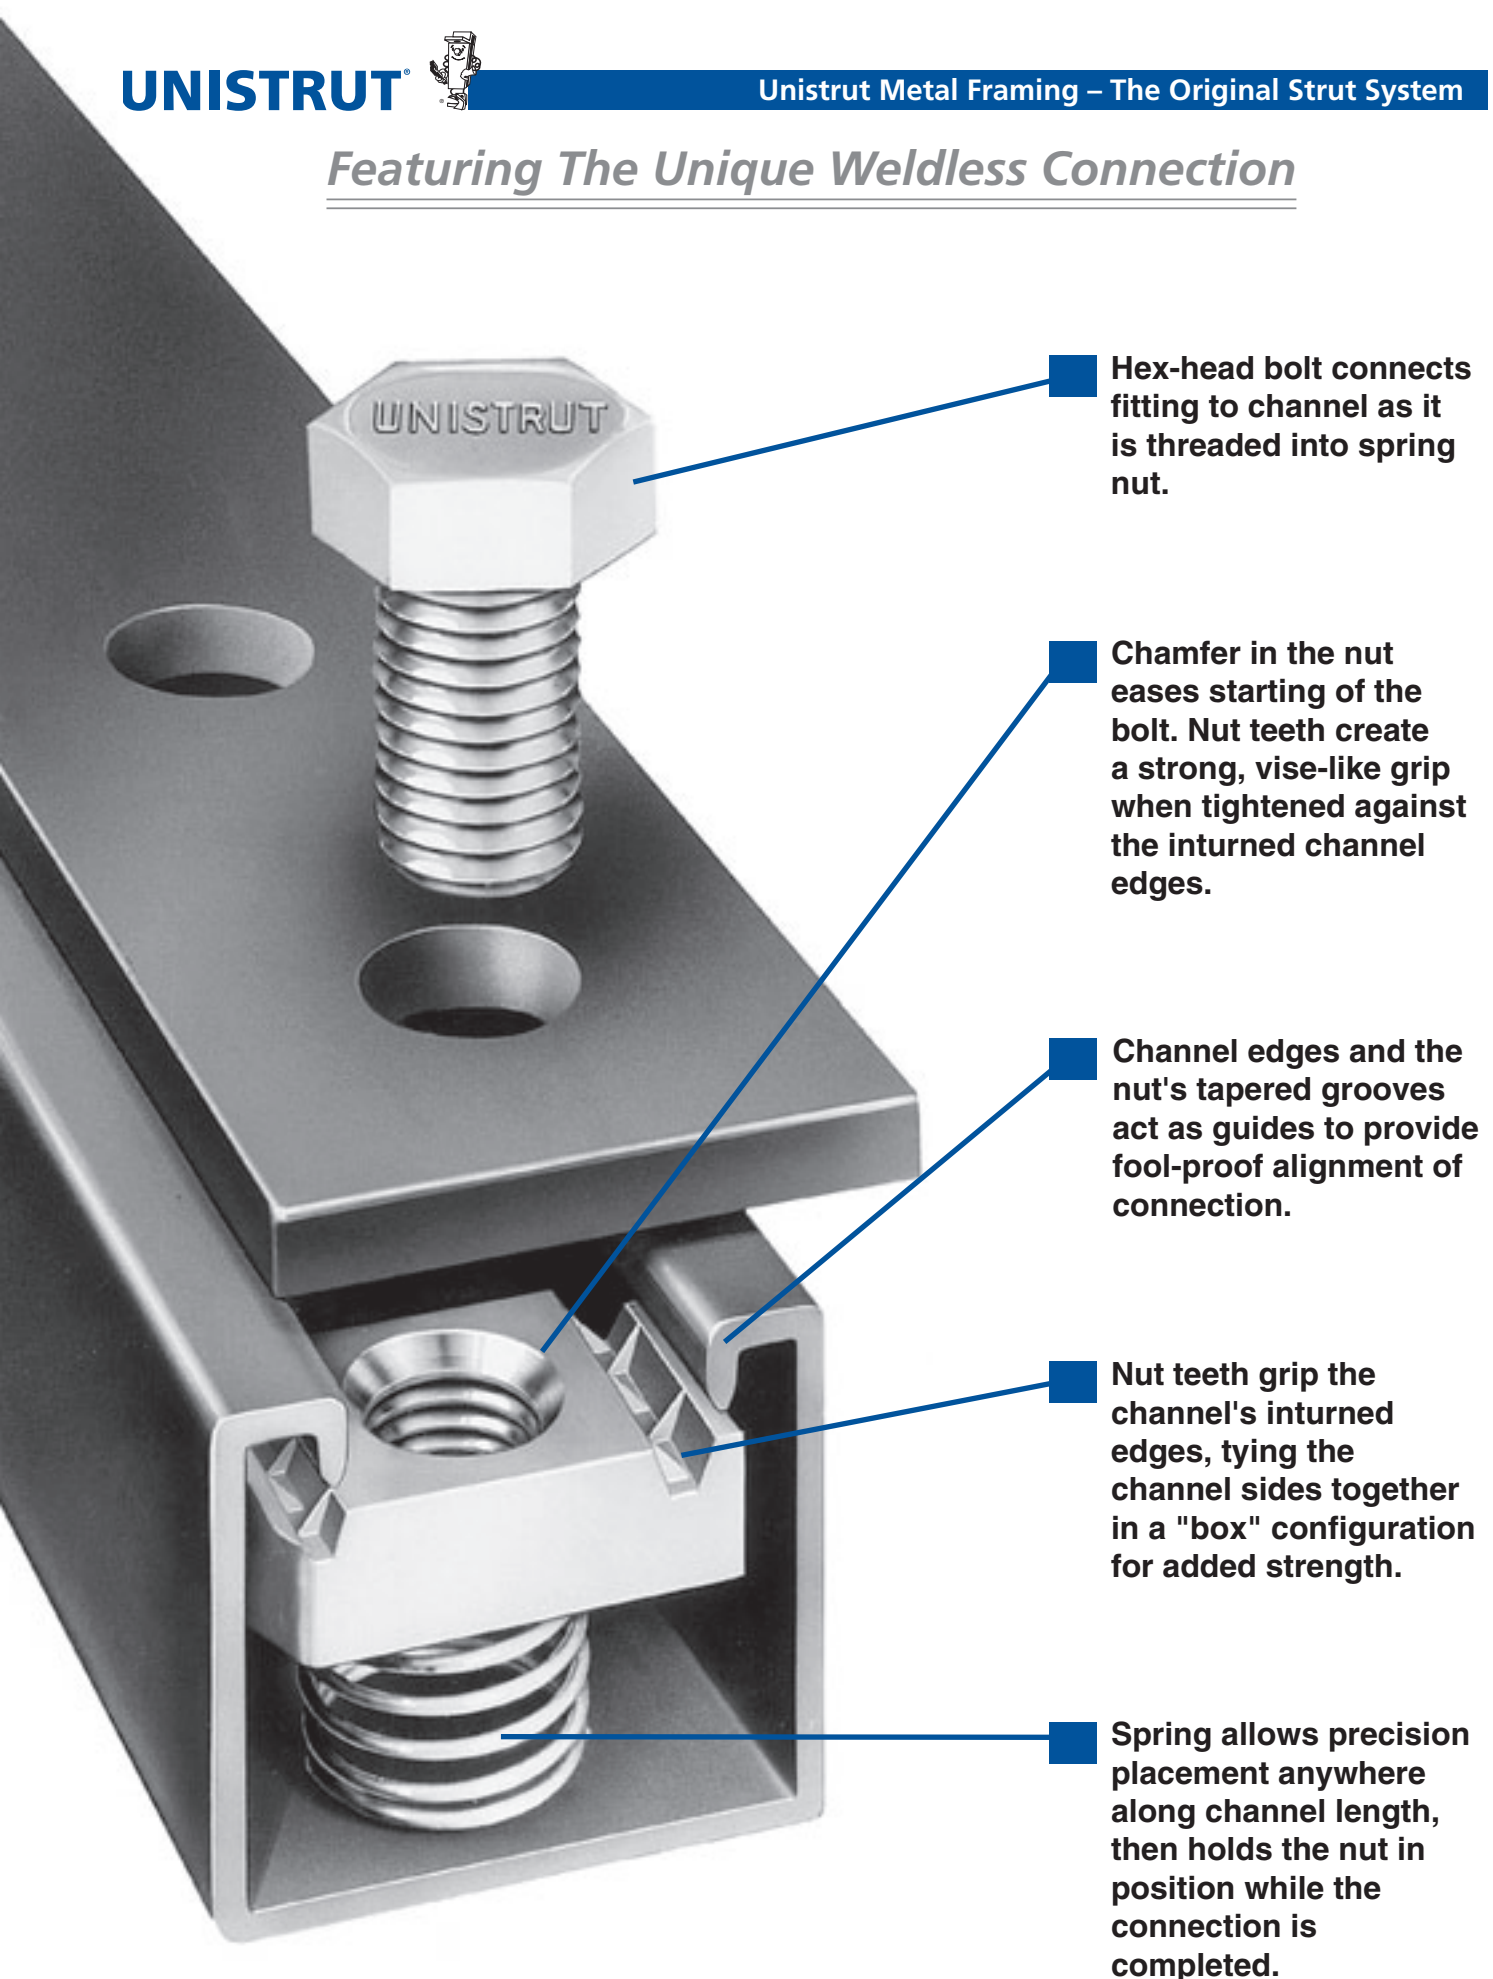

Hex-head bolt connects fitting to channel as it is threaded into spring nut.

Chamfer in the nut eases starting of the bolt. Nut teeth create a strong, vise-like grip when tightened against the inturned channel edges.

Channel edges and the nut's tapered grooves act as guides to provide fool-proof alignment of connection.


Nut teeth grip the channel's inturned edges, tying the channel sides together in a "box" configuration for added strength.

Spring allows precision placement anywhere along channel length, then holds the nut in position while the connection is completed.

Strong, Fast, Economical and Adjustable

Insert the spring nut anywhere along the continuous slotted channel. The rounded nut ends permit easy insertion.


1

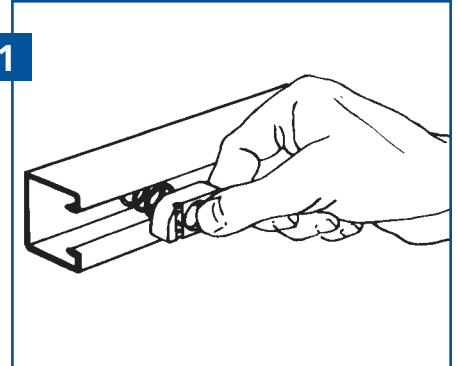

2


A 90° clockwise turn aligns the grooves in the nut with the inturned edges of the channel.

Fittings can be placed anywhere along the channel opening, permitting complete freedom of adjustment. The need for drilling holes is eliminated.

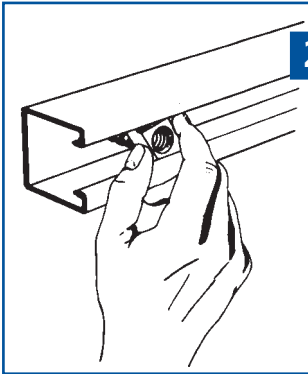


3

Insert the bolt through the fitting and into the spring nut. (See illustration 5 for end view showing the nut in place)

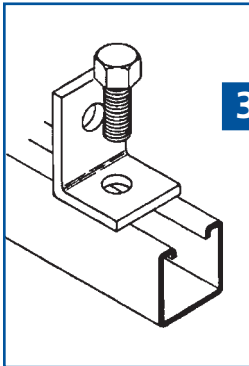


4

Additional channel sections can now be bolted to the fitting already in place by following procedure described in steps 1–3.

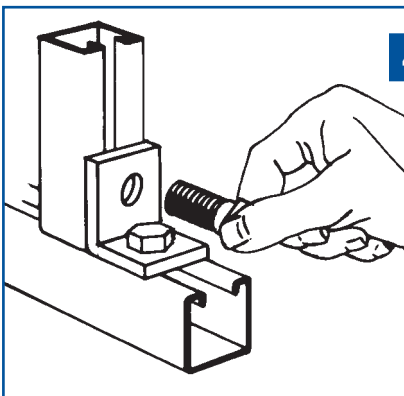

5


Tightening with a wrench locks the serrated teeth of the nut into the inturned edges of the channel, to complete a strong, vise-like connection.

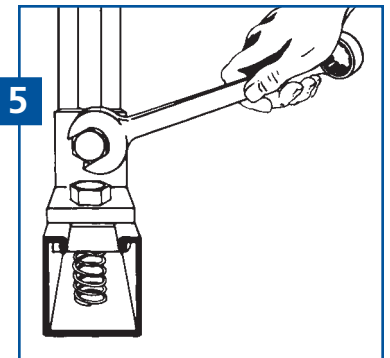



Serving Design Professionals for Over 60 Years

Unistrut products have been helping to build a better world since 1924. Used extensively in nuclear, industrial and commercial construction markets for over 75 years, Unistrut Metal Framing has set the standard for product design, quality and performance. The initial Unistrut concept — a simple spring nut and bolt connecting a fitting to a continuous slotted channel — has evolved into a comprehensive engineered building and support system.

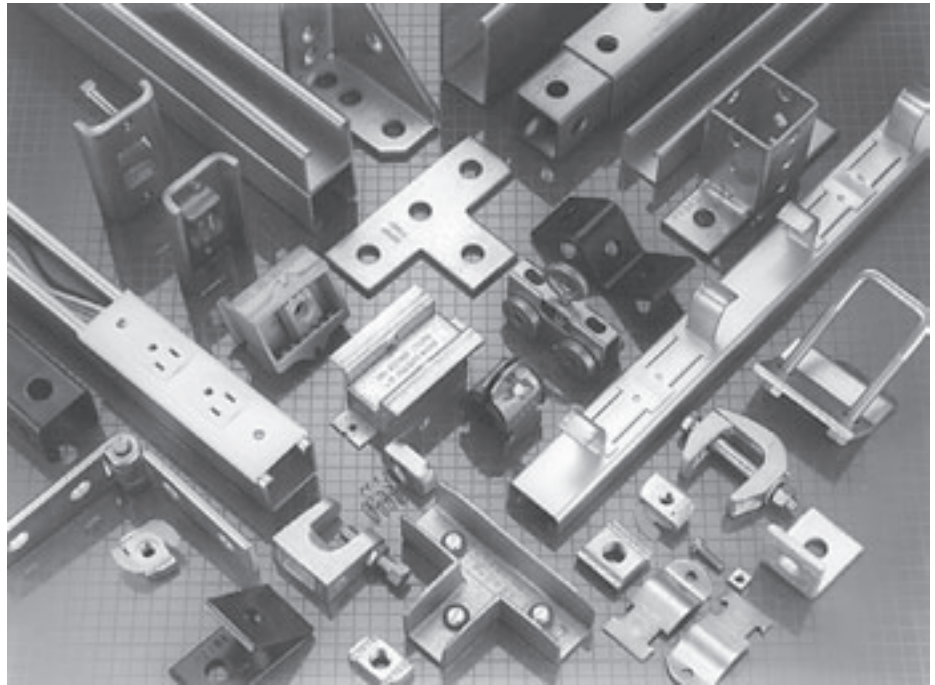


Unistrut® — The Original Metal Framing System

There is only one Unistrut Metal Framing System. It incorporates the innovative product improvements that our research and development group has created to give you the most complete and flexible support system available. Backed by our worldwide network of engineering and distribution centers, Unistrut provides customers with total-resource capability.


A North American network of Unistrut Service Centers — stocking standard Unistrut components — are located in principal cities to serve you quickly and directly. Many Service Centers are equipped to design and supply drawings for any type of metal framing application and also offer fabrication and installation services.

This catalog is a comprehensive presentation of Unistrut Metal Framing components plus technical data required by design, specification and construction professionals.

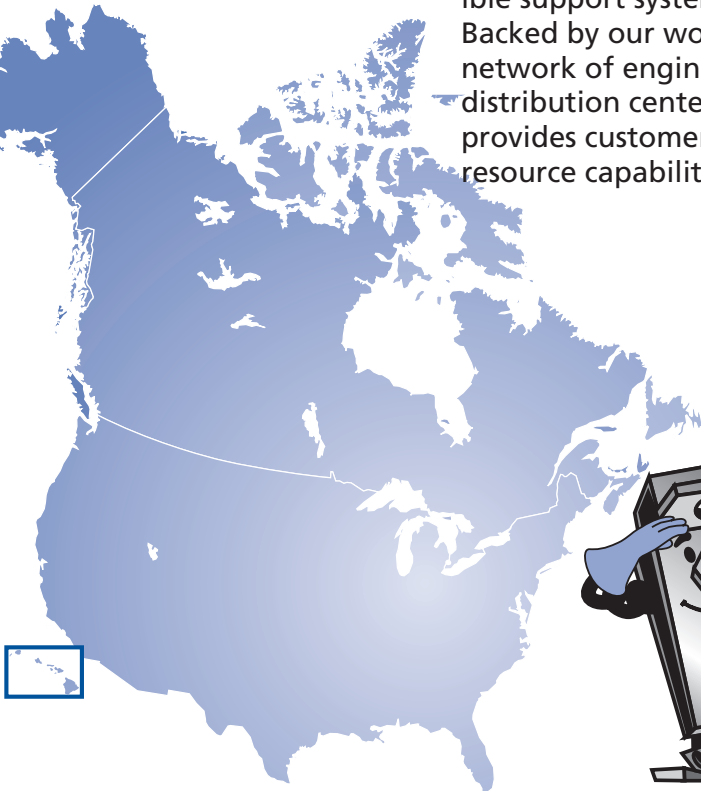


THE MOST COMPLETE METAL FRAMING SYSTEM — THREE CHANNEL-WIDTH OPTIONS

Adjustability, demountability and reusability are engineered into each of the three Unistrut channel series. Each series offers channels of varying depth and gage plus a complete line of fittings and accessories.

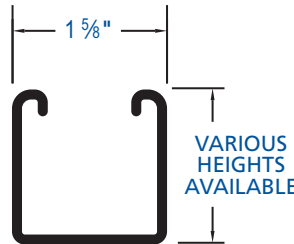1⁵/₈" width Series Channel**1⁵/₈" (41mm) width**

Designed to carry the heaviest loads and provide the widest variety of applications, the 1⁵/₈" series has become the accepted standard for use in mechanical, electrical and general construction applications where supports and attachments must meet the highest strength requirements.

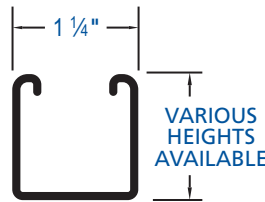1¹/₄" width Series Channel**1¹/₄" (32mm) width**

A framing system designed for medium loads, the 1¹/₄" series is especially suitable for use in the OEM, commercial and display markets. It maintains a lightness in scale and a clean line that makes it aesthetically pleasing as well as functional.

1³/₁₆" width Series Channel**1³/₁₆" (21mm) width**

A unique half-size reduction of the 1⁵/₈" channel-width series, this smaller channel size can be used to carry light loads economically in applications such as instrumentation, retail displays and light-duty laboratory supports. It also provides the flexibility found in all Unistrut framing systems.



PRODUCT LOAD TESTING

Product testing is an important Part of Unistrut's Quality Assurance Program. We utilize our own testing facilities, as well as those of independent testing laboratories, to determine design loads with proper and adequate safety factors. These design loads are indicated, where applicable, throughout the catalog. Loads are based on AISI Specification For The Design Of Cold-Formed Steel Structural Members, 2001 Edition.

Destructive and non-destructive testing procedures are used to test for variables such as corrosion, conductivity, electro-static dissipation, ultra-violet resistance, wind resistance, dimensional accuracy, material integrity and slip resistance.

In short, if there's a specification to meet, Unistrut will develop a test to quantify and verify it. Using design properties of the Unistrut framing members, load data

given in this catalog, and/or design procedures of the American Iron & Steel Institute Specification For The Design Of Cold-Formed Steel Structural Members, 2001 Edition, it is possible to design any type of structure within the capabilities of the system.

Assemblies or connections that cannot be calculated using provisions of the AISI specifications must be established by application-specific tests.

QUALITY PROGRAM

Unistrut is committed to being the "best" in the metal framing industry. In order to meet this goal, Unistrut has adopted the philosophy of "Zero Defects and Continuous Improvement". This means on-going reviews of our manufacturing processes,

operating procedures and quality systems to find ways of improving efficiency, productivity and quality. It means establishing process controls and problem-prevention techniques to ensure that superior quality is built into every Unistrut product.

Our drive to be the best includes not just quality products, but on-time delivery and prompt resolution of customer needs and concerns. At Unistrut, quality is number one.

TRACEABILITY

Unistrut channel is stamped with a numeric code that allows traceability to the origin of the steel



MATERIAL

Framing Members

Unistrut channels and continuous inserts are accurately and carefully cold-formed to size from low carbon strip steel. One side of the channel has a continuous slot with inturned edges. Secure attachments may be made to the framing member with the use of hardened, toothed, slotted nuts which engage the inturned edges.

Raw steel shall conform to the following ASTM specifications:

GAGE	FINISH	ASTM NO.
12	GR & HG	A1011 SS GR 33
	PG	A653 GR 33
14	GR & HG	A1011 SS GR 33
	PG	A653 GR 33
16	GR & HG	A1011 SS GR 33
	PG	A653 GR 33
19	GR	A1008

WEIGHTS AND DIMENSIONS


Weights given for all materials are approximate shipping weights. All dimensions are subject to commercial tolerance within published specifications.

Nuts and Bolts

Unistrut nuts are made from steel bars. After all machining operations are complete, they are thoroughly case hardened. Nuts are rectangular with ends shaped to permit a quarter turn clockwise in the framing member after insertion through the slotted opening in the channel. Two toothed grooves in the top of the nut engage the inturned edges of the channel and, after bolting operations are completed, will prevent any movement of the bolt and nut within the framing member. All bolts and nuts have Unified coarse screw threads. The standard framing nut is 1/2" and conforms to ASTM Specification A1011 SS GR 33 (material only). Screws conform to SAE J429 GR .

Fittings

Unistrut fittings, unless noted otherwise, are punch-press made from hot rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A575, A576, A635 or A36. The fitting steel also meets the physical requirement of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

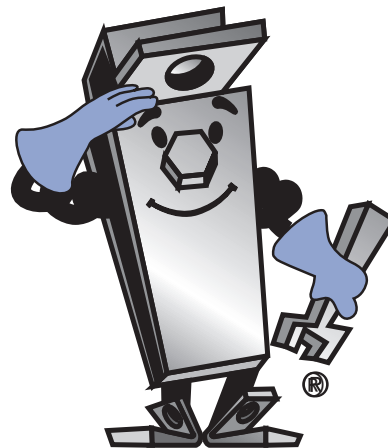

WE RESERVE THE RIGHT TO MAKE SPECIFICATION CHANGES WITHOUT NOTICE.

WHILE EVERY EFFORT HAS BEEN MADE TO ASSURE THE ACCURACY OF INFORMATION CONTAINED IN THIS CATALOG AT THE TIME OF PUBLICATION, WE CANNOT ACCEPT RESPONSIBILITY FOR INACCURACIES RESULTING FROM UNDETECTED ERRORS OR OMISSIONS.



THE BLUE COLOR USED ON UNISTRUT COMPONENTS ILLUSTRATED IN THIS CATALOG IS FOR GRAPHIC ENHANCEMENT ONLY, AND DOES NOT REPRESENT ACTUAL PRODUCT COLOR.



Perma-Green® III

The performance of Unistrut's Perma-Green III far exceeds that of conventional finishes. And compared to competitive "high-performance" coatings, Perma-Green III provides superior resistance to chalking, checking and fading and is far less vulnerable to common acidic atmospheres, solvents and alkalis.

Just as important, Perma-Green III is the result of an environmentally neutral process that virtually eliminates the toxic metals commonly found in competitive paint-based finishes.

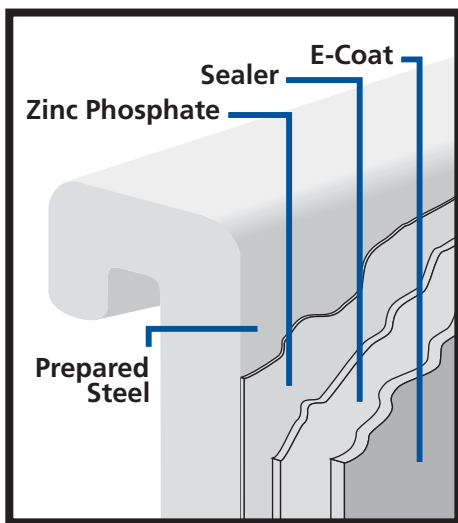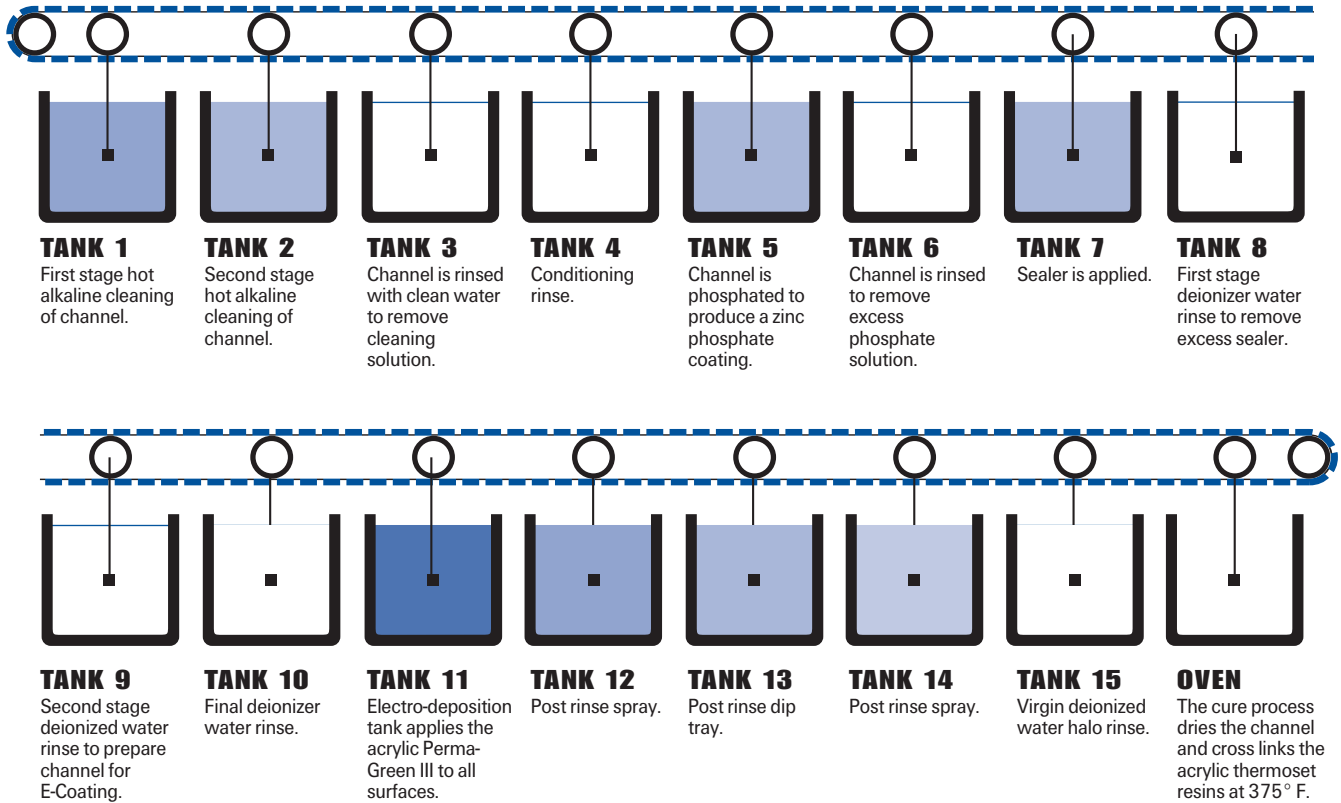

PERMA-GREEN® III (GR) TECHNICAL DATA

STEEL SUBSTRATE PREPARATION

Ten stage continuous cleaning, phosphate process.
Substrate after "prep": sealed zinc phosphate conversion coating.

COATING

Thermoset acrylic
Color:
Federal Highway Green
Color Tolerance Chart
PR Color No. 4
Hardness: 2H.
Coating Process:
Cathodic Electrodeposition.

PERFORMANCE

Salt Spray:
Scribed: exceeds 400 hours per ASTM B117. (1/8" creep)
Unscribed: exceeds 600 hours per ASTM B117. (6% red rust)
Chalk:
Nominal at 1,000 hours per weatherometer G-23 test.
Checking:
None at 1,000 hours per weatherometer G-23 test.
Fade:
Less than 50% compared to standard epoxy E.C. coatings.

ENVIRONMENTAL ISSUES

Formulated as a "heavy metal"-free coating (trace elements only).
Outgassing in service: essentially none at 350°F for 24 hours.

PLAIN (PL)

Plain finish designation means that the channel retains the oiled surface applied to the raw steel during the rolling process. The fittings have the original oiled surface of the bar-stock material.

Pregalvanized Zinc (PG) ASTM A653

Pregalvanized steel is zinc coated by a hot dip process. Steel strip from a coil is fed through a continuous zinc coater which cleans, fluxes and coats the steel with molten zinc. After cooling, the steel is recoiled.

The pregalvanized zinc coating conforms to a G-90 thickness designation per ASTM A653. The zinc thickness is .75 MIL or .45 oz./sq. ft. of surface area.

This coating is offered on Unistrut channel and tubing and is a well-proven, time-tested performer for indoor and outdoor applications. For severe corrosion applications, hot dip galvanizing, as described below, is a good alternative.

HOT DIP GALVANIZED (HG) ASTM A123 OR A153

In hot dip galvanizing, the finished part is immersed in a bath of molten zinc. This method results in complete zinc coverage and a thicker coating than pregalvanized or plated zinc.

The zinc coating is typically 2.6 MIL or 1.5 oz./sq. ft. of surface area.

This is the coating of choice for applications where severe corrosion is a design factor.

SPECIAL COATING

When specific applications require other than standard available finishes, special finishes can be supplied per customer requirements.

Electroplated Zinc (EG) ASTM B633, Type III SC1 or SC3

In the electroplating process, the part to be zinc coated is immersed in a solution of zinc ions. An electric current causes the zinc to be deposited on the part.

SC1 (mild) has a Zinc coating of 0.2 and is recommended for dry indoor use. SC1 is the standard finish thickness.

SC3 (Severe) has a Zinc coating of 0.5 mill and is the standard finish thickness only on UL Listed raceway products.

Perma-Gold (ZD) ASTM B633, Type II SC1 or SC3

Similar to the EG process except in a yellow color.

SC1 (mild) has a Zinc coating of 0.2 and is recommended for dry indoor use. SC1 is the standard finish thickness

SC3 (Severe) has a Zinc coating of 0.5 mill and is the standard finish thickness only on UL Listed raceway products.

Zinc Coating

Unistrut products are available in four types of zinc coatings:

- Electroplated (EG)
- Perma-Gold (ZD)
- Pregalvanized (PG)
- Hot Dip Galvanized (HG).


Zinc offer two types of protection:

- Barrier: The zinc coating protects the steel substrate from direct contact with the environment.
- Sacrificial: The zinc coating will protect scratches, cut edges, etc. through an anodic sacrificial process.

The service life of zinc coating is directly related to the zinc coating thickness as shown below.

Comparison of Zinc Finishes	
Finish	Zinc Thickness
Hot Dip Galvanized	2.6 MIL
Pre-galvanized	0.75 MIL
Electro-Galvanized (SC1)	0.2 MIL
Electro-Galvanized (SC3)	0.5 MIL
Perma-Gold (SC1)	0.2 MIL
Perma-Gold (SC3)	0.5 MIL

As shown in the graph, when the zinc coating is double, the service life is double under most conditions.

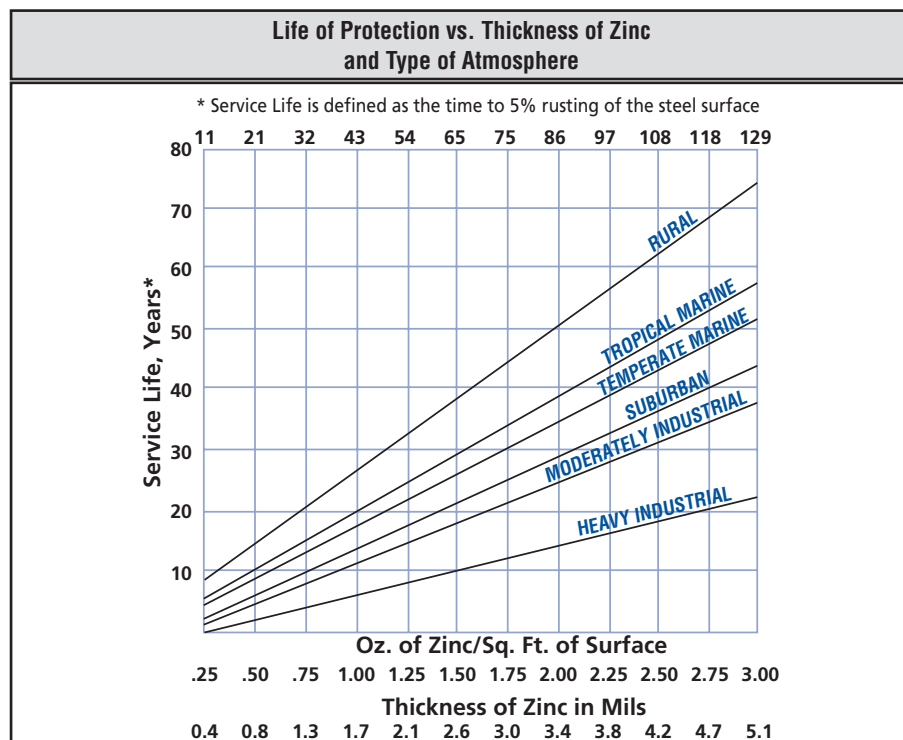




BEAMS

Beams are structural members loaded at right angles (perpendicular) to their length. Most beams are horizontal and subjected to gravity or vertical loads, e.g. a shelf support. However a vertical member can act as a beam under certain conditions, such as a curtain wall mullion subjected to wind loading. The bending moment developed in a beam is dependent on:


- (a) the amount of load applied,
- (b) the type of loading applied, and
- (c) the support conditions.

BEAM LOADING - POINT LOAD

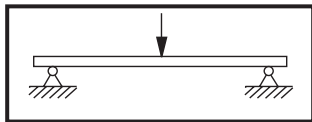

A load concentrated onto a very small length of the beam is a point load.


BEAM LOADING - UNIFORM LOAD

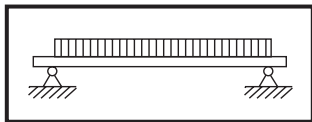

A load spread evenly over a relatively long length of the beam is a uniform load.


Point and uniform loads can be placed on a beam in any combination. A series of point loads can approximate a uniform loading. The load charts and tables are based on a uniform load unless identified otherwise.

SUPPORT CONDITIONS - SIMPLE BEAM

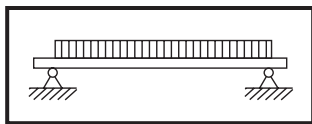


A simple beam has supports that prevent movement left and right, or up and down, but do not restrain the beam from rotating at the supports into a natural deflected curve. Most Unistrut Metal Framing connections produce simple beams. The load charts and tables are based on simple beams unless identified otherwise.

SUPPORT CONDITIONS - CONTINUOUS BEAM

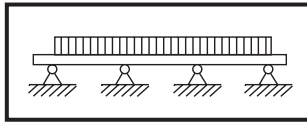

Any simple beam that is supported at one or more intermediate points is a continuous beam. A mezzanine joist that passes over three or more columns is an example of a continuous beam.


SUPPORT CONDITIONS - FIXED-END BEAM

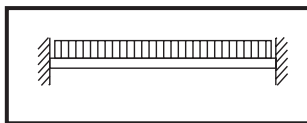

Supports that prevent the beam from


rotating into a natural deflected curve produce a fixed-end beam. A welded end connection to very rigid support produces a fixed-end beam.

SUPPORT CONDITIONS - CANTILEVER BEAM

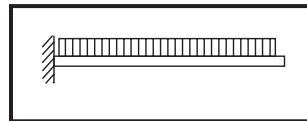

A cantilever beam is a fixed-end beam that is supported at one end only, while the other end is unsupported. Unistrut brackets are examples of cantilever beams.

DEFLECTION

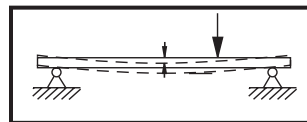

All beams deflect under load. The amount of deflection is dependent on

- (a) the amount of load,
- (b) the support conditions,
- (c) the stiffness of the beam's cross-sectional shape, and
- (d) the stiffness of the beam material.

The stiffness of the beam's cross-sectional shape is measured by its "Moment Of Inertia" or "I". The larger a beam's "I", the stiffer it is and the less it will deflect. A beam's "I" can change for each major axis. The "I" of both major axes (I 1-1 and I 2-2) are provided.

The stiffness of a beam's material is measured by its "Modulus of Elasticity" or "E". The larger a material's "E", the stiffer it is and the less it deflects. For example, steel is about three times stiffer than aluminum and as a result, deflects only one-third as much. Do not confuse stiffness with strength. Two materials may have identical strengths yet still have different "E's". A high-strength aluminum may be as strong as steel and still deflect three times as much.

The load charts and tables give calculated deflections for the loads shown. In many cases, a final design will be determined by the maximum deflection, not the maximum load.

BENDING MOMENT

Is it strong enough? This is the final consideration for any beam. A beam must not only hold up the anticipated loads, but must also have sufficient additional capacity to safely hold unforeseen variations in applied loads and material strengths. This additional capacity is called a safety factor and is usually regulated by the various design codes and standards. A beam's strength is usually measured by an allowable bending moment or an allowable stress. The traditional approach is the allowable stress method, where a beam is determined to have a maximum allowable stress (in pounds per square inch) which is not to be exceeded.

The approach of the current AISI "Specification For The Design Of Cold-Formed Steel Structural Members" is to use a maximum allowable bending moment (in inch-pounds) which is not to be exceeded. Bending moment divided by a beam's section modulus or "S" equals stress.

COLUMNS

Columns are structural members that are loaded parallel to their length. Most columns are vertical and are used to carry loads from a higher level to a lower level. However any member subjected to compression loads, such as a diagonal or prop brace, is a column.

A column fails by “buckling”, which is a sudden loss of straightness and subsequent collapse. Allowable column load is dependent on:

- (a) the length of column,
- (b) the type of loading,
- (c) the support conditions, and
- (d) the column’s cross-sectional shape and material.

COLUMN LENGTH

The column length is measured from braced point to braced point. A braced point is where the column is restrained from lateral movement (translation) in all directions.

COLUMN LOADING – CONCENTRIC LOADING

Loads applied to the center of gravity of the column cross-section are considered concentric. A beam that passes over and rests on the top of a column is an example of concentric loading.

COLUMN LOADING – ECCENTRIC LOADING

Any load which is not concentric is eccentric. The amount of eccentricity (in inches) has a major effect on the load-carrying capacity of any particular column. A load that is transmitted to a Unistrut Metal Framing column using a standard fitting bolted to the slot face is considered eccentric.


The load tables give allowable loads for both concentric (loaded at C.G.) and certain eccentric (loaded at slot face) loading. Allowable loads for other eccentric loading must be determined by a qualified design professional.

SUPPORT CONDITIONS

Based on the support conditions, an appropriate “K” value is selected. This “K” value, which mathematically describes the column end conditions, is used in the column design equations. The most common support condition combinations are as follows:


SUPPORT CONDITIONS - FIXED TOP – FIXED BOTTOM

Both ends are restrained against rotation and lateral movement (translation).

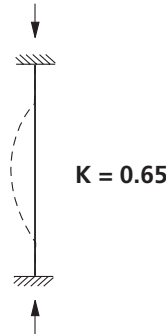

SUPPORT CONDITIONS - PINNED TOP – FIXED BOTTOM


The top is restrained against lateral movement (translation) but is allowed to rotate. The bottom is restrained against rotation and lateral movement.

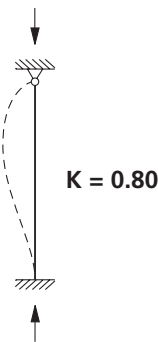

This is a common support condition and is used to construct the allowable column load applied at the Slot Face tables.


SUPPORT CONDITIONS - PINNED TOP – PINNED BOTTOM

Both ends are restrained against lateral movement (translation) but, are allowed to rotate.

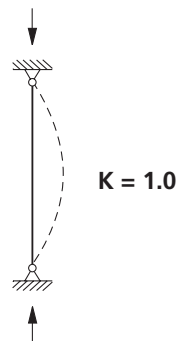

SUPPORT CONDITIONS - FIXED / FREE TOP – FIXED BOTTOM

The top is restrained against rotation but is allowed to move laterally. The bottom is restrained against rotation and lateral movement (translation).

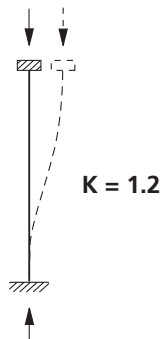

CROSS-SECTIONAL SHAPE

The cross-sectional shape of a column member determines the value of its “Radius of Gyration” or “r”. In general, a member with a large “r” makes a better column than a member with a small “r”. Each axis of a column has a different “r”. Typically the axis with the smallest “r” determines the final design.

BOLT TORQUE

Bolt torque values are given to ensure the proper connection between Unistrut Metal Framing components. It is important to understand that there is a direct, but not necessarily consistent, relationship between bolt torque and tension in the bolt. Too much tension in the bolt can cause it to break or crush the component parts. Too little tension in the bolt can prevent the connection from developing its full load capacity. The torque values given have been developed over many years of experience and testing.

Bolt Torque						
BOLT SIZE	1/4" -20	5/16" -18	3/8" -16	1/2" -13	5/8" -11	3/4" -10
Rec. Torque Ft/Lbs (N•m)	6 (8)	11 (15)	19 (26)	50 (68)	100 (136)	125 (170)
Max Torque Ft/Lbs (N•m)	7 (9)	15 (20)	25 (34)	70 (95)	125 (170)	135 (183)

These are based on using a properly calibrated torque wrench with a clean dry (non-lubricated) Unistrut fitting, bolt and nut. A lubricated bolt or nut can cause extremely high tension in the connection and may lead to bolt failure. It must be noted that the accuracy of commercial torque wrenches varies widely and it is the responsibility of the installer to ensure that proper bolt torque has been achieved.












UNIT CONVERSIONS

To Convert From	English To Metric To	Multiply By
Length		
Inch [in]	Millimeter [mm]	25.400 000
Foot [ft]	Meter [m]	0.304 800
Yard [yd]	Meter [m]	0.914 400
Mile [mi] (U.S. Statute)	Kilometer [km]	1.609 347
Area		
Square Inch [in ²]	Square Millimeter [mm ²]	645.16
Square Foot [ft ²]	Square Meter [m ²]	0.092 903
Square Yard [yd ²]	Square Meter [m ²]	0.836 127
Square Mile [mi ²] (U.S. Statute)	Square Kilometer [km ²]	2.589 998
Acre	Square Meter [m ²]	4046.873
Acre	Hectare	0.404 687
Volume		
Cubic Inch [in ³]	Cubic Millimeter [mm ³]	16387.06
Cubic Foot [ft ³]	Cubic Meter [m ³]	0.028 317
Cubic Yard [yd ³]	Cubic Meter [m ³]	0.764 555
Gallon [gal] (U.S. Liquid)	Litre [l]	3.785 412
Quart [qt] (U.S. Liquid)	Litre [l]	0.946 353
Mass		
Ounce (Avoirdupois) [oz]	Gram [g]	28.349 520
Pound (Avoirdupois) [lb]	Kilogram [kg]	0.453 592
Short Ton	Kilogram [kg]	907.185
Force		
Ounce-Force	Newton [N]	0.278 014
Pound-Force [lbf]	Newton [N]	4.448 222
Bending Moment		
Pound-Force-Inch [lbf-in]	Newton-Meter [N-m]	0.112 985
Pound-Force-Foot [lbf-ft]	Newton-Meter [N-m]	1.355 818
Pressure, Stress		
Pound-Force per Square Inch [lbf/in ²]	Kilopascal [kPa]	6.894 757
Foot of Water (39.2 F)	Kilopascal [kPa]	2.988 980
Inch of Mercury (32 F)	Kilopascal [kPa]	3.386 380
Energy, Work, Heat		
Foot-Pound-Force [ft-lbf]	Joule [J]	1.355 818
British Thermal Unit [Btu]	Joule [J]	1055.056
Calorie [cal]	Joule [J]	4.186 800
Kilowatt Hour [kW-h]	Joule [J]	3,600,000
Power		
Foot-Pound-Force /Second [ft-lbs/s]	Watt [W]	1.355 818
British Thermal Unit /Hour [Btu/h]	Watt [W]	0.293 071
Horsepower [hp] (550 Ft. Lbf/s)	Kilowatt [kW]	0.745 700
Angle		
Degree	Radian [rad]	0.017 453
Temperature		
Degree Fahrenheit [°F]	Degree Celsius [°C]	(F° - 32)/1.8










To Convert From	Metric to English To	Multiply By
Length		
Millimeter [mm]	Inch [in]	0.039 370
Meter [m]	Foot [ft]	3.280 840
Meter [m]	Yard [yd]	1.093 613
Kilometer [km]	Mile [mi] (U.S. Statute)	0.621 370
Area		
Square Millimeter [mm ²]	Square Inch [in ²]	0.001550
Square Meter [m ²]	Square Foot [ft ²]	10.763 915
Square Meter [m ²]	Square Yard [yd ²]	1.195 991
Square Kilometer [km ²]	Square Mile [mi ²] (U.S. Statute)	0.386 101
Square Meter [m ²]	Acre	0.000 247
Hectare	Acre	2.471 046
Volume		
Cubic Millimeter [mm ³]	Cubic Inch [in ³]	0.000061
Cubic Meter [m ³]	Cubic Foot [ft ³]	35.314 662
Cubic Meter [m ³]	Cubic Yard [yd ³]	1.307 950
Litre [l]	Gallon [gal] (U.S. Liquid)	0.264 172
Litre [l]	Quart [qt] (U.S. Liquid)	1.056 688
Mass		
Gram [g]	Ounce (Avoirdupois) [oz]	0.035 274
Kilogram [kg]	Pound (Avoirdupois) [lb]	2.204 624
Kilogram [kg]	Short Ton	0.00110
Force		
Newton [N]	Ounce-Force	3.596 941
Newton [N]	Pound-Force [lbf]	0.224 809
Bending Moment		
Newton-Meter [N-m]	Pound-Force-Inch [lbf-in]	8.850 732
Newton-Meter [N-m]	Pound-Force-Foot [lbf-ft]	0.737 562
Pressure, Stress		
Kilopascal [kPa]	Pound-Force per Square Inch [lbf/in ²]	0.145 038
Kilopascal [kPa]	Foot of Water (39.2 F)	0.334 562
Kilopascal [kPa]	Inch of Mercury (32 F)	0.295 301
Energy, Work, Heat		
Joule [J]	Foot-Pound-Force [ft-lbf]	0.737 562
Joule [J]	British Thermal Unit [Btu]	0.000948
Joule [J]	Calorie [cal]	0.238 846
Joule [J]	Kilowatt Hour [kW-h]	2.78 ⁻⁷
Power		
Watt [W]	Foot-Pound-Force /Second [ft-lbs/s]	0.737 562
Watt [W]	British Thermal Unit /Hour [Btu/h]	3.412 142
Kilowatt [kW]	Horsepower (550 Ft. Lbf/s) [hp]	1.341 022
Angle		
Radian [rad]	Degree	57.295 788
Temperature		
Degree Celsius [°C]	Degree Fahrenheit [°F]	1.8xC°+32

BEAM SUPPORT CONDITIONS










Cantilever Beams

 <p> $V_{max.} = P$ $M_{max.} = PL$ $\Delta_{max.} = \frac{PL^3}{3EI}$ </p>  	 <p> $V_{max.} = W$ $M_{max.} = \frac{WL}{2}$ $\Delta_{max.} = \frac{WL^3}{8EI}$ </p>  	 <p> $V_{max.} = P$ $M_{max.} = Pb$ $\Delta_{max.} = \frac{Pb^2(3L-b)}{6EI}$ </p>  
---	---	---










Simple Beams

 <p> $R = \frac{P}{2}$ $V_{max.} = \frac{P}{2}$ $M_{max.} = \frac{PL}{4}$ $\Delta_{max.} = \frac{PL^3}{48EI}$ </p>  	 <p> $R = \frac{W}{2}$ $V_{max.} = \frac{W}{2}$ $M_{max.} = \frac{WL}{8}$ $\Delta_{max.} = \frac{5WL^3}{384EI}$ </p>  	 <p> $R_1 = \frac{Pb}{L}$ $R_2 = \frac{Pa}{L}$ $V_{max.} = \frac{Pa}{L}$ $M_{max.} = \frac{Pab}{L}$ $\Delta_{max.} = \frac{Pab(a+2b)}{27EI} \sqrt{3a(a+2b)}$ </p>  
--	--	--

Beams Fixed At One End & Supported At The Other

 <p> $R_1 = \frac{5P}{16}$ $V_{max.} = \frac{11P}{16}$ $M_{max.} = \frac{3PL}{16}$ $\Delta_{max.} \text{ at } x = 0.447L$ $\Delta_{max.} = 0.009317 \frac{PL^3}{EI}$ </p>  	 <p> $R_1 = \frac{3W}{8}$ $V_{max.} = \frac{5W}{8}$ $M_{max.} = \frac{WL}{8}$ $\Delta_{max.} \text{ at } x = 0.4215L$ $\Delta_{max.} = \frac{WL^3}{185EI}$ </p>  	 <p> $R_1 = \frac{Pb^2}{2L^3}(a+2L)$ $R_2 = \frac{Pa}{2L^3}(3L^2-a^2)$ $M \text{ at point of load} = R_1a$ $M \text{ at fixed end} = \frac{Pab}{2L^3}(a+L)$ </p>  
---	---	--

Beams Fixed At Both Ends

 <p> $V_{max.} = \frac{P}{2}$ $M_{max.} = \frac{PL}{8}$ $\Delta_{max.} = \frac{PL^3}{192EI}$ </p>  	 <p> $V_{max.} = \frac{W}{2}$ $M_{max.} = \frac{WL}{12}$ $\Delta_{max.} = \frac{WL^3}{384EI}$ </p>  	 <p> $R_1 = \frac{Pb^2}{L^3}(3a+b)$ $R_2 = \frac{Pa^2}{L^3}(a+3b)$ $M_1 = \frac{Pab^2}{L^2}$ $M_2 = \frac{Pa^2b}{L^2}$ </p>  
---	--	---

R – Reaction
 M – Moment
 P – Concentrated Load












W – Total Uniform Load
 V – Shear
 L – Length

Δ – Deflection
 E – Modulus of Elasticity
 I – Moment of Inertia




CONVERSION FACTORS FOR BEAMS WITH VARIOUS STATIC LOADING CONDITIONS

All Beam Load tables are for single-span (simple) beams supported at the ends. These can be used in the majority of the cases. However, there are times when it is necessary to know what happens with other loading and support conditions. Some common arrangements are shown below. Simply multiply the values from the Beam Load tables by factors given below

Load and Support Condition		Load Factor	Deflection Factor
1. Simple Beam, Uniform Load		1.00	1.00
2. Simple Beam, Concentrated Load at Center		.50	.80
3. Simple Beam, Two Equal Concentrated Loads at 1/4 pts		1.00	1.10
4. Beam Fixed at Both Ends, Uniform Load		1.50	.30
5. Beam Fixed at Both Ends, Concentrated Load at Center		1.00	.40
6. Cantilever Beam, Uniform Load		.25	2.40
7. Cantilever Beam, Concentrated Load at End		.12	3.20
8. Continuous Beam, Two Equal Spans, Uniform Load on One Span		1.30	.92
9. Continuous Beam, Two Equal Spans, Uniform Load on Both Ends		1.00	.42
10. Continuous Beam, Two Equal Spans, Concentrated Load at Center of One Span		.62	.71
11. Continuous Beam, Two Equal Spans, Concentrated Load at Center of Each Span		.67	.48

EXAMPLE I:

Determine load and deflection of a P 1000 beam continuous over one support and loaded uniformly on one span.




SOLUTION:

- From load table for P1000 on page 25 load for a 5'-0" span is 680# and deflection is .35".
- Multiply by factors from Table above.
Load = 680# x 1.30 = 884#
Deflection = .35" x .92 = .32"

EXAMPLE II

Determine load and deflection of a P 5500 cantilever beam with a concentrated load on the end.



SOLUTION:

- From load table P5500 on page 52 load for a 3'-0" span is 2180# and deflection is .09".
- Multiply by factors from Table above.
Load = 2180# x .12 = 262#
Deflection = .09" x 3.20 = .29"

PART I - GENERAL**1.01 SCOPE OF WORK**

- A. Provide all Unistrut Metal Framing material, fittings and related accessories (Strut System) as indicated on the Contract Drawings.
- B. Provide all labor, supervision, engineering, and fabrication required for installation of the Strut System in accordance with the Contract Drawings and as specified herein.
- C. Related work specified elsewhere.

1.02 QUALITY ASSURANCE

- A. Manufacturer's qualifications:
 - 1. The manufacturer shall not have had less than 10 year's experience in manufacturing Strut Systems.
 - 2. The manufacturer must certify in writing all components supplied have been produced in accordance with an established quality assurance program.
- B. Installer's qualifications:
 - 1. Installer must be a Unistrut trained manufacturer's authorized representative/installer with not less than 5 years experience in the installation of Strut Systems of this size and conformation.
 - 2. All Strut System components must be supplied by a single manufacturer.
- C. Standards:
 - 1. Work shall meet the requirements of the following standards:
 - a. Federal, State and Local codes.
 - b. American Iron and Steel Institute (AIS) Specification for the Design of Cold-Formed Steel Structural Members 2001 Edition.
 - c. American Society for Testing And Materials (ASTM).

1.03 SUBMITTALS

- A. Structural Calculations and Shop Drawings
 - 1. Submit structural calculations for approval by the project engineer. Calculations may include, but are not limited to:
 - a. Description of design criteria.
 - b. Stress and deflection analysis.
 - c. Selection of Unistrut framing members, fittings, and accessories.
 - 2. Submit all shop/assembly drawings necessary to completely install the Strut System in compliance with the Contract Drawings.
 - 3. Submit all pertinent manufacturer's published data.

1.04 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. All material is to be delivered to the work site in original factory packaging to avoid damage to the finish.
- B. Upon delivery to the work site, all components shall be protected from the elements by a shelter or other covering.

1.05 GUARANTEE

- A. Separate guarantees shall be issued from the erector and manufacturer, valid for a period of 1 year, against any defects that may arise from the installation or manufacture of the Strut System components.

PART 2 - PRODUCTS**2.01 ACCEPTABLE MANUFACTURERS**

- A. All Strut System components shall be as manufactured by UNISTRUT CORPORATION or approved equal as determined by the Architect or Engineer of record in writing 10 days prior to bid date.

2.02 MATERIALS

- A. All channel members shall be fabricated from structural grade steel conforming to one of the following ASTM specifications: A 1011 SS GR 33, A 653 GR 33.
- B. All fittings shall be fabricated from steel conforming to one of the following ASTM specifications: A 575, A 576, A 36 or A 635.
- C. Substitutions
 - Any substitutions of product or manufacturer must be approved in writing ten days prior to bid date, by Architect or Engineer of record.

2.03 FINISHES

- A. Strut System components shall be finished in accordance with one of the following standards:
 - 1. PERMA-GREEN® III (GR)
 - Rust inhibiting acrylic enamel paint applied by electro-deposition, after cleaning and phosphating, and thoroughly baked. Color is per Federal Highway Green, Color Tolerance Chart PR Color No. 4. Finish to withstand minimum 400 hours salt spray when tested in accordance with ASTM B117.
 - 2. ELECTRO-GALVANIZED (EG)
 - Electrolytically zinc coated per ASTM B 633 Type III SC 1

- 3. PRE-GALVANIZED (PG)
 - Zinc coated by hot-dipped process prior to roll forming. The zinc weight shall be G90 conforming to ASTM A 653.
- 4. HOT-DIPPED GALVANIZED (HG)
 - Zinc coated after all manufacturing operations are complete. Coating shall conform to ASTM A 123 or A 153.
- 5. SPECIAL COATING / MATERIAL
 - (Describe as applicable)

PART 3 - EXECUTION**3.01 EXAMINATION**

- A. The installer shall inspect the work area prior to installation. If work area conditions are unsatisfactory, installation shall not proceed until satisfactory corrections are completed.

3.02 INSTALLATION

- A. Installation shall be accomplished by a fully trained manufacturer authorized installer.
- B. Set Strut System components into final position true to line, level and plumb, in accordance with approved shop drawings.
- C. Anchor material firmly in place. Tighten all connections to their recommended torques.


3.03 CLEANUP

- A. Upon completion of this section of work, remove all protective wraps and debris. Repair any damage due to installation of this section of work.

3.04 PROTECTION


- A. During installation, it shall be the responsibility of the installer to protect this work from damage.
- B. Upon completion of this scope of work, it shall become the responsibility of the general contractor to protect this work from damage during the remainder of construction on the project and until substantial completion.

P1016 MISSING LINK MULTI-PURPOSE STRUT FASTENER

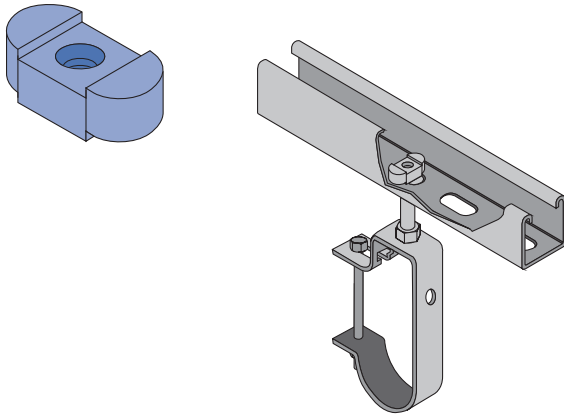


See Page 67

P2486 SEISMIC ROD STIFFENER

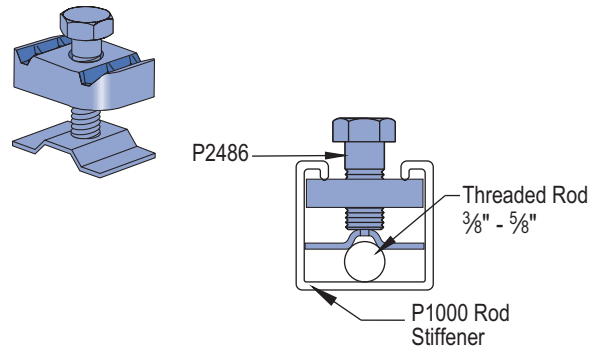


See Page 70

KWIK WASHER™

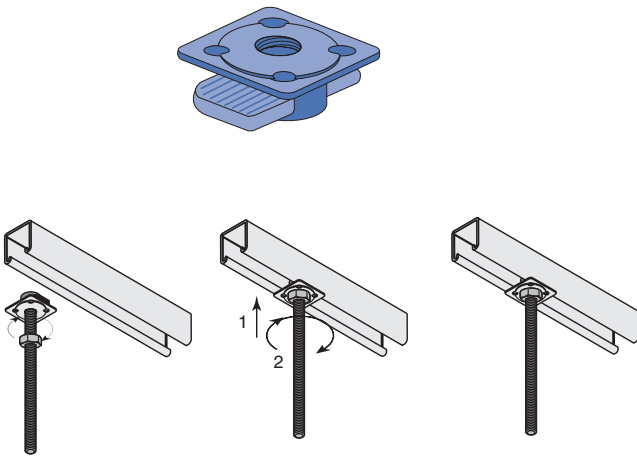

See Page 70

MUSTANG UNIVERSAL ONE-PIECE PIPE, CONDUIT AND TUBING CLAMP

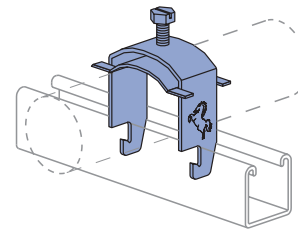


Size Range: 1/4" thru 4"

See Page 105



1⁵/₈" CHANNEL

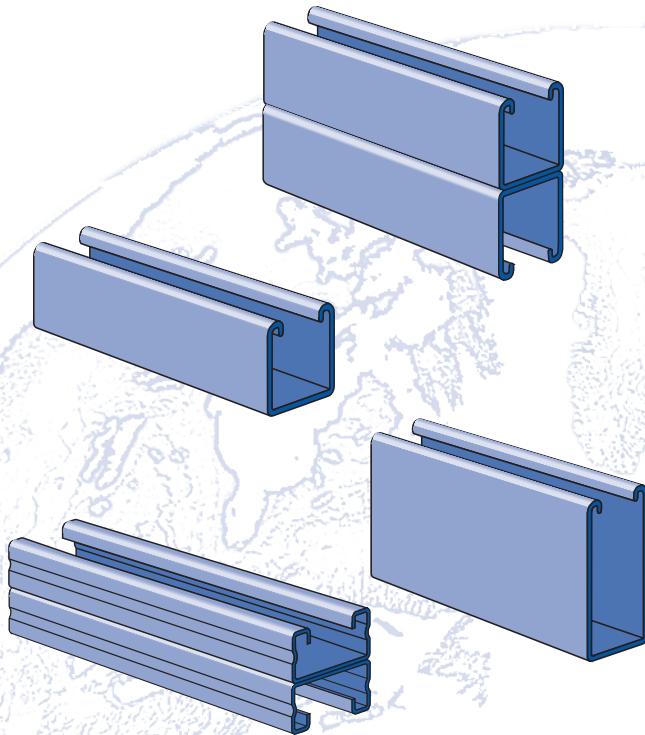

Channel Selection Chart	22
P1000 (12 Gauge)	23
P1100 (14 Gauge)	24-29
P2000 (16 Gauge)	32
P3000 (12 Gauge)	33-35
P3300 (12 Gauge)	36-38
P4000 (16 Gauge)	42-44
P4100 (14 Gauge)	45-47
P5000 (12 Gauge)	48-50
P5500 (12 Gauge)	51-53
Closure Strips	54
End Caps and Frame Caps	55
Lateral Bracing Load Reduction Chart & Bearing Loads.....	56

MATERIAL

Unistrut channels are accurately and carefully cold formed to size from low-carbon strip steel.

All spot-welded combination members, except P1001T, are welded 3" (76 mm) maximum on center.

STEEL: PLAIN

12 Ga. (2.7 mm), 14 Ga. (1.9 mm) and 16 Ga. (1.5 mm) ASTM A1011 SS GR 33.

STEEL: PRE-GALVANIZED

12 Ga. (2.7 mm), 14 Ga. (1.9 mm) and 16 Ga. (1.5mm) ASTM A653 GR 33.

For other materials, see Special Metals or Fiberglass sections.

FINISHES

All channels are available in:

- Perma Green III (GR).
- Pre-galvanized (PG), conforming to ASTM A653 G90.
- Hot-dipped galvanized (HG), conforming to ASTM A123.
- Plain (PL).

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in millimeters and rounded to one decimal place.

STANDARD LENGTHS

Standard lengths are 10 feet (3.05m) and 20 feet (6.10m). Tolerances are +¹/₈" (3 mm) to +¹/₂" (13 mm) to allow for cutting. Special lengths are available for a small cutting charge with a tolerance of ±¹/₈" (3 mm).

CURVED CHANNEL

Contact your local Unistrut Service Center or Unistrut Corporation for more information.


LOAD DATA

All beam and column load data pertains to carbon steel and stainless steel channels. Load tables and charts are constructed to be in accordance with the SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS 2001 EDITION published by the AMERICAN IRON AND STEEL INSTITUTE USING ASD METHOD.


Type of Load	Safety Factor to Yield Strength	Safety Factor to Ultimate Strength
Beam Loads	1.67	2.0
Column Load	1.80	2.2




P1000 Series (12 ga.)

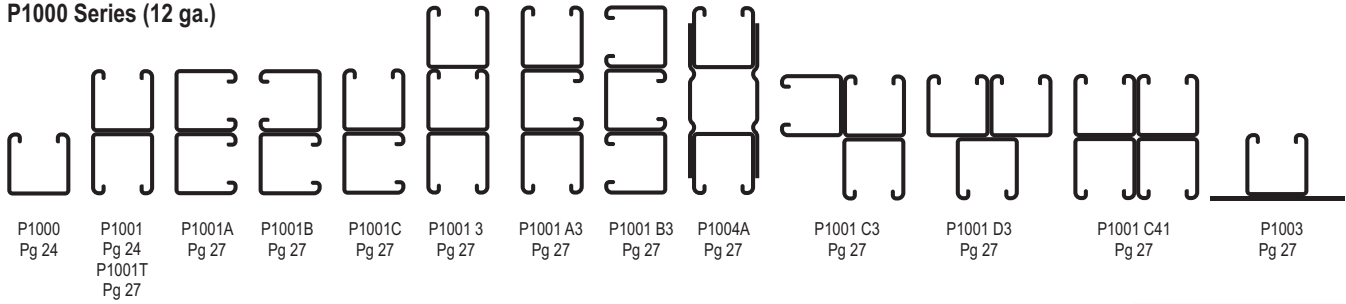


P1100 Series (14 ga.)

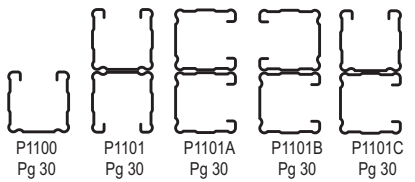


P2000 Series (16 ga.)

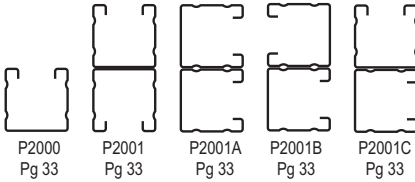


P3000 Series (12 ga.)




P3300 Series (12 ga.)




P4100 Series (14 ga.)

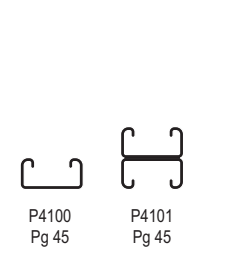


P4000 Series (16 ga.)

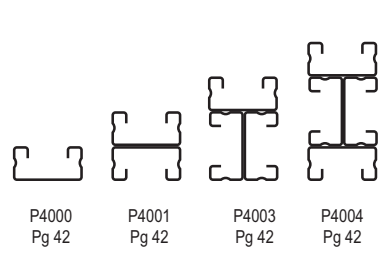

P5000 Series (12 ga.)

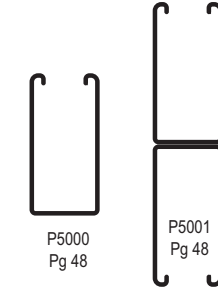


P5500 Series (12 ga.)

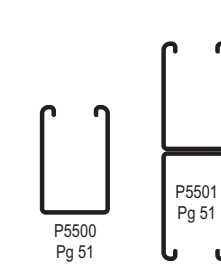


P9000 Series (12 ga.) Telestrut Channel



End Caps and Frame Caps

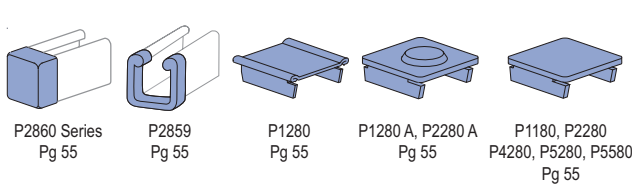


1 5/8" Channel Closure Strips

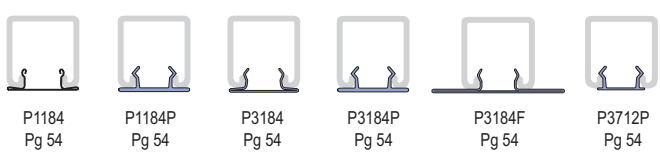

Alternate Framing Systems


A1000 Series (14 gauge) – 1 1/4" Channel

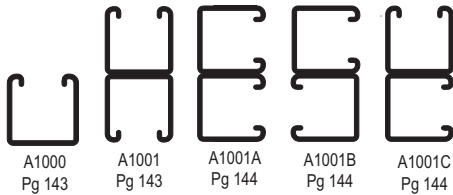


A3300 Series (14 gauge) 1 1/4" Channel




A4000 Series (19 gauge) 1 1/4" Channel

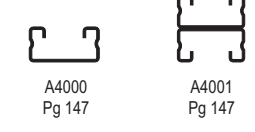


A5000 Series (14 gauge) 1 1/4" Channel

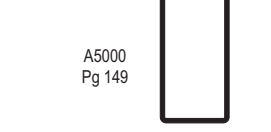








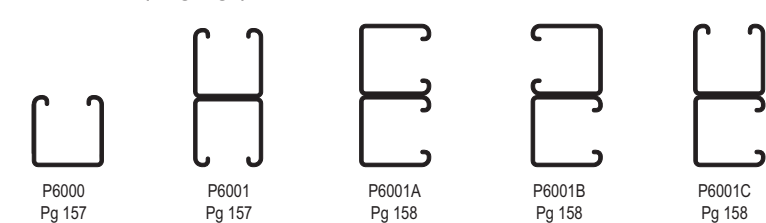
P6000 Series (19 gauge) – 1 3/16" Channel

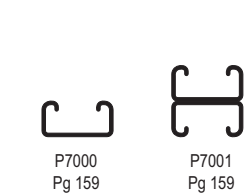

P7000 Series (19 gauge) 1 3/16" Channel



CHANNEL SELECTION CHART

Channel	Channel Dimensions		Material & Thickness			Hole Pattern Styles					
			Steel	Stainless Steel	Alum.						
	Width	Height				HS	T	KO	SL	DS	H3
	In (mm)	In (mm)	gauge	gauge	In (mm)	Steel Only					
P1000	1½ (41)	1½ (41)	12 ga	12 ga	0.109 (2.8)	■	■	■	■	■	■
P1100	1½ (41)	1½ (41)	14 ga	14 ga	—	■	■	■	■	—	—
P2000	1½ (41)	1½ (41)	16 ga	—	—	■	■	■	■	—	—
P3000	1½ (41)	1¾ (35)	12 ga	—	—	■	■	■	■	—	—
P3300	1½ (41)	7⁄8 (22)	12 ga	12 ga	—	■	■	—	■	—	—
P4000	1½ (41)	1⅜ (21)	16 ga	16 ga	0.078 (2.0)	■	■	—	■	—	—
P4100	1½ (41)	1⅜ (21)	14 ga	—	—	■	■	—	■	—	—
P5000	1½ (41)	3¼ (83)	12 ga	12 ga	—	■	■	■	■	—	—
P5500	1½ (41)	2⅞ (62)	12 ga	—	0.109 (2.8)	■	■	■	■	—	—

CHANNELS & COMBINATIONS IN DESCENDING ORDER OF STRENGTH




Channel	Area In ² (cm ²)	Weight lbs/ft (kg/m)	I In ⁴ (cm ⁴)	s In ³ (cm ³)	Allow. Moment In-lbs (N*m)
P5001	1.793 11.57	6.10 9.1	6.227 259.2	1.916 31.4	48,180 5,440
P1004A	1.965 12.68	6.68 9.9	4.068 169.3	1.669 27.4	41,980 4,740
P5501	1.452 9.37	4.94 7.3	2.805 116.8	1.151 18.9	28,940 3,270
P1001C41	2.221 14.33	7.55 11.2	1.856 77.2	1.142 18.7	28,720 3,250
P5000	0.897 5.78	3.05 4.5	1.098 45.7	0.627 10.3	15,770 1,780
P1001	1.111 7.16	3.78 5.6	0.928 38.6	0.571 9.4	14,360 1,620
P1101	0.835 5.39	2.84 4.2	0.733 30.5	0.451 7.4	11,340 1,280
P3001	1.000 6.45	3.40 5.1	0.591 24.6	0.430 7.0	10,810 1,220
P5500	0.726 4.68	2.47 3.7	0.522 21.7	0.390 6.4	9,820 1,110
P2001	0.684 4.41	2.32 3.5	0.618 25.7	0.381 6.2	9,570 1,080
P9200	0.489 3.16	2.23 3.3	0.279 11.6	0.297 4.9	7,480 850
A5000	0.492 3.17	1.67 2.5	0.358 14.9	0.265 4.3	6,670 750
A1001	0.609 3.93	2.07 3.1	0.302 12.6	0.242 4.0	6,070 690
P9000	0.387 2.50	1.88 2.8	0.166 6.9	0.205 3.4	5,150 580
P1000	0.555 3.58	1.89 2.8	0.185 7.7	0.202 3.3	5,070 570
P3301	0.790 5.10	2.69 4.0	0.176 7.3	0.201 3.3	5,060 570

Combinations not shown in catalog are available on special order. Consult factory for more details.

Channel	Area In ² (cm ²)	Weight lbs/ft (kg/m)	I In ⁴ (cm ⁴)	s In ³ (cm ³)	Allow. Moment In-lbs (N*m)
P1100	0.418 2.69	1.42 2.1	0.145 6.0	0.162 2.6	4,060 460
P3000	0.500 3.23	1.70 2.5	0.120 5.0	0.153 2.5	3,850 430
P4101	0.579 3.74	1.97 2.9	0.117 4.9	0.143 2.4	3,610 410
P2000	0.342 2.21	1.16 1.7	0.125 5.2	0.140 2.3	3,520 400
P4001	0.478 3.14	1.66 2.5	0.104 4.3	0.128 2.1	3,210 360
A3301	0.459 2.96	1.56 2.3	0.077 3.2	0.103 1.7	2,590 290
A1000	0.305 1.96	1.04 1.5	0.061 2.5	0.086 1.4	2,170 250
P3300	0.395 2.55	1.34 2.0	0.037 1.5	0.072 1.2	1,800 200
A4001	0.264 1.70	0.90 1.3	0.037 1.5	0.058 1.0	1,470 170
P6001	0.213 1.38	0.73 1.1	0.045 1.9	0.055 0.9	1,400 160
P4100	0.290 1.87	0.98 1.5	0.026 1.1	0.054 0.9	1,360 150
P4000	0.244 1.57	0.83 1.2	0.023 0.9	0.049 0.8	1,230 140
A3300	0.230 1.48	0.78 1.2	0.017 0.7	0.038 0.6	950 110
A4000	0.132 0.85	0.45 0.7	0.008 0.3	0.022 0.4	560 60
P6000	0.107 0.69	0.36 0.5	0.009 0.4	0.020 0.3	510 60
P7001	0.148 0.96	0.50 0.8	0.007 0.3	0.018 0.3	460 50
P7000	0.074 0.48	0.25 0.4	0.002 0.1	0.007 0.1	170 20






P1000®

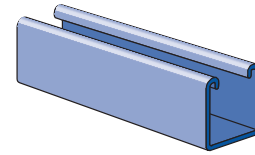


Wt/100 Ft: 189 Lbs (281 kg/100 m)
 Allowable Moment 5,070 In-Lbs (570 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001

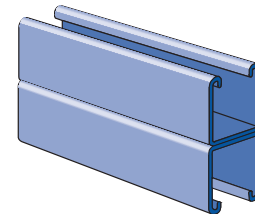


Wt/100 Ft: 378 Lbs (562 kg/100 m)
 Allowable Moment 14,360 In-Lbs (1,620 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1000 DS

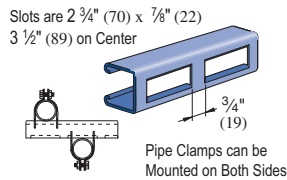


Wt/100 Ft: 173 Lbs (257 kg/100 m)

P1000 H3




Wt/100 Ft: 175 Lbs (260 kg/100 m)

P1000 HS




Wt/100 Ft: 185 Lbs (275 kg/100 m)

P1000 KO




Wt/100 Ft: 190 Lbs (283 kg/100 m)

P1000 SL




Wt/100 Ft: 185 Lbs (275 kg/100 m)

P1000 T

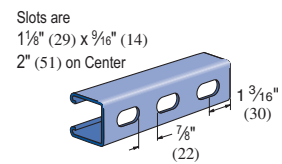

Wt/100 Ft: 185 Lbs (275 kg/100 m)


CHANNEL NUTS (REFER TO HARDWARE SECTION FOR DETAILS)



P1006-0832
P1006-1024
P1006-1420
P1007
P1008
P1009
P1010



P1008T
P1006T1420
P1010T



P1024
P1012S
P1023S



P1012
P1023
P1024S



P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3010



P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG; Standard Lengths: 10' & 20'

1 5/8" Channel
 Telesnut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/4" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P1000 - BEAM LOADING

Span In	Max. Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,690	0.06	1,690	1,690	1,690
36	1,130	0.13	1,130	1,130	900
48	850	0.22	850	760	500
60	680	0.35	650	480	320
72	560	0.50	450	340	220
84	480	0.68	330	250	160
96	420	0.89	250	190	130
108	380	1.14	200	150	100
120	340	1.40	160	120	80
144	280	2.00	110	80	60
168	240	2.72	80	60	40
192	210	3.55	60	50	NR
216	190	4.58	50	40	NR
240	170	5.62	40	NR	NR

P1001 - BEAM LOADING

Span In	Max. Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	3,500*	0.02	3,500*	3,500*	3,500*
36	3,190	0.07	3,190	3,190	3,190
48	2,390	0.13	2,390	2,390	2,390
60	1,910	0.20	1,910	1,910	1,620
72	1,600	0.28	1,600	1,600	1,130
84	1,370	0.39	1,370	1,240	830
96	1,200	0.51	1,200	950	630
108	1,060	0.64	1,000	750	500
120	960	0.79	810	610	410
144	800	1.14	560	420	280
168	680	1.53	410	310	210
192	600	2.02	320	240	160
216	530	2.54	250	190	130
240	480	3.16	200	150	100

P1000 - COLUMN LOADING

Unbraced Height In	Max. Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	3,550	10,740	9,890	8,770	7,740
36	3,190	8,910	7,740	6,390	5,310
48	2,770	7,260	6,010	4,690	3,800
60	2,380	5,910	4,690	3,630	2,960
72	2,080	4,840	3,800	2,960	2,400
84	1,860	4,040	3,200	2,480	1,980
96	1,670	3,480	2,750	2,110	1,660
108	1,510	3,050	2,400	1,810	**
120	1,380	2,700	2,110	**	**
144	1,150	2,180	1,660	**	**

P1001 - COLUMN LOADING

Unbraced Height In	Max. Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	6,430	24,280	23,610	22,700	21,820
36	6,290	22,810	21,820	20,650	19,670
48	6,160	21,410	20,300	18,670	16,160
60	6,000	20,210	18,670	15,520	12,390
72	5,620	18,970	16,160	12,390	8,950
84	5,170	16,950	13,630	9,470	6,580
96	4,690	14,890	11,190	7,250	5,040
108	4,170	12,850	8,950	5,730	3,980
120	3,690	10,900	7,250	4,640	**
144	2,930	7,630	5,040	**	**

P1000/P1001 - ELEMENTS OF SECTION

Parameter	P1000	P1001
Area of Section	0.555 In ²	1.111 In ²
Axis 1-1		
Moment of Inertia (I)	0.185 In ⁴	0.928 In ⁴
Section Modulus (S)	0.202 In ³	0.571 In ³
Radius of Gyration (r)	0.577 In	0.914 In
Axis 2-2		
Moment of Inertia (I)	0.236 In ⁴	0.471 In ⁴
Section Modulus (S)	0.290 In ³	0.580 In ³
Radius of Gyration (r)	0.651 In	0.651 In

Notes:

* Load limited by spot weld shear.

** KL/r > 200

NR = Not Recommended.

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"DS" Series	70%	"T" Series	85%
"KO" Series	95%	"H3" Series	90%
"SL" Series	85%	"HS" Series	90%



P1000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	7.6	1	7.6	7.6	7.6
750	6.1	2	6.1	6.1	5.9
1,000	4.6	4	4.6	4.6	3.3
1,250	3.6	6	3.6	3.2	2.1
1,500	3.1	9	3.0	2.2	1.5
1,750	2.6	12	2.2	1.6	1.1
2,000	2.3	15	1.6	1.2	0.8
2,500	1.8	24	1.1	0.8	0.5
3,000	1.5	34	0.8	0.5	0.4
3,500	1.3	46	0.5	0.4	0.3
4,000	1.2	62	0.4	0.3	0.2
4,500	1.0	78	0.3	0.3	0.2
5,000	0.9	97	0.3	0.2	NR
6,000	0.8	136	0.2	NR	NR

P1001 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	15.6 *	1	15.6 *	15.6 *	15.6 *
750	15.6 *	1	15.6 *	15.6 *	15.6 *
1,000	13.0	2	13.0	13.0	13.0
1,250	10.4	3	10.4	10.4	10.4
1,500	8.7	5	8.7	8.7	7.4
1,750	7.4	7	7.4	7.4	5.5
2,000	6.5	9	6.5	6.3	4.2
2,500	5.2	13	5.2	4.0	2.7
3,000	4.3	19	3.7	2.8	1.9
3,500	3.7	26	2.8	2.0	1.4
4,000	3.2	34	2.1	1.6	1.1
4,500	2.9	44	1.6	1.2	0.8
5,000	2.6	53	1.3	1.0	0.7
6,000	2.2	78	0.9	0.7	0.4

P1000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	15.8	48.0	44.3	39.4	34.8
750	15.2	44.0	39.4	33.8	28.9
1,000	13.7	37.5	32.0	26.1	21.3
1,250	12.1	31.6	26.1	20.3	16.5
1,500	10.7	26.7	21.3	16.5	13.4
1,750	9.6	22.7	17.8	13.8	11.3
2,000	8.7	19.3	15.3	11.9	9.6
2,250	7.9	16.9	13.4	10.4	8.2
2,500	7.2	15.0	11.9	9.1	**
2,750	6.7	13.5	10.6	8.1	**

P1001 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	28.6	108.2	105.3	101.3	97.4
750	28.3	105.0	101.3	96.5	92.2
1,000	27.8	99.6	95.0	89.7	83.9
1,250	27.3	94.7	89.7	81.7	70.1
1,500	26.8	90.3	83.9	70.1	56.4
1,750	25.4	86.7	74.8	58.6	43.5
2,000	23.9	79.4	65.5	47.7	33.3
2,250	22.2	71.9	56.4	37.9	26.3
2,500	20.4	64.4	47.7	30.7	21.3
2,750	18.5	56.9	39.6	25.4	17.6

P1000/P1001 - ELEMENTS OF SECTION (METRIC)

Parameter	P1000	P1001
Area of Section	3.58 cm ²	7.16 cm ²
Axis 1-1		
Moment of Inertia (I)	7.68 cm ⁴	38.62 cm ⁴
Section Modulus (S)	3.30 cm ³	9.36 cm ³
Radius of Gyration (r)	1.46 cm	2.32 cm
Axis 2-2		
Moment of Inertia (I)	9.80 cm ⁴	19.60 cm ⁴
Section Modulus (S)	4.75 cm ³	9.50 cm ³
Radius of Gyration (r)	1.65 cm	1.65 cm

Notes:

* Load limited by spot weld shear.

** KL/r > 200


NR = Not Recommended.

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"DS" Series	70%	"T" Series	85%
"KO" Series	95%	"H3" Series	90%
"SL" Series	85%	"HS" Series	90%


1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/8" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P1001 T

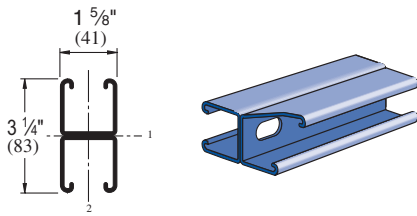


Wt/100 Ft: 321 Lbs (478 kg/100 m)
 Allowable Moment 12,200 In-Lbs (1,378 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001 A

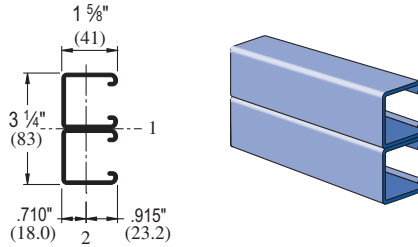


Wt/100 Ft: 378 Lbs (562 kg/100 m)
 Allowable Moment 18,640 In-Lbs (2,110 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001 B

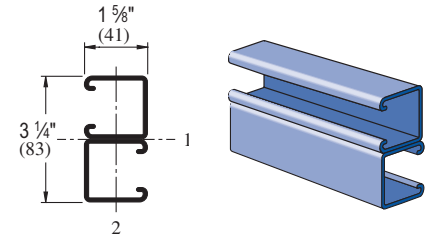


Wt/100 Ft: 378 Lbs (562 kg/100 m)
 Allowable Moment 18,640 In-Lbs (2,110 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001 C

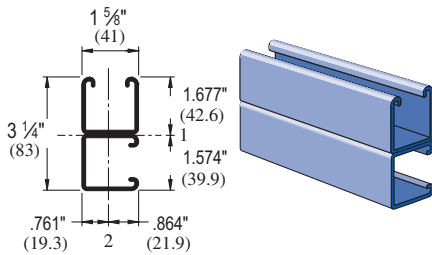


Wt/100 Ft: 378 Lbs (562 kg/100 m)
 Allowable Moment 15,950 In-Lbs (1,800 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001 3

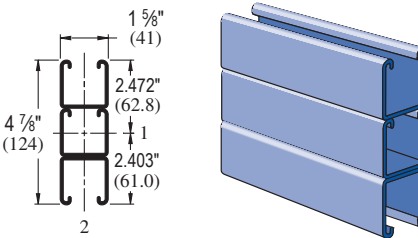


Wt/100 Ft: 566 Lbs (843 kg/100 m)
 Allowable Moment 31,840 In-Lbs (3,600 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001 A3

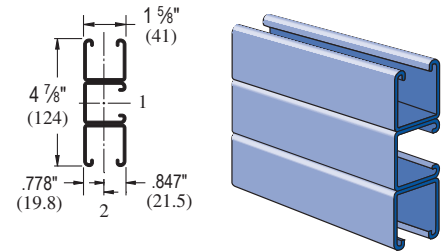


Wt/100 Ft: 566 Lbs (843 kg/100 m)
 Allowable Moment 32,770 In-Lbs (3,700 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001 B3

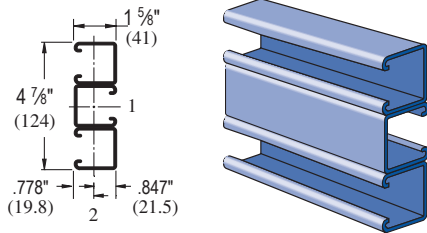


Wt/100 Ft: 566 Lbs (843 kg/100 m)
 Allowable Moment 37,550 In-Lbs (4,240 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001 D3

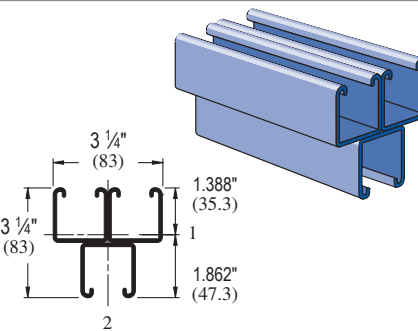


Wt/100 Ft: 566 Lbs (843 kg/100 m)
 Allowable Moment 17,550 In-Lbs (1,980 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1003

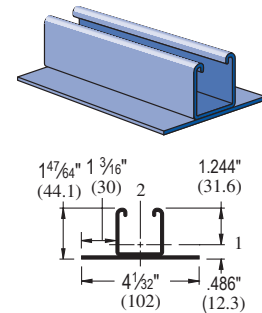


Wt/100 Ft: 333 Lbs (495 kg/100 m)
 Allowable Moment 6,240 In-Lbs (700 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001 C41

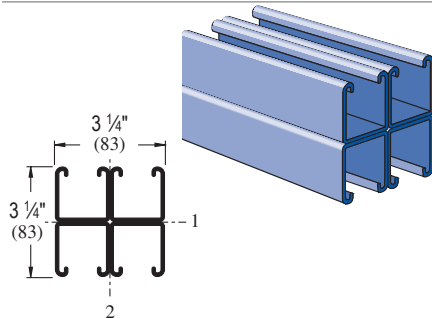


Wt/100 Ft: 755 Lbs (1,124 kg/100 m)
 Allowable Moment 28,720 In-Lbs (3,250 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001 C3

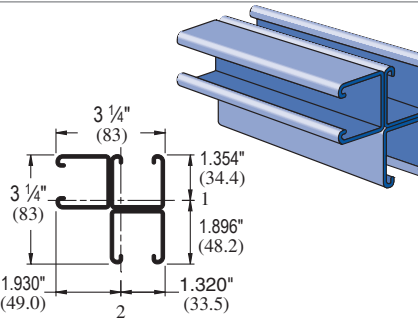

Wt/100 Ft: 566 Lbs (843 kg/100 m)
 Allowable Moment 18,680 In-Lbs (2,110 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P1004 A

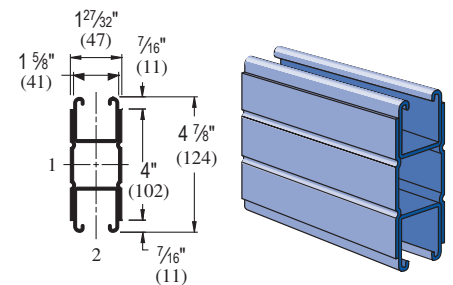

Wt/100 Ft: 668 Lbs (994 kg/100 m)
 Allowable Moment 41,970 In-Lbs (4,740 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

Channel Finishes: PL, GR, HG, PG; Standard Lengths: 10' & 20'



P1001 C41 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	7,040*	0.02	7,040*	7,040*	7,040*
36	6,380	0.07	6,380	6,380	6,380
48	4,790	0.13	4,790	4,790	4,790
60	3,830	0.20	3,830	3,830	3,240
72	3,190	0.28	3,190	3,190	2,250
84	2,740	0.39	2,740	2,480	1,660
96	2,390	0.50	2,390	1,900	1,270
108	2,130	0.64	2,000	1,500	1,000
120	1,910	0.78	1,620	1,220	810
144	1,600	1.14	1,130	840	560
168	1,370	1.55	830	620	410
192	1,200	2.02	630	480	320
216	1,060	2.54	500	380	250
240	960	3.16	410	300	200

P1004 A - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	9,100*	0.01	9,100*	9,100*	9,100*
36	9,100*	0.05	9,100*	9,100*	9,100*
48	7,000	0.08	7,000	7,000	7,000
60	5,600	0.13	5,600	5,600	5,600
72	4,660	0.19	4,660	4,660	4,660
84	4,000	0.26	4,000	4,000	3,630
96	3,500	0.34	3,500	3,500	2,780
108	3,110	0.43	3,110	3,110	2,200
120	2,800	0.52	2,800	2,670	1,780
144	2,330	0.75	2,330	1,850	1,230
168	2,000	1.03	1,810	1,360	910
192	1,750	1.34	1,390	1,040	690
216	1,550	1.69	1,100	820	550
240	1,400	2.10	890	670	440

P1001 C41 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	12,690	46,920	44,980	42,360	39,890
36	12,250	42,680	39,890	36,660	34,050
48	11,820	38,740	35,720	32,640	30,430
60	11,470	35,500	32,640	29,980	28,220
72	11,180	32,970	30,430	28,220	26,820
84	10,900	31,040	28,840	27,010	24,870
96	10,580	29,570	27,680	26,170	19,840
108	10,310	28,440	26,820	22,310	15,670
120	10,070	27,560	26,170	18,280	12,700
144	8,740	26,320	19,840	12,700	8,820
168	7,360	21,890	14,570	9,330	**

P1004 A - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	11,420	36,800	33,890	30,440	27,600
36	10,600	30,840	27,600	24,400	22,160
48	9,860	26,400	23,560	21,060	19,470
60	9,160	23,370	21,060	19,160	18,020
72	8,610	21,310	19,470	18,020	17,140
84	8,170	19,890	18,410	17,260	15,240
96	7,790	18,890	17,670	16,760	11,670
108	7,460	18,160	17,140	13,280	9,220
120	7,150	17,590	16,760	10,750	7,470
144	5,660	16,840	11,670	7,470	**
168	4,520	12,990	8,570	**	**

P1001 C41/ P1004 A - ELEMENTS OF SECTION

Parameter	P1001 C41	P1004 A
Area of Section	2.221 In ²	1.965 In ²
Axis 1-1		
Moment of Inertia (I)	1.856 In ⁴	4.068 In ⁴
Section Modulus (S)	1.142 In ³	1.669 In ³
Radius of Gyration (r)	0.914 In	1.439 In
Axis 2-2		
Moment of Inertia (I)	2.408 In ⁴	1.092 In ⁴
Section Modulus (S)	1.482 In ³	1.190 In ³
Radius of Gyration (r)	1.041 In	0.745 In

*Load limited by spot weld shear.

** $K L / r > 200$

Notes:

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.

1 5/8" Channel
Telestrut System
Nuts & Hardware
General Fittings
Pipe/Conduit Supports
Electrical Fittings
Concrete Inserts
1 1/4" Framing System
1 3/16" Framing System
Fiberglass System
Special Metals
PrimeAngle System
Product Index

P1001 C41 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	31.3 *	1	31.3 *	31.3 *	31.3 *
750	31.3 *	1	31.3 *	31.3 *	31.3 *
1,000	26.0	2	26.0	26.0	26.0
1,250	20.8	3	20.8	20.8	20.8
1,500	17.3	5	17.3	17.3	14.9
1,750	14.8	7	14.8	14.8	10.9
2,000	13.0	9	13.0	12.6	8.4
2,500	10.4	13	10.4	8.1	5.4
3,000	8.7	19	7.4	5.6	3.7
3,500	7.4	26	5.5	4.1	2.8
4,000	6.5	34	4.2	3.2	2.1
4,500	5.8	44	3.3	2.5	1.6
5,000	5.2	54	2.7	2.0	1.3
6,000	4.3	77	1.9	1.4	0.9

P1004 A - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kgN	Span/360 kN
600	40.5 *	1	40.5 *	40.5 *	40.5 *
750	40.5 *	1	40.5 *	40.5 *	40.5 *
1,000	37.9	2	37.9	37.9	37.9
1,250	30.3	3	30.3	30.3	30.3
1,500	25.3	4	25.3	25.3	25.3
1,750	21.7	6	21.7	21.7	21.7
2,000	18.9	9	18.9	18.9	18.4
2,500	15.2	13	15.2	15.2	11.7
3,000	12.6	18	12.6	12.2	8.2
3,500	10.9	23	10.9	9.0	6.0
4,000	9.5	29	9.2	6.9	4.6
4,500	8.5	36	7.2	5.4	3.6
5,000	7.6	52	5.9	4.4	2.9
6,000	6.3	77	4.1	3.1	2.0

P1001 C41 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	56.5	209.3	200.8	189.3	178.4
750	55.6	200.1	189.3	175.8	164.1
1,000	53.9	184.7	171.7	157.3	146.1
1,250	52.4	170.7	157.3	143.8	134.1
1,500	51.1	158.9	146.1	134.1	126.1
1,750	50.0	149.3	137.6	127.3	120.7
2,000	49.2	141.5	131.1	122.3	116.8
2,250	47.9	135.4	126.1	118.6	101.9
2,500	46.8	130.4	122.3	114.5	83.9
2,750	45.9	126.4	119.2	98.8	69.4

P1004 A - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	50.9	164.6	151.8	136.5	123.8
750	49.1	150.8	136.5	121.1	109.5
1,000	46.3	130.9	116.9	103.4	94.3
1,250	43.5	115.8	103.4	92.6	85.8
1,500	40.9	104.8	94.3	85.8	80.6
1,750	38.9	96.8	88.1	81.3	77.0
2,000	37.1	91.0	83.7	78.1	74.8
2,250	35.7	86.6	80.6	75.8	60.9
2,500	34.3	83.3	78.1	71.1	49.4
2,750	33.1	80.7	76.2	58.8	40.8

P1001 C41/ P1004 A - ELEMENTS OF SECTION (METRIC)

Parameter	P1001 C41	P1004 A
Area of Section	14.33 cm ²	12.68 cm ²
Axis 1-1		
Moment of Inertia (I)	77.24 cm ⁴	169.33 cm ⁴
Section Modulus (S)	18.71 cm ³	27.35 cm ³
Radius of Gyration (r)	2.32 cm	3.66 cm
Axis 2-2		
Moment of Inertia (I)	100.24 cm ⁴	45.44 cm ⁴
Section Modulus (S)	24.29 cm ³	19.50 cm ³
Radius of Gyration (r)	2.64 cm	1.89 cm

*Load limited by spot weld shear.


** $K_L/r > 200$

Notes:

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.




P1100

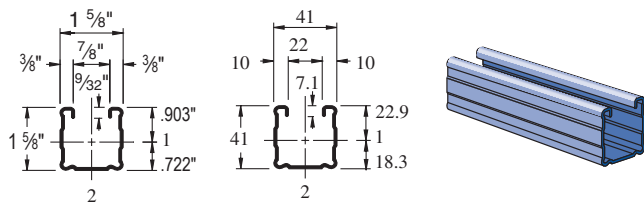


Wt/100 Ft: 142 Lbs (211 kg/100 m)
 Allowable Moment 4,060 In-Lbs (460 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

P1101

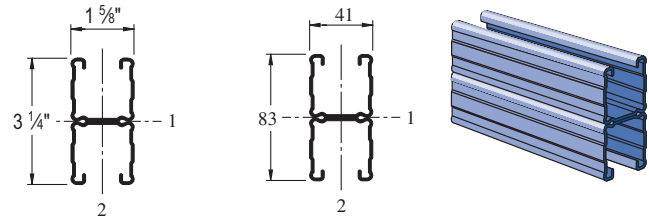


Wt/100 Ft: 284 Lbs (423 kg/100 m)
 Allowable Moment 11,340 In-Lbs (1,280 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

P1101 A

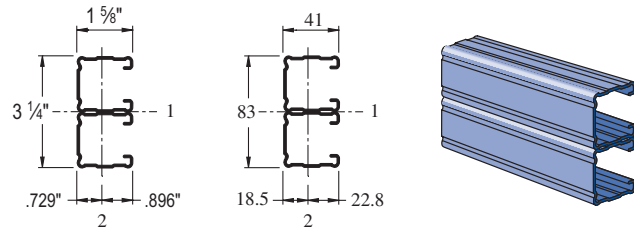


Wt/100 Ft: 284 Lbs (423 kg/100 m)
 Allowable Moment 14,000 In-Lbs (1,580 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

P1101 B

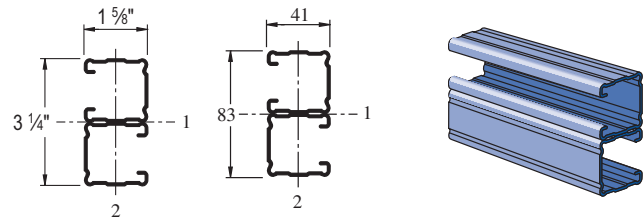


Wt/100 Ft: 284 Lbs (423 kg/100 m)
 Allowable Moment 14,000 In-Lbs (1,580 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

P1101 C

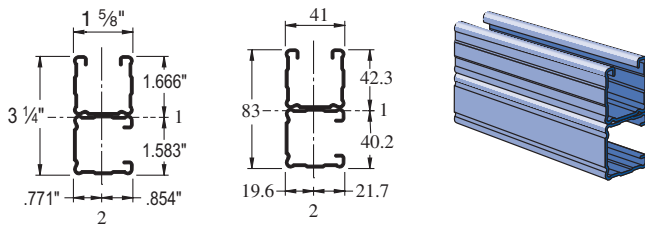


Wt/100 Ft: 284 Lbs (423 kg/100 m)
 Allowable Moment 12,330 In-Lbs (1,390 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

P1100 HS

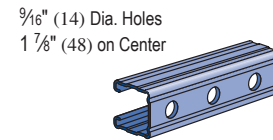


Wt/100 Ft: 136 Lbs (202 kg/100 m)

P1100 KO

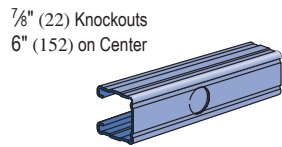


Wt/100 Ft: 140 Lbs (208 kg/100 m)

P1100 SL

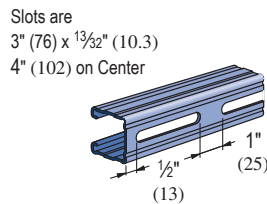



Wt/100 Ft: 136 Lbs (202 kg/100 m)

P1100 T

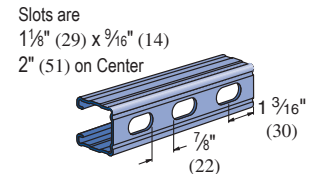

Wt/100 Ft: 136 Lbs (202 kg/100 m)

CHANNEL NUTS (REFER TO HARDWARE SECTION FOR DETAILS)



Channel Finishes: PL, GR, HG, PG; Standard Lengths: 10' & 20'

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P1100 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,350	0.06	1,350	1,350	1,350
36	900	0.13	900	900	700
48	680	0.23	680	590	400
60	540	0.36	510	380	250
72	450	0.51	350	260	180
84	390	0.70	260	190	130
96	340	0.92	200	150	100
108	300	1.15	160	120	80
120	270	1.42	130	90	60
144	230	2.09	90	70	40
168	190	2.75	60	50	30
192	170	3.67	50	40	NR
216	150	4.61	40	30	NR
240	140	5.90	30	NR	NR

P1101 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	2,180*	0.02	2,180*	2,180*	2,180*
36	2,180*	0.06	2,180*	2,180*	2,180*
48	1,890	0.13	1,890	1,890	1,890
60	1,510	0.20	1,510	1,510	1,280
72	1,260	0.28	1,260	1,260	890
84	1,080	0.39	1,080	980	650
96	950	0.51	950	750	500
108	840	0.64	790	590	400
120	760	0.79	640	480	320
144	630	1.13	440	330	220
168	540	1.54	330	250	160
192	470	2.00	250	190	130
216	420	2.55	200	150	100
240	380	3.16	160	120	80

P1100 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	2,800	8,040	7,330	6,360	5,430
36	2,410	6,480	5,430	4,190	3,210
48	1,940	4,990	3,830	2,760	2,160
60	1,550	3,740	2,760	2,050	1,640
72	1,290	2,860	2,160	1,640	1,320
84	1,100	2,310	1,780	1,370	1,110
96	950	1,950	1,520	1,180	950
108	840	1,690	1,320	1,030	**
120	760	1,490	1,180	**	**
144	630	1,210	950	**	**

P1101 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	5,010	18,250	17,700	16,880	16,030
36	4,860	16,990	16,030	14,770	13,620
48	4,700	15,610	14,380	12,930	11,750
60	4,480	14,280	12,930	11,490	9,290
72	4,210	13,100	11,750	9,290	6,700
84	3,880	12,090	10,220	7,090	4,930
96	3,480	11,170	8,390	5,430	3,770
108	3,060	9,640	6,700	4,290	2,980
120	2,680	8,170	5,430	3,480	**
144	2,090	5,710	3,770	**	**

P1100/P1101 - ELEMENTS OF SECTION

Parameter	P1100		P1101	
Area of Section	0.418	In ²	0.835	In ²
Axis 1-1				
Moment of Inertia (I)	0.145	In ⁴	0.733	In ⁴
Section Modulus (S)	0.162	In ³	0.451	In ³
Radius of Gyration (r)	0.589	In	0.937	In
Axis 2-2				
Moment of Inertia (I)	0.176	In ⁴	0.353	In ⁴
Section Modulus (S)	0.217	In ³	0.434	In ³
Radius of Gyration (r)	0.650	In	0.650	In

Notes:

* Load limited by spot weld shear.

** $KL/r > 200$

NR = Not Recommended.

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%



P1100 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	6.1	1	6.1	6.1	6.1
750	4.9	2	4.9	4.9	4.7
1,000	3.7	4	3.7	3.7	2.6
1,250	2.9	6	2.9	2.5	1.7
1,500	2.4	9	2.3	1.7	1.2
1,750	2.1	12	1.7	1.3	0.8
2,000	1.8	15	1.3	1.0	0.7
2,500	1.5	24	0.8	0.6	0.4
3,000	1.2	36	0.6	0.4	0.3
3,500	1.1	49	0.4	0.3	0.2
4,000	0.9	64	0.3	0.3	0.2
4,500	0.8	77	0.3	0.2	0.1
5,000	0.8	100	0.2	0.2	NR
6,000	0.6	143	0.1	NR	NR

P1101 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	9.7 *	0	9.7 *	9.7 *	9.7 *
750	9.7 *	1	9.7 *	9.7 *	9.7 *
1,000	9.7 *	2	9.7 *	9.7 *	9.7 *
1,250	8.2	3	8.2	8.2	8.2
1,500	6.9	5	6.9	6.9	5.9
1,750	5.9	7	5.9	5.9	4.3
2,000	5.1	9	5.1	5.0	3.3
2,500	4.1	13	4.1	3.2	2.1
3,000	3.4	19	2.9	2.2	1.5
3,500	2.9	26	2.2	1.6	1.1
4,000	2.6	35	1.6	1.2	0.8
4,500	2.3	43	1.3	1.0	0.7
5,000	2.0	54	1.1	0.8	0.5
6,000	1.7	77	0.8	0.5	0.4

P1100 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	12.5	35.9	32.9	28.6	24.5
750	11.8	32.6	28.6	23.5	19.0
1,000	10.1	26.9	22.0	16.4	12.5
1,250	8.5	21.6	16.4	11.8	9.3
1,500	7.0	17.0	12.5	9.3	7.4
1,750	6.0	13.5	10.1	7.7	6.2
2,000	5.2	11.2	8.6	6.5	5.3
2,250	4.6	9.6	7.4	5.7	4.7
2,500	4.1	8.4	6.5	5.1	**
2,750	3.7	7.5	5.9	4.5	**

P1101 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	22.3	81.4	79.0	75.4	71.7
750	22.0	78.7	75.4	70.7	66.1
1,000	21.4	73.8	69.2	63.3	58.0
1,250	20.8	68.8	63.3	56.8	51.6
1,500	20.0	64.0	58.0	51.6	42.3
1,750	19.0	59.5	53.5	44.0	32.6
2,000	18.0	55.6	49.2	35.7	25.0
2,250	16.6	52.3	42.3	28.4	19.7
2,500	15.1	48.3	35.7	23.0	16.0
2,750	13.6	42.7	29.7	19.0	13.2

P1100/P1101 - ELEMENTS OF SECTION (METRIC)

Parameter	P1100		P1101	
Area of Section	2.69	cm ²	5.39	cm ²
Axis 1-1				
Moment of Inertia (I)	6.03	cm ⁴	30.51	cm ⁴
Section Modulus (S)	2.65	cm ³	7.39	cm ³
Radius of Gyration (r)	1.50	cm	2.38	cm
Axis 2-2				
Moment of Inertia (I)	7.34	cm ⁴	14.69	cm ⁴
Section Modulus (S)	3.56	cm ³	7.12	cm ³
Radius of Gyration (r)	1.65	cm	1.65	cm

Notes:

* Load limited by spot weld shear.


** $K L_i > 200$

NR = Not Recommended.

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:


"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%

P2000

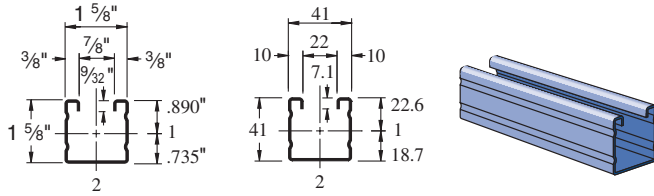


Wt/100 Ft: 116 Lbs (173 kg/100 m)
 Allowable Moment 3,520 In-Lbs (400 N•m)
 16 Gauge Nominal Thickness .060" (1.5mm)

P2001

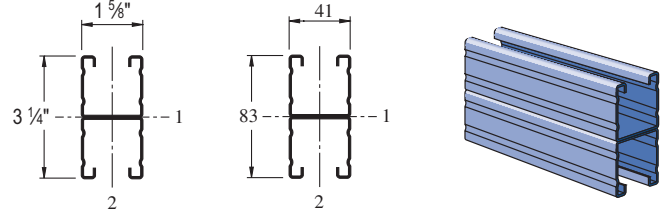


Wt/100 Ft: 232 Lbs (346 kg/100 m)
 Allowable Moment 9,570 In-Lbs (1,080 N•m)
 16 Gauge Nominal Thickness .060" (1.5mm)

P2001 A

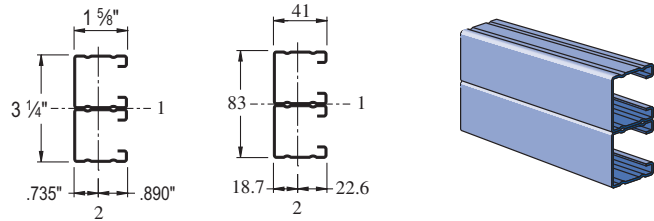


Wt/100 Ft: 232 Lbs (346 kg/100 m)
 Allowable Moment 11,660 In-Lbs (1,320 N•m)
 16 Gauge Nominal Thickness .060" (1.5mm)

P2001 B

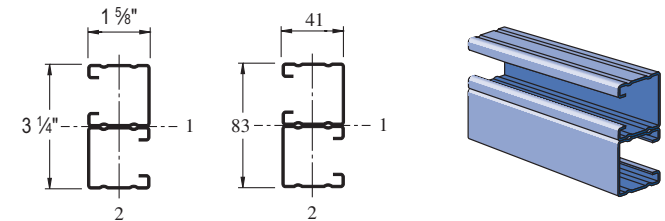


Wt/100 Ft: 232 Lbs (346 kg/100 m)
 Allowable Moment 11,660 In-Lbs (1,320 N•m)
 16 Gauge Nominal Thickness .060" (1.5mm)

P2001 C

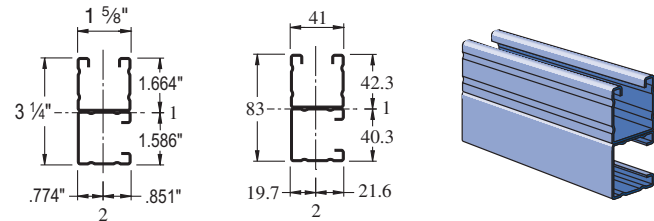

Wt/100 Ft: 232 Lbs (346 kg/100 m)
 Allowable Moment 10,350 In-Lbs (1,170 N•m)
 16 Gauge Nominal Thickness .060" (1.5mm)


P2000 HS



Wt/100 Ft: 113 Lbs (168 kg/100 m)

P2000 KO


7/8" (22) Knockouts
 6" (152) on Center



Wt/100 Ft: 117 Lbs (174 kg/100 m)

P2000 SL


Slots are
 3" (76) x 1 3/32" (10.3)
 4" (102) on Center



Wt/100 Ft: 113 Lbs (168 kg/100 m)


P2000 T

Slots are
 1 1/8" (29) x 9/16" (14)
 2" (51) on Center



Wt/100 Ft: 113 Lbs (168 kg/100 m)

CHANNEL NUTS (REFER TO HARDWARE SECTION FOR DETAILS)



P1006-0832
P1006-1024
P1006-1420
P1007
P1008
P1009
P1010



P1008T
P1006T1420
P1010T



P1024
P1012S
P1023S



P1012
P1023
P1024S



P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3010



P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG; Standard Lengths: 10' & 20'



P2000 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,170	0.06	1,170	1,170	1,170
36	780	0.13	780	780	610
48	590	0.23	590	510	340
60	470	0.36	440	330	220
72	390	0.52	300	230	150
84	340	0.71	220	170	110
96	290	0.91	170	130	90
108	260	1.16	130	100	70
120	230	1.41	110	80	50
144	200	2.12	80	60	40
168	170	2.86	60	40	30
192	150	3.76	40	30	20
216	130	4.64	30	30	NR
240	120	5.88	30	NR	NR

P2001 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,610*	0.02	1,610*	1,610*	1,610*
36	1,610*	0.05	1,610*	1,610*	1,610*
48	1,600	0.13	1,600	1,600	1,600
60	1,280	0.20	1,280	1,280	1,080
72	1,060	0.28	1,060	1,060	750
84	910	0.38	910	830	550
96	800	0.51	800	630	420
108	710	0.64	670	500	330
120	640	0.79	540	410	270
144	530	1.13	380	280	190
168	460	1.56	280	210	140
192	400	2.02	210	160	110
216	350	2.52	170	130	80
240	320	3.16	140	100	70

P2000 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	2,400	6,650	6,080	5,280	4,470
36	2,050	5,380	4,470	3,370	2,500
48	1,600	4,090	3,040	2,100	1,590
60	1,230	2,960	2,100	1,500	1,160
72	970	2,190	1,590	1,160	910
84	790	1,720	1,270	950	760
96	660	1,410	1,060	800	650
108	570	1,200	910	700	**
120	510	1,040	800	620	**
144	420	830	650	**	**

P2001 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	4,200	15,030	14,600	13,940	13,220
36	4,070	14,030	13,220	12,090	10,990
48	3,920	12,850	11,720	10,290	9,040
60	3,700	11,630	10,290	8,760	7,530
72	3,410	10,460	9,040	7,530	5,740
84	3,140	9,410	7,990	6,080	4,220
96	2,890	8,490	7,120	4,650	3,230
108	2,530	7,700	5,740	3,680	2,550
120	2,210	6,950	4,650	2,980	**
144	1,690	4,890	3,230	**	**

P2000/P2001 - ELEMENTS OF SECTION

Parameter	P2000		P2001	
Area of Section	0.342	ln ²	0.684	ln ²
Axis 1-1				
Moment of Inertia (I)	0.125	ln ⁴	0.618	ln ⁴
Section Modulus (S)	0.140	ln ³	0.381	ln ³
Radius of Gyration (r)	0.604	ln	0.951	ln
Axis 2-2				
Moment of Inertia (I)	0.151	ln ⁴	0.302	ln ⁴
Section Modulus (S)	0.186	ln ³	0.372	ln ³
Radius of Gyration (r)	0.665	ln	0.665	ln

Notes:

* Load limited by spot weld shear.

** $K_L/r > 200$

NR = Not Recommended.

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/8" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P2000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	5.3	1	5.3	5.3	5.3
750	4.2	2	4.2	4.2	4.0
1,000	3.2	4	3.2	3.2	2.3
1,250	2.5	6	2.5	2.2	1.4
1,500	2.1	9	2.0	1.5	1.0
1,750	1.8	12	1.5	1.1	0.8
2,000	1.6	16	1.1	0.8	0.6
2,500	1.3	25	0.7	0.5	0.4
3,000	1.1	36	0.5	0.4	0.3
3,500	0.9	47	0.4	0.3	0.2
4,000	0.8	63	0.3	0.2	0.1
4,500	0.7	80	0.2	0.2	0.1
5,000	0.6	96	0.2	0.1	0.1
6,000	0.5	142	0.1	NR	NR

P2001 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	7.2 *	0	7.2 *	7.2 *	7.2 *
750	7.2 *	1	7.2 *	7.2 *	7.2 *
1,000	7.2 *	2	7.2 *	7.2 *	7.2 *
1,250	6.9	3	6.9	6.9	6.9
1,500	5.8	5	5.8	5.8	5.0
1,750	4.9	7	4.9	4.9	3.6
2,000	4.3	9	4.3	4.2	2.8
2,500	3.5	13	3.5	2.7	1.8
3,000	2.9	19	2.5	1.9	1.2
3,500	2.5	27	1.8	1.4	0.9
4,000	2.2	35	1.4	1.1	0.7
4,500	1.9	43	1.1	0.8	0.5
5,000	1.7	54	0.9	0.7	0.4
6,000	1.4	76	0.6	0.4	0.3

P2000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	10.7	29.8	27.3	23.8	20.2
750	10.1	27.0	23.8	19.3	15.3
1,000	8.5	22.3	18.0	12.9	9.6
1,250	6.9	17.6	12.9	9.0	6.8
1,500	5.6	13.5	9.6	6.8	5.2
1,750	4.6	10.5	7.6	5.5	4.3
2,000	3.8	8.5	6.2	4.6	3.6
2,250	3.3	7.1	5.2	4.0	3.2
2,500	2.8	6.1	4.6	3.5	2.8
2,750	2.5	5.3	4.1	3.1	**

P2001 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	18.7	67.0	65.1	62.2	59.1
750	18.4	64.9	62.2	58.3	54.2
1,000	17.9	61.0	56.9	51.5	46.3
1,250	17.3	56.6	51.5	45.0	39.5
1,500	16.5	52.1	46.3	39.5	34.0
1,750	15.5	47.9	41.6	34.8	27.9
2,000	14.5	43.9	37.5	30.4	21.3
2,250	13.6	40.2	34.0	24.3	16.9
2,500	12.5	37.0	30.4	19.7	13.7
2,750	11.3	34.2	25.4	16.3	11.3

P2000/P2001 - ELEMENTS OF SECTION (METRIC)

Parameter	P2000	P2001
Area of Section	2.21 cm ²	4.41 cm ²
Axis 1-1		
Moment of Inertia (I)	5.19 cm ⁴	25.74 cm ⁴
Section Modulus (S)	2.29 cm ³	6.24 cm ³
Radius of Gyration (r)	1.53 cm	2.42 cm
Axis 2-2		
Moment of Inertia (I)	6.29 cm ⁴	12.58 cm ⁴
Section Modulus (S)	3.05 cm ³	6.10 cm ³
Radius of Gyration (r)	1.69 cm	1.69 cm

Notes:

* Load limited by spot weld shear.

** $K L_r > 200$




NR = Not Recommended.

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ...85% "KO" Series... 95%
 "SL" Series ...85% "HS" Series... 90%






P3000



Wt/100 Ft: 170 Lbs (253 kg/100 m)
 Allowable Moment 3,840 In-Lbs (430 N·m)
 12 Gauge Nominal Thickness .105" (2.7mm)


P3001



Wt/100 Ft: 340 Lbs (506 kg/100 m)
 Allowable Moment 10,810 In-Lbs (1,220 N·m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P3000 HS


9/16" (14) Dia. Holes
 1 7/8" (48) on Center



Wt/100 Ft: 165 Lbs (246 kg/100 m)

P3000 KO


7/8" (22) Knockouts
 6" (152) on Center



Wt/100 Ft: 170 Lbs (253 kg/100 m)

P3000 SL


Slots are
 3" (76) x 1 3/32" (10.3)
 4" (102) on Center



Wt/100 Ft: 165 Lbs (246 kg/100 m)

P3000 T


Slots are
 1 1/8" (29) x 9/16" (14)
 2" (51) on Center



Wt/100 Ft: 165 Lbs (246 kg/100 m)

P3001 T

Slots are
 1 1/8" (29) x 9/16" (14)
 2" (51) on Center



Wt/100 Ft: 340 Lbs (506 kg/100 m)

CHANNEL NUTS (REFER TO HARDWARE SECTION FOR DETAILS)



P1006-0832
P1006-1024
P1006-1420
P1007
P1008
P1009
P1010



P1008T
P1006T1420
P1010T



P1024
P1012S
P1023S



P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3010



P3016-0632
P3016-0832
P3016-1024
P3016-1420



P1012
P1023
P1024S

Channel Finishes: PL, GR, HG, PG; Standard Lengths: 10' & 20'

1 1/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P3000 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,280	0.07	1,280	1,280	1,280
36	850	0.15	850	850	580
48	640	0.26	640	490	330
60	510	0.41	420	310	210
72	430	0.59	290	220	150
84	370	0.81	210	160	110
96	320	1.05	160	120	80
108	280	1.30	130	100	60
120	260	1.66	100	80	50
144	210	2.32	70	50	40
168	180	3.15	50	40	30
192	160	4.18	40	30	NR
216	140	5.21	NR	NR	NR
240	130	6.64	NR	NR	NR

P3001 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	2,960*	0.03	2,960*	2,960*	2,960*
36	2,400	0.08	2,400	2,400	2,400
48	1,800	0.15	1,800	1,800	1,610
60	1,440	0.23	1,440	1,440	1,030
72	1,200	0.33	1,200	1,080	720
84	1,030	0.46	1,030	790	530
96	900	0.59	810	610	400
108	800	0.75	640	480	320
120	720	0.93	520	390	260
144	600	1.34	360	270	180
168	510	1.81	260	200	130
192	450	2.38	200	150	100
216	400	3.01	160	120	80
240	360	3.72	130	100	NR

P3000 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	3,180	9,690	8,980	8,050	7,210
36	2,920	8,160	7,210	6,130	5,240
48	2,590	6,820	5,810	4,730	3,860
60	2,300	5,740	4,730	3,690	2,990
72	2,040	4,850	3,860	2,990	2,270
84	1,830	4,100	3,240	2,400	**
96	1,650	3,530	2,770	1,840	**
108	1,450	3,080	2,270	**	**
120	1,250	2,710	1,840	**	**

P3001 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	5,740	21,780	21,200	20,430	19,720
36	5,620	20,520	19,720	18,830	17,680
48	5,520	19,400	18,570	16,570	14,260
60	5,330	18,510	16,570	13,670	10,810
72	5,030	16,850	14,260	10,810	7,730
84	4,630	14,990	11,930	8,180	5,680
96	4,190	13,090	9,720	6,260	4,350
108	3,720	11,230	7,730	4,950	**
120	3,300	9,460	6,260	4,010	**
144	2,620	6,590	4,350	**	**

P3000/P3001 - ELEMENTS OF SECTION

Parameter	P3000		P3001	
Area of Section	0.500	In ²	1.000	In ²
Axis 1-1				
Moment of Inertia (I)	0.120	In ⁴	0.591	In ⁴
Section Modulus (S)	0.153	In ³	0.430	In ³
Radius of Gyration (r)	0.489	In	0.769	In
Axis 2-2				
Moment of Inertia (I)	0.203	In ⁴	0.407	In ⁴
Section Modulus (S)	0.250	In ³	0.501	In ³
Radius of Gyration (r)	0.638	In	0.638	In

Notes:

* Load limited by spot weld shear.

** $KL_r > 200$

NR = Not Recommended.

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%



P3000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	5.8	2	5.8	5.8	5.8
750	4.6	3	4.6	4.6	3.8
1,000	3.5	4	3.5	3.2	2.2
1,250	2.8	7	2.8	2.1	1.4
1,500	2.3	10	1.9	1.4	1.0
1,750	2.0	14	1.4	1.1	0.7
2,000	1.7	18	1.1	0.8	0.5
2,500	1.4	28	0.7	0.5	0.4
3,000	1.2	40	0.5	0.4	0.2
3,500	1.0	54	0.4	0.3	0.2
4,000	0.9	73	0.3	0.2	0.1
4,500	0.8	89	0.2	0.2	NR
5,000	0.7	115	0.2	0.1	NR
6,000	0.6	161	NR	NR	NR

P3001 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	13.2 *	1	13.2 *	13.2 *	13.2 *
750	13.0	1	13.0	13.0	13.0
1,000	9.8	3	9.8	9.8	9.8
1,250	7.8	4	7.8	7.8	6.9
1,500	6.5	6	6.5	6.5	4.8
1,750	5.6	8	5.6	5.2	3.5
2,000	4.9	10	4.9	4.0	2.7
2,500	3.9	16	3.4	2.6	1.7
3,000	3.2	23	2.4	1.8	1.2
3,500	2.8	31	1.7	1.3	0.9
4,000	2.4	41	1.3	1.0	0.7
4,500	2.2	52	1.1	0.8	0.5
5,000	2.0	64	0.8	0.6	0.4
6,000	1.6	92	0.6	0.4	0.3

P3000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	14.2	43.3	40.2	36.1	32.4
750	13.6	39.9	36.1	31.5	27.6
1,000	12.5	34.5	30.2	25.3	21.3
1,250	11.4	29.8	25.3	20.5	16.7
1,500	10.3	25.8	21.3	16.7	13.6
1,750	9.4	22.5	18.1	14.0	11.0
2,000	8.5	19.6	15.5	11.9	8.5
2,250	7.8	17.2	13.6	9.6	**
2,500	7.2	15.3	11.9	**	**
2,750	6.4	13.7	10.1	**	**

P3001 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	25.5	97.1	94.5	91.1	88.0
750	25.3	94.3	91.1	87.3	84.0
1,000	24.9	89.8	86.1	82.2	74.5
1,250	24.6	85.8	82.2	72.4	61.8
1,500	23.8	82.6	74.5	61.8	49.2
1,750	22.8	77.0	66.1	51.3	37.5
2,000	21.4	70.3	57.6	41.3	28.7
2,250	19.9	63.4	49.2	32.7	22.7
2,500	18.2	56.5	41.3	26.5	18.4
2,750	16.5	49.8	34.2	21.9	**

P3000/P3001 - ELEMENTS OF SECTION (METRIC)

Parameter	P3000		P3001	
	Value	Unit	Value	Unit
Area of Section	3.23	cm ²	6.45	cm ²
Axis 1-1				
Moment of Inertia (I)	4.97	cm ⁴	24.61	cm ⁴
Section Modulus (S)	2.51	cm ³	7.05	cm ³
Radius of Gyration (r)	1.24	cm	1.95	cm
Axis 2-2				
Moment of Inertia (I)	8.47	cm ⁴	16.93	cm ⁴
Section Modulus (S)	4.10	cm ³	8.20	cm ³
Radius of Gyration (r)	1.62	cm	1.62	cm

Notes:

* Load limited by spot weld shear.




** $KL/r > 200$

NR = Not Recommended.

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:




"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%

P3300

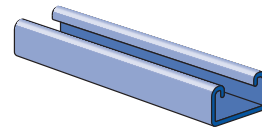

Wt/100 Ft: 134 Lbs (200 kg/100 m)
 Allowable Moment 1,800 In-Lbs (200 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)


P3301

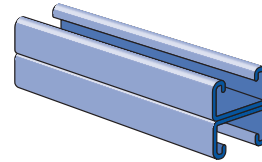

Wt/100 Ft: 269 Lbs (400 kg/100 m)
 Allowable Moment 5,060 In-Lbs (570 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P3300 HS


9/16" (14) Dia. Holes
 1 7/8" (48) on Center



Wt/100 Ft: 130 Lbs (193 kg/100 m)

P3300 T


Slots are
 1 1/8" (29) x 9/16" (14)
 2" (51) on Center



Wt/100 Ft: 130 Lbs (193 kg/100 m)

P3300 SL


Slots are
 3" (76) x 1 3/32" (10.3)
 4" (102) on Center



Wt/100 Ft: 130 Lbs (193 kg/100 m)

P3301 T

Slots are
 1 1/8" (29) x 9/16" (14)
 2" (51) on Center



Wt/100 Ft: 270 Lbs (402 kg/100 m)

CHANNEL NUTS (REFER TO HARDWARE SECTION FOR DETAILS)



P4006-0832
P4006-1024
P4006-1420
P4007
P4008
P4009
P4010



P4006T-1420
P4008T
P4010T



P4012S
P4023S



P4012
P4023



P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3013



P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG; Standard Lengths: 10' & 20'



P3300 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	600	0.10	600	600	400
36	400	0.22	360	270	180
48	300	0.40	200	150	100
60	240	0.62	130	100	60
72	200	0.89	90	70	40
84	170	1.20	70	50	30
96	150	1.59	50	40	30
108	130	1.96	40	30	20
120	120	2.48	30	20	20

P3301 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,690	0.06	1,690	1,690	1,690
36	1,130	0.13	1,130	1,130	860
48	840	0.23	840	720	480
60	680	0.37	620	460	310
72	560	0.52	430	320	210
84	480	0.71	310	240	160
96	420	0.93	240	180	120
108	380	1.20	190	140	100
120	340	1.47	150	120	80
144	280	2.09	110	80	50

P3300 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	2,360	7,740	7,260	6,350	5,390
36	2,120	6,470	5,390	3,990	2,810
48	1,760	4,910	3,550	2,270	1,580
60	1,380	3,440	2,270	1,460	**
72	1,080	2,390	1,580	**	**

P3301 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	4,290	16,990	16,580	15,770	14,720
36	4,150	15,890	14,720	12,980	11,120
48	3,940	14,160	12,360	9,880	7,510
60	3,650	12,210	9,880	6,940	4,820
72	3,270	10,190	7,510	4,820	3,350
84	2,800	8,220	5,530	3,540	**
96	2,410	6,420	4,240	**	**
108	2,080	5,070	3,350	**	**

P3300/P3301 - ELEMENTS OF SECTION

Parameter	P3300		P3301	
Area of Section	0.395	In ²	0.790	In ²
Axis 1-1				
Moment of Inertia (I)	0.037	In ⁴	0.176	In ⁴
Section Modulus (S)	0.072	In ³	0.201	In ³
Radius of Gyration (r)	0.306	In	0.472	In
Axis 2-2				
Moment of Inertia (I)	0.143	In ⁴	0.285	In ⁴
Section Modulus (S)	0.176	In ³	0.351	In ³
Radius of Gyration (r)	0.601	In	0.601	In

Notes:

* Load limited by spot weld shear.

** $KL/r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%

1 1/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/8" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P3300 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	2.7	2	2.7	2.7	1.9
750	2.2	4	2.2	1.8	1.2
1,000	1.6	7	1.3	1.0	0.7
1,250	1.3	10	0.8	0.6	0.4
1,500	1.1	15	0.6	0.4	0.3
1,750	0.9	21	0.4	0.3	0.2
2,000	0.8	27	0.3	0.3	0.2
2,500	0.7	43	0.2	0.2	0.1
3,000	0.5	60	0.1	0.1	0.1
3,500	0.4	79	0.1	0.1	NR

P3301 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	7.6	1	7.6	7.6	7.6
750	6.1	2	6.1	6.1	5.6
1,000	4.6	4	4.6	4.6	3.2
1,250	3.6	6	3.6	3.1	2.0
1,500	3.1	9	2.8	2.1	1.4
1,750	2.6	12	2.1	1.6	1.0
2,000	2.3	16	1.6	1.2	0.8
2,500	1.8	25	1.0	0.8	0.5
3,000	1.5	36	0.7	0.5	0.4
3,500	1.3	48	0.5	0.4	0.3
4,000	1.2	65	0.4	0.3	0.2

P3300 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	10.5	34.6	32.6	28.6	24.4
750	10.1	32.3	28.6	23.3	18.2
1,000	9.1	26.9	21.6	15.0	10.5
1,250	7.6	21.2	15.0	9.6	6.7
1,500	6.3	15.8	10.5	6.7	**
1,750	5.1	11.6	7.6	**	**

P3301 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kg
600	19.1	75.7	73.9	70.5	66.0
750	18.9	73.8	70.5	64.7	58.4
1,000	18.2	68.6	62.7	53.9	44.8
1,250	17.4	62.1	53.9	42.6	31.9
1,500	16.4	55.0	44.8	31.9	22.2
1,750	15.0	47.6	36.0	23.4	16.3
2,000	13.3	40.3	28.0	17.9	**
2,250	11.8	33.4	22.2	14.1	**
2,500	10.4	27.2	17.9	**	**
2,750	9.2	22.5	14.8	**	**

P3300/P3301 - ELEMENTS OF SECTION (METRIC)

Parameter	P3300	P3301
Area of Section	2.55 cm ²	5.10 cm ²
Axis 1-1		
Moment of Inertia (I)	1.54 cm ⁴	7.33 cm ⁴
Section Modulus (S)	1.18 cm ³	3.30 cm ³
Radius of Gyration (r)	0.78 cm	1.20 cm
Axis 2-2		
Moment of Inertia (I)	5.94 cm ⁴	11.87 cm ⁴
Section Modulus (S)	2.88 cm ³	5.75 cm ³
Radius of Gyration (r)	1.53 cm	1.53 cm

Notes:

* Load limited by spot weld shear.



** $K_L/r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%





P4000

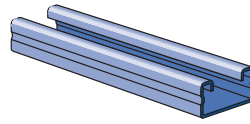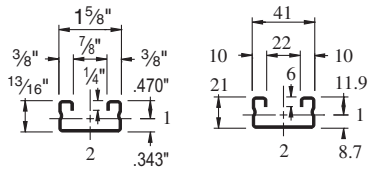



Wt/100 Ft: 83 Lbs (123 kg/100 m)
 Allowable Moment 1,230 In-Lbs (140 N·m)
 16 Gauge Nominal Thickness .060" (1.5mm)

P4001

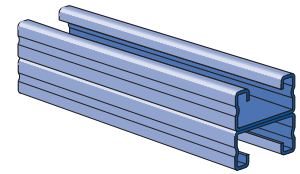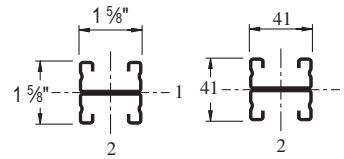



Wt/100 Ft: 166 Lbs (246 kg/100 m)
 Allowable Moment 3,210 In-Lbs (360 N·m)
 16 Gauge Nominal Thickness .060" (1.5mm)

P4003

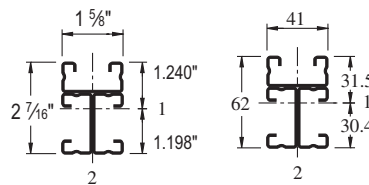

Wt/100 Ft: 248 Lbs (370 kg/100 m)
 Allowable Moment 8,600 In-Lbs (970 N·m)
 16 Gauge Nominal Thickness .060" (1.5mm)


P4004

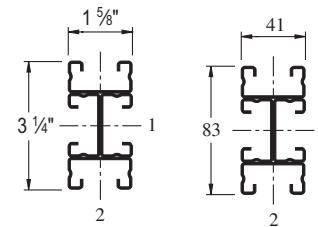

Wt/100 Ft: 331 Lbs (493 kg/100 m)
 Allowable Moment 13,650 In-Lbs (1,540 N·m)
 16 Gauge Nominal Thickness .060" (1.5mm)

P4000 HS


9/16" (14) Dia. Holes
 1 7/8" (48) on Center



Wt/100 Ft: 79 Lbs (118 kg/100 m)

P4000 T


Slots are
 1 1/8" (29) x 9/16" (14)
 2" (51) on Center



Wt/100 Ft: 79 Lbs (118 kg/100 m)

P4000 SL

Slots are
 3" (76) x 1 3/32" (10.3)
 4" (102) on Center



Wt/100 Ft: 79 Lbs (118 kg/100 m)

CHANNEL NUTS (REFER TO HARDWARE SECTION FOR DETAILS)



P4006-0832
P4006-1024
P4006-1420
P4007
P4008
P4009
P4010



P4006T1420
P4008T
P4010T



P4012S
P4023S



P4012
P4023



P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3013



P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG; Standard Lengths: 10' & 20'

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P4000 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	410	0.11	410	370	250
36	270	0.24	220	170	110
48	200	0.43	120	90	60
60	160	0.67	80	60	40
72	140	1.01	60	40	30
84	120	1.38	40	30	20
96	100	1.72	30	20	20
108	90	2.20	20	20	10
120	80	2.68	20	10	10

P4001 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	810*	0.05	810*	810*	810*
36	710	0.14	710	710	500
48	540	0.25	540	430	280
60	430	0.40	360	270	180
72	360	0.57	250	190	130
84	310	0.78	190	140	90
96	270	1.02	140	110	70
108	240	1.29	110	80	60
120	210	1.54	90	70	50
144	180	2.29	60	50	30

P4000 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	1,630	4,670	4,290	3,780	3,310
36	1,450	3,840	3,310	2,460	1,730
48	1,160	3,030	2,190	1,400	970
60	870	2,120	1,400	900	**
72	670	1,470	970	**	**

P4001 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	2,830	10,390	10,000	9,470	8,960
36	2,740	9,530	8,960	7,870	6,700
48	2,590	8,620	7,480	5,910	4,440
60	2,340	7,380	5,910	4,090	2,840
72	2,020	6,110	4,440	2,840	1,970
84	1,700	4,880	3,260	2,090	**
96	1,440	3,780	2,500	**	**
108	1,230	2,990	1,970	**	**

P4000/P4001 - ELEMENTS OF SECTION

Parameter	P4000		P4001	
Area of Section	0.244	In ²	0.487	In ²
Axis 1-1				
Moment of Inertia (I)	0.023	In ⁴	0.104	In ⁴
Section Modulus (S)	0.049	In ³	0.128	In ³
Radius of Gyration (r)	0.306	In	0.462	In
Axis 2-2				
Moment of Inertia (I)	0.092	In ⁴	0.183	In ⁴
Section Modulus (S)	0.113	In ³	0.225	In ³
Radius of Gyration (r)	0.613	In	0.613	In

Notes:

* Load limited by spot weld shear.

** $KL_r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Reduce Beam Load Values as Follows:

"T" Series ... 85% "SL" Series... 85%
 "HS" Series ... 90%



P4000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	1.9	3	1.9	1.7	1.2
750	1.5	4	1.5	1.1	0.7
1,000	1.1	8	0.8	0.6	0.4
1,250	0.9	12	0.5	0.4	0.3
1,500	0.8	17	0.4	0.3	0.2
1,750	0.6	23	0.3	0.2	0.1
2,000	0.5	29	0.2	0.1	0.1
2,500	0.4	47	0.1	0.1	NR
3,000	0.4	65	0.1	0.1	NR

P4001 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	3.6 *	1	3.6 *	3.6 *	3.6 *
750	3.6 *	2	3.6 *	3.6 *	3.3
1,000	2.9	4	2.9	2.8	1.9
1,250	2.3	7	2.3	1.8	1.2
1,500	2.0	10	1.6	1.2	0.8
1,750	1.6	13	1.2	0.9	0.6
2,000	1.5	17	0.9	0.7	0.5
2,500	1.2	27	0.6	0.4	0.3
3,000	1.0	39	0.4	0.3	0.2
3,500	0.8	54	0.3	0.2	0.1

P4000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Al- lowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	7.2	20.9	19.2	17.0	14.9
750	6.9	19.1	17.0	14.4	11.3
1,000	6.1	16.1	13.3	9.2	6.5
1,250	5.0	13.0	9.2	5.9	4.1
1,500	4.0	9.7	6.5	4.1	**
1,750	3.2	7.2	4.7	**	**

P4001 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	12.6	46.3	44.6	42.3	40.0
750	12.4	44.5	42.3	39.5	35.4
1,000	12.1	41.3	38.2	32.6	26.9
1,250	11.4	37.8	32.6	25.4	18.8
1,500	10.5	33.3	26.9	18.8	13.0
1,750	9.4	28.6	21.3	13.8	9.6
2,000	8.1	24.1	16.5	10.5	**
2,250	7.1	19.8	13.0	8.4	**
2,500	6.2	16.0	10.5	**	**
2,750	5.4	13.2	8.7	**	**

P4000/P4001 - ELEMENTS OF SECTION (METRIC)

Parameter	P4000		P4001	
Area of Section	1.57	cm ²	3.14	cm ²
Axis 1-1				
Moment of Inertia (I)	0.95	cm ⁴	4.32	cm ⁴
Section Modulus (S)	0.80	cm ³	2.09	cm ³
Radius of Gyration (r)	0.78	cm	1.17	cm
Axis 2-2				
Moment of Inertia (I)	3.81	cm ⁴	7.62	cm ⁴
Section Modulus (S)	1.85	cm ³	3.69	cm ³
Radius of Gyration (r)	1.56	cm	1.56	cm

Notes:

* Load limited by spot weld shear.

** $KL_r > 200$


- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Reduce Beam Load Values as Follows:

"T" Series ... 85% "SL" Series... 85%

"HS" Series ... 90%


1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/8" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P4100

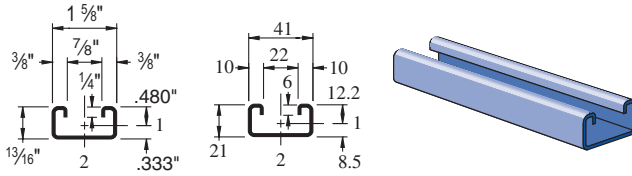

Wt/100 Ft: 98 Lbs (147 kg/100 m)
 Allowable Moment 1,360 In-Lbs (150 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)


P4101

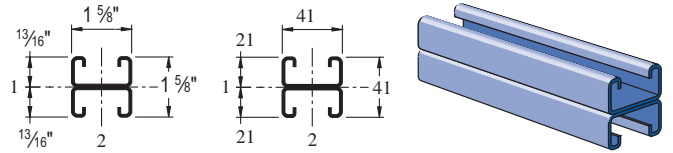

Wt/100 Ft: 197 Lbs (293 kg/100 m)
 Allowable Moment 3,610 In-Lbs (410 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

P4100 HS


3/16" (14) Dia. Holes
 1 7/8" (48) on Center



Wt/100 Ft: 87 Lbs (129 kg/100 m)

P4100 T


Slots are
 1 1/8" (29) x 3/16" (14)
 2" (51) on Center



Wt/100 Ft: 87 Lbs (129 kg/100 m)

P4100 SL


Slots are
 3" (76) x 1 3/32" (10.3)
 4" (102) on Center



Wt/100 Ft: 87 Lbs (129 kg/100 m)

P4101 T

Slots are
 1 1/8" (29) x 3/16" (14)
 2" (51) on Center



Wt/100 Ft: 174 Lbs (259 kg/100 m)

CHANNEL NUTS (REFER TO HARDWARE SECTION FOR DETAILS)



P4006-0832
 P4006-1024
 P4006-1420
 P4007
 P4008
 P4009
 P4010



P4006T1420
 P4008T
 P4010T



P4012S
 P4023S



P4012
 P4023



P3006-0832
 P3006-1024
 P3006-1420
 P3007
 P3008
 P3009
 P3013



P3016-0632
 P3016-0832
 P3016-1024
 P3016-1420

Channel Finishes: PL, GR, HG, PG; Standard Lengths: 10' & 20'



P4100 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	450	0.11	450	420	280
36	300	0.24	250	190	130
48	230	0.44	140	110	70
60	180	0.67	90	70	50
72	150	0.96	60	50	30
84	130	1.32	50	30	20
96	110	1.67	40	30	20
108	100	2.16	30	20	10
120	90	2.67	20	20	10
144	80	4.09	20	NR	NR
168	60	4.88	NR	NR	NR
192	60	7.28	NR	NR	NR
216	50	8.64	NR	NR	NR
240	50	11.85	11.85	NR	NR

P4101 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,090*	0.06	1,090*	1,090*	1,090*
36	800	0.14	800	800	570
48	600	0.25	600	480	320
60	480	0.39	410	310	200
72	400	0.57	280	210	140
84	340	0.76	210	160	100
96	300	1.00	160	120	80
108	270	1.29	130	90	60
120	240	1.57	100	80	50
144	200	2.26	70	50	40
168	170	3.05	50	40	30
192	150	4.02	40	NR	NR
216	130	4.96	NR	NR	NR
240	120	6.28	NR	NR	NR

P4100 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	1,840	5,610	5,210	4,570	3,850
36	1,640	4,660	3,850	2,800	1,960
48	1,310	3,490	2,480	1,590	1,100
60	1,000	2,400	1,590	**	**
72	770	1,670	1,100	**	**

P4101 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	3,240	12,370	11,950	11,370	10,540
36	3,120	11,470	10,540	9,160	7,720
48	2,940	10,090	8,680	6,770	4,980
60	2,680	8,560	6,770	4,590	3,190
72	2,310	7,010	4,980	3,190	2,220
84	1,950	5,530	3,660	2,340	**
96	1,650	4,250	2,800	**	**
108	1,410	3,360	2,220	**	**

P4100/P4101 - ELEMENTS OF SECTION

Parameter	P4100		P4101	
	Value	Unit	Value	Unit
Area of Section	0.290	In ²	0.579	In ²
Axis 1-1				
Moment of Inertia (I)	0.026	In ⁴	0.117	In ⁴
Section Modulus (S)	0.054	In ³	0.143	In ³
Radius of Gyration (r)	0.298	In	0.449	In
Axis 2-2				
Moment of Inertia (I)	0.107	In ⁴	0.214	In ⁴
Section Modulus (S)	0.132	In ³	0.264	In ³
Radius of Gyration (r)	0.609	In	0.608	In

Notes:

* Load limited by spot weld shear.

** $KL/r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "SL" Series... 85%
 "HS" Series ... 90%

1 5/8" Channel
 Teleslur System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P4100 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	2.0	3	2.0	2.0	1.3
750	1.6	4	1.6	1.2	0.8
1,000	1.2	7	0.9	0.7	0.4
1,250	1.0	11	0.6	0.4	0.3
1,500	0.8	16	0.4	0.3	0.2
1,750	0.7	23	0.3	0.2	0.1
2,000	0.6	30	0.2	0.2	0.1
2,500	0.5	46	0.1	0.1	0.1
3,000	0.4	65	0.1	0.1	NR

P4101 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	4.8 *	1	4.8 *	4.8 *	4.8 *
750	4.4	2	4.4	4.4	3.7
1,000	3.2	4	3.2	3.2	2.1
1,250	2.6	7	2.6	2.0	1.3
1,500	2.2	10	1.9	1.4	0.9
1,750	1.9	13	1.4	1.0	0.7
2,000	1.6	17	1.1	0.8	0.5
2,500	1.3	27	0.7	0.5	0.4
3,000	1.1	38	0.5	0.4	0.2
3,500	0.9	53	0.4	0.3	0.2

P4100 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	8.2	25.1	23.3	20.6	17.4
750	7.8	23.2	20.6	16.6	12.8
1,000	6.9	19.3	15.3	10.5	7.3
1,250	5.6	15.0	10.5	6.7	4.7
1,500	4.5	11.0	7.3	4.7	**
1,750	3.6	8.1	5.3	**	**

P4101 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	14.4	55.1	53.3	50.8	47.2
750	14.2	53.2	50.8	46.3	41.2
1,000	13.7	49.4	44.7	37.8	30.8
1,250	13.0	44.2	37.8	29.1	21.1
1,500	12.0	38.7	30.8	21.1	14.6
1,750	10.7	33.0	24.2	15.5	10.8
2,000	9.3	27.4	18.5	11.9	**
2,250	8.1	22.2	14.6	9.4	**

P4100/P4101 - ELEMENTS OF SECTION (METRIC)

Parameter	P4100	P4101
Area of Section	1.87 cm ²	3.74 cm ²
Axis 1-1		
Moment of Inertia (I)	1.07 cm ⁴	4.85 cm ⁴
Section Modulus (S)	0.88 cm ³	2.35 cm ³
Radius of Gyration (r)	0.76 cm	1.14 cm
Axis 2-2		
Moment of Inertia (I)	4.46 cm ⁴	8.93 cm ⁴
Section Modulus (S)	2.16 cm ³	4.32 cm ³
Radius of Gyration (r)	1.55 cm	1.55 cm

Notes:

* Load limited by spot weld shear.



** $KL_i > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "SL" Series... 85%
 "HS" Series ... 90%





P5000

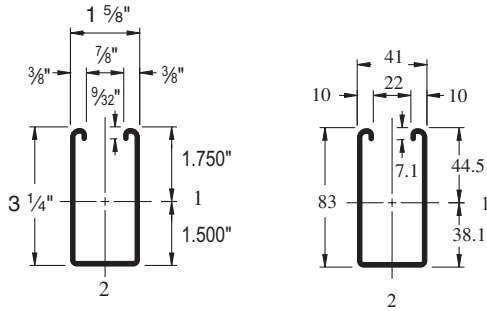

Wt/100 Ft: 305 Lbs (454 kg/100 m)
 Allowable Moment 15,770 In-Lbs (1,780 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)


P5001

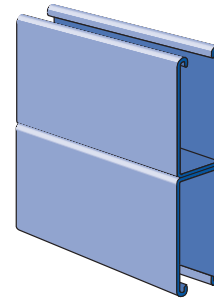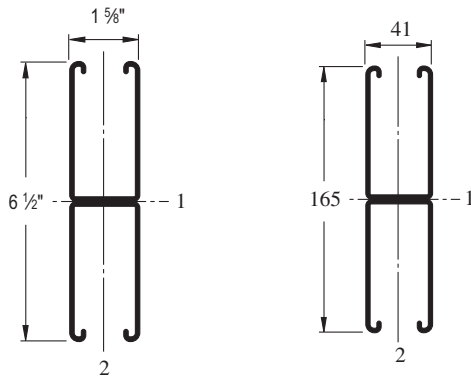

Wt/100 Ft: 610 Lbs (907 kg/100 m)
 Allowable Moment 48,180 In-Lbs (5,440 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P5000 HS


9/16" (14) Dia. Holes
 1 7/8" (48) on Center



Wt/100 Ft: 300 Lbs (446 kg/100 m)

P5000 KO


7/8" (22) Knockouts
 6" (152) on Center



Wt/100 Ft: 305 Lbs (454 kg/100 m)

P5000 SL


Slots are
 3" (76) x 1 3/32" (10.3)
 4" (102) on Center



Wt/100 Ft: 300 Lbs (446 kg/100 m)

P5000 T

Slots are
 1 1/8" (29) x 9/16" (14)
 2" (51) on Center



Wt/100 Ft: 300 Lbs (446 kg/100 m)

CHANNEL NUTS (REFER TO HARDWARE SECTION FOR DETAILS)



P1006T1420
P1008T
P1010T



P1012
P1023
P1024



P3006-0832
P3006-1024
P3006-1420
P3007
P3008
P3009
P3010



P3016-0632
P3016-0832
P3016-1024
P3016-1420

Channel Finishes: PL, GR, HG, PG; Standard Lengths: 10' & 20'

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P5000 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	5,260	0.03	5,260	5,260	5,260
36	3,500	0.07	3,500	3,500	3,500
48	2,630	0.12	2,630	2,630	2,630
60	2,100	0.18	2,100	2,100	1,920
72	1,750	0.26	1,750	1,750	1,330
84	1,500	0.36	1,500	1,470	980
96	1,310	0.47	1,310	1,120	750
108	1,170	0.59	1,170	890	590
120	1,050	0.73	960	720	480
144	880	1.06	670	500	330
168	750	1.43	490	370	240
192	660	1.88	370	280	190
216	580	2.35	300	220	150
240	530	2.95	240	180	120

P5001 - BEAM LOADING

Max Span In	Defl. at Allowable Uniform Load Lbs	Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	6,890*	0.01	6,890*	6,890*	6,890*
36	6,890*	0.02	6,890*	6,890*	6,890*
48	6,890*	0.05	6,890*	6,890*	6,890*
60	6,420	0.10	6,420	6,420	6,420
72	5,350	0.14	5,350	5,350	5,350
84	4,590	0.19	4,590	4,590	4,590
96	4,020	0.25	4,020	4,020	4,020
108	3,570	0.32	3,570	3,570	3,360
120	3,210	0.39	3,210	3,210	2,720
144	2,680	0.57	2,680	2,680	1,890
168	2,290	0.77	2,290	2,080	1,390
192	2,010	1.01	2,010	1,590	1,060
216	1,780	1.27	1,680	1,260	840
240	1,610	1.58	1,360	1,020	680

P5000 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	5,650	16,870	15,180	12,850	10,600
36	4,690	13,140	10,600	7,650	5,660
48	3,560	9,550	6,860	4,790	3,660
60	2,730	6,680	4,790	3,450	2,710
72	2,160	4,980	3,660	2,710	2,170
84	1,760	3,950	2,960	2,240	1,820
96	1,500	3,270	2,500	1,930	1,580
108	1,310	2,800	2,170	1,690	1,390
120	1,170	2,450	1,930	1,510	**
144	980	1,980	1,580	**	**
168	850	1,670	1,340	**	**

P5001 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	10,670	39,230	38,030	36,210	34,240
36	10,350	36,450	34,240	31,200	28,260
48	9,940	33,220	30,200	26,430	23,190
60	9,290	29,950	26,430	22,470	19,380
72	8,560	26,880	23,190	19,380	16,450
84	7,860	24,140	20,520	17,040	12,090
96	7,220	21,790	18,370	13,330	9,250
108	6,600	19,790	16,450	10,530	7,310
120	5,760	18,130	13,330	8,530	**
144	4,390	14,020	9,250	**	**
168	3,420	10,300	6,800	**	**

P5000/P5001 - ELEMENTS OF SECTION

Parameter	P5000		P5001	
Area of Section	0.897	In ²	1.793	In ²
Axis 1-1				
Moment of Inertia (I)	1.098	In ⁴	6.227	In ⁴
Section Modulus (S)	0.627	In ³	1.916	In ³
Radius of Gyration (r)	1.107	In	1.864	In
Axis 2-2				
Moment of Inertia (I)	0.433	In ⁴	0.866	In ⁴
Section Modulus (S)	0.533	In ³	1.066	In ³
Radius of Gyration (r)	0.695	In	0.695	In

Notes:

* Load limited by spot weld shear.

** $KL_i > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%



P5000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	23.8	1	23.8	23.8	23.8
750	19.0	1	19.0	19.0	19.0
1,000	14.2	2	14.2	14.2	14.2
1,250	11.4	3	11.4	11.4	11.4
1,500	9.5	5	9.5	9.5	8.8
1,750	8.1	6	8.1	8.1	6.5
2,000	7.1	8	7.1	7.1	4.9
2,500	5.7	12	5.7	4.8	3.2
3,000	4.8	18	4.4	3.3	2.2
3,500	4.1	25	3.2	2.4	1.6
4,000	3.6	32	2.5	1.9	1.2
4,500	3.2	40	2.0	1.5	1.0
5,000	2.8	50	1.6	1.2	0.8
6,000	2.4	71	1.1	0.8	0.5

P5001 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	30.6 *	0	30.6 *	30.6 *	30.6 *
750	30.6 *	0	30.6 *	30.6 *	30.6 *
1,000	30.6 *	1	30.6 *	30.6 *	30.6 *
1,250	30.6 *	1	30.6 *	30.6 *	30.6 *
1,500	29.0	2	29.0	29.0	29.0
1,750	24.9	3	24.9	24.9	24.9
2,000	21.8	4	21.8	21.8	21.8
2,500	17.4	7	17.4	17.4	17.4
3,000	14.5	10	14.5	14.5	12.5
3,500	12.5	13	12.5	12.5	9.2
4,000	10.9	17	10.9	10.5	7.0
4,500	9.7	22	9.7	8.3	5.6
5,000	8.7	27	8.7	6.8	4.5
6,000	7.2	39	6.2	4.7	3.1

P5000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	25.2	75.5	68.1	58.0	48.0
750	23.5	67.5	58.0	45.7	35.0
1,000	19.4	53.7	41.9	29.3	21.8
1,250	15.4	41.0	29.3	20.5	15.7
1,500	12.4	30.5	21.8	15.7	12.3
1,750	10.2	23.8	17.3	12.8	10.2
2,000	8.5	19.3	14.4	10.8	8.7
2,250	7.3	16.3	12.3	9.4	7.6
2,500	6.5	14.1	10.8	8.3	6.9
2,750	5.8	12.4	9.6	7.5	6.2

P5001 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	47.5	174.9	169.7	161.7	153.2
750	46.8	169.2	161.7	150.9	139.8
1,000	45.6	158.2	147.2	132.6	118.8
1,250	44.0	146.3	132.6	115.6	101.2
1,500	41.6	134.3	118.8	101.2	87.4
1,750	38.9	122.9	106.6	89.4	76.8
2,000	36.3	112.5	96.2	80.0	61.2
2,250	33.9	103.2	87.4	69.6	48.4
2,500	31.6	95.0	80.0	56.4	39.1
2,750	29.3	87.8	72.9	46.6	32.4

P5000/P5001 - ELEMENTS OF SECTION (METRIC)

Parameter	P5000	P5001
Area of Section	5.78 cm ²	11.57 cm ²
Axis 1-1		
Moment of Inertia (I)	45.70 cm ⁴	259.17 cm ⁴
Section Modulus (S)	10.28 cm ³	31.40 cm ³
Radius of Gyration (r)	2.81 cm	4.73 cm
Axis 2-2		
Moment of Inertia (I)	18.02 cm ⁴	36.04 cm ⁴
Section Modulus (S)	8.73 cm ³	17.46 cm ³
Radius of Gyration (r)	1.77 cm	1.77 cm

Notes:

* Load limited by spot weld shear.



** $K_L > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%



1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/8" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P5500

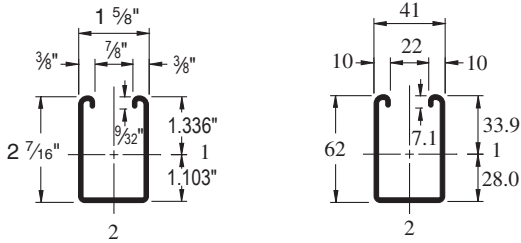

Wt/100 Ft: 247 Lbs (367 kg/100 m)
 Allowable Moment 9,820 In-Lbs (1,110 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)


P5501

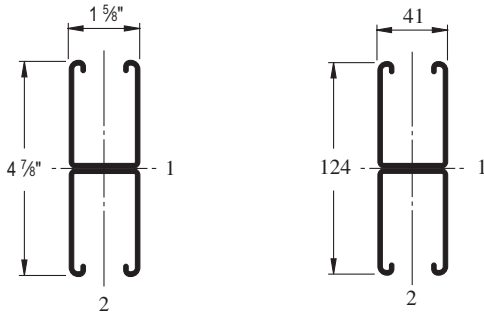

Wt/100 Ft: 494 Lbs (734 kg/100 m)
 Allowable Moment 28,940 In-Lbs (3,270 N•m)
 12 Gauge Nominal Thickness .105" (2.7mm)

P5500 HS


9/16" (14) Dia. Holes
 1 7/8" (48) on Center



Wt/100 Ft: 242 Lbs (360 kg/100 m)

P5500 KO


7/8" (22) Knockouts
 6" (152) on Center



Wt/100 Ft: 247 Lbs (368 kg/100 m)

P5500 SL


Slots are
 3" (76) x 1 3/32" (10.3)
 4" (102) on Center

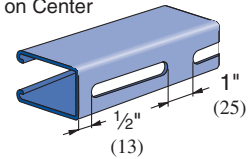

Wt/100 Ft: 242 Lbs (360 kg/100 m)

P5500 T


Slots are
 1 1/8" (29) x 9/16" (14)
 2" (51) on Center

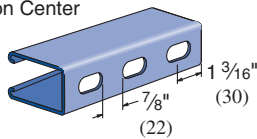

Wt/100 Ft: 242 Lbs (360 kg/100 m)


P5501 T

Slots are
 1 1/8" (29) x 9/16" (14)
 2" (51) on Center

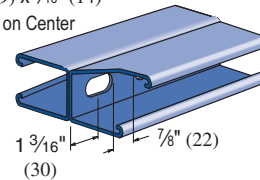

Wt/100 Ft: 494 Lbs (735 kg/100 m)

CHANNEL NUTS (REFER TO HARDWARE SECTION FOR DETAILS)



P5506-0832
 P5506-1024
 P5506-1420
 P5507
 P5508
 P5509
 P5510



P1006T1420
 P1008T
 P1010T



P1012
 P1023
 P1024



P3006-0832
 P3006-1024
 P3006-1420
 P3007
 P3008
 P3009
 P3010



P3016-0632
 P3016-0832
 P3016-1024
 P3016-1420

Channel Finishes: PL, GR, HG, PG; Standard Lengths: 10' & 20'



P5500 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	3,270	0.04	3,270	3,270	3,270
36	2,180	0.09	2,180	2,180	2,180
48	1,640	0.15	1,640	1,640	1,420
60	1,310	0.24	1,310	1,310	910
72	1,090	0.34	1,090	950	630
84	940	0.47	930	700	470
96	820	0.61	710	530	360
108	730	0.78	560	420	280
120	650	0.95	460	340	230
144	550	1.39	320	240	160
168	470	1.70	189	230	120
192	410	1.30	246	180	90
216	360	1.10	307	140	70
240	330	0.90	386	110	60

P5501 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	5,220*	0.01	5,220*	5,220*	5,220*
36	5,220*	0.04	5,220*	5,220*	5,220*
48	4,820	0.08	4,820	4,820	4,820
60	3,860	0.13	3,860	3,860	3,860
72	3,220	0.19	3,220	3,220	3,220
84	2,760	0.26	2,760	2,760	2,500
96	2,410	0.34	2,410	2,410	1,920
108	2,140	0.42	2,140	2,140	1,510
120	1,930	0.52	1,930	1,840	1,230
144	1,610	0.76	1,610	1,280	850
168	1,380	1.03	1,250	940	630
192	1,210	1.35	960	720	480
216	1,070	1.70	760	570	380
240	960	2.09	610	460	310

P5500 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	4,640	13,840	12,570	10,840	9,190
36	3,970	11,050	9,190	7,030	5,370
48	3,180	8,420	6,390	4,620	3,630
60	2,550	6,250	4,620	3,450	2,780
72	2,120	4,790	3,630	2,780	2,260
84	1,810	3,890	3,010	2,330	1,910
96	1,580	3,290	2,580	2,020	1,650
108	1,400	2,860	2,260	1,770	1,440
120	1,270	2,530	2,020	1,580	**
144	1,060	2,070	1,650	**	**
168	920	1,750	1,380	**	**

P5501 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	8,580	31,810	30,880	29,520	28,100
36	8,350	29,700	28,100	26,000	24,070
48	8,080	27,390	25,330	22,910	20,940
60	7,720	25,170	22,910	20,510	17,170
72	7,270	23,190	20,940	17,170	12,700
84	6,780	21,510	18,740	13,430	9,330
96	6,130	20,110	15,630	10,290	7,150
108	5,450	17,750	12,700	8,130	5,650
120	4,800	15,260	10,290	6,590	**
144	3,760	10,830	7,150	**	**
168	2,970	7,950	5,250	**	**

P5500/P5501 - ELEMENTS OF SECTION

Parameter	P5500		P5501	
Area of Section	0.726	In ²	1.452	In ²
Axis 1-1				
Moment of Inertia (I)	0.522	In ⁴	2.805	In ⁴
Section Modulus (S)	0.390	In ³	1.151	In ³
Radius of Gyration (r)	0.848	In	1.390	In
Axis 2-2				
Moment of Inertia (I)	0.334	In ⁴	0.669	In ⁴
Section Modulus (S)	0.411	In ³	0.823	In ³
Radius of Gyration (r)	0.679	In	0.679	In

Notes:

* Load limited by spot weld shear.

** $KL/r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P5500 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	14.8	1	14.8	14.8	14.8
750	11.8	1	11.8	11.8	11.8
1,000	8.9	3	8.9	8.9	8.9
1,250	7.1	4	7.1	7.1	6.1
1,500	5.9	6	5.9	5.9	4.2
1,750	5.1	8	5.1	4.6	3.1
2,000	4.5	10	4.5	3.5	2.4
2,500	3.6	16	3.0	2.3	1.5
3,000	3.0	24	2.1	1.6	1.1
3,500	2.5	32	1.6	1.2	0.8
4,000	2.2	42	1.2	0.9	0.6
4,500	2.0	53	0.9	0.7	0.4
5,000	1.8	66	0.8	0.6	0.4
6,000	1.5	94	0.5	0.4	0.3

P5501 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	23.2 *	0	23.2 *	23.2 *	23.2 *
750	23.2 *	1	23.2 *	23.2 *	23.2 *
1,000	23.2 *	1	23.2 *	23.2 *	23.2 *
1,250	20.9	2	20.9	20.9	20.9
1,500	17.4	3	17.4	17.4	17.4
1,750	14.9	4	14.9	14.9	14.9
2,000	13.1	6	13.1	13.1	12.7
2,500	10.5	9	10.5	10.5	8.1
3,000	8.7	13	8.7	8.5	5.6
3,500	7.5	18	7.5	6.2	4.1
4,000	6.5	23	6.3	4.8	3.2
4,500	5.8	29	5.0	3.7	2.5
5,000	5.2	36	4.1	3.0	2.0
6,000	4.4	52	2.8	2.1	1.4

P5500 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	20.7	61.9	56.4	48.8	41.6
750	19.6	55.9	48.8	39.8	31.9
1,000	16.7	45.7	37.0	27.4	21.0
1,250	13.8	36.4	27.4	19.9	15.7
1,500	11.5	28.5	21.0	15.7	12.6
1,750	9.8	22.6	17.1	13.0	10.6
2,000	8.6	18.9	14.5	11.2	9.1
2,250	7.6	16.2	12.6	9.8	8.0
2,500	6.9	14.2	11.2	8.7	7.2
2,750	6.2	12.7	10.1	7.9	6.4

P5501 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	38.2	141.5	137.4	131.3	125.0
750	37.1	132.1	125.0	115.6	107.1
1,000	35.9	121.8	112.7	101.9	93.1
1,250	34.3	112.0	101.9	91.2	76.4
1,500	32.3	103.2	93.1	76.4	56.5
1,750	30.2	95.7	83.4	59.7	41.5
2,000	27.3	89.5	69.5	45.8	31.8
2,500	24.2	79.0	56.5	36.2	25.1
3,000	21.3	67.9	45.8	29.3	**
3,500	16.7	48.2	31.8	**	**
4,000	13.2	35.4	23.3	**	**

P5500/P5501 - ELEMENTS OF SECTION (METRIC)

Parameter	P5500	P5501
Area of Section	4.68 cm ²	9.37 cm ²
Axis 1-1		
Moment of Inertia (I)	21.71 cm ⁴	116.76 cm ⁴
Section Modulus (S)	6.40 cm ³	18.86 cm ³
Radius of Gyration (r)	2.15 cm	3.53 cm
Axis 2-2		
Moment of Inertia (I)	13.91 cm ⁴	27.83 cm ⁴
Section Modulus (S)	6.74 cm ³	13.48 cm ³
Radius of Gyration (r)	1.72 cm	1.72 cm

Notes:

* Load limited by spot weld shear.



** $KL_r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.
- See page 56 for lateral bracing reduction charts.
- For Pierced Channel, Beam Load Values in the tables are multiplied by the following factor:

"T" Series ... 85% "KO" Series... 95%
 "SL" Series ... 85% "HS" Series... 90%





P1184

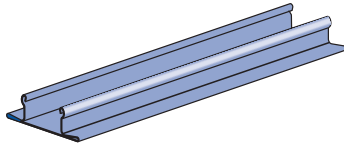

Finish: Pregalvanized, plain.
Standard length: 10' (3m)

Wt/100 Ft: 27 Lbs (40.2 kg/100 m)



P1184 P

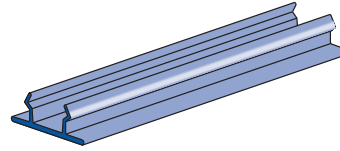

Material: Paintable PVC.
Color: Green, Grey.
Standard length: 10' (3m)

Wt/100 Ft: 11 Lbs (16.5 kg/100 m)



P3184

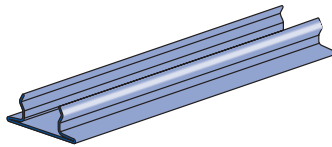

Finish: Green, pre-galvanized, plain.
Standard length: 10' (3m)

Wt/100 Ft: 47 Lbs (69.9 kg/100 m)



P3184 P

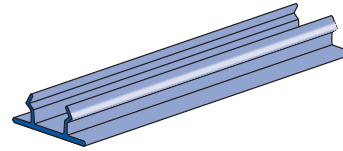

Material : G.E. Noryl® Plastic.
Color: Green, Grey and White.
Standard length: 10' (3m)

Wt/100 Ft: 9.4 Lbs (14.0 kg/100 m)



P3184 F

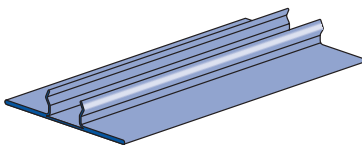

Finish: Green, pre-galvanized, plain.
Standard length: 16' (4.9m)

Wt/100 Ft: 90 Lbs (134 kg/100 m)

P3712 P

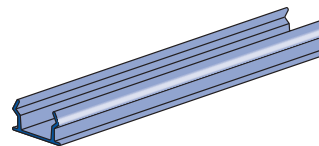

Material: Plastic.
Color: Black.
Standard length: 10' (3m)
Note: Use with P3170, P3270, and P3370 series concrete insert.


Wt/100 Ft: 5.4 Lbs (8.0 kg/100 m)

1 5/8" Channel
Telestrut System
Nuts & Hardware
General Fittings
Pipe/Conduit Supports
Electrical Fittings
Concrete Inserts
1 1/4" Framing System
1 3/16" Framing System
Fiberglass System
Special Metals
PrimeAngle System
Product Index


P2859

FRAME CAPS

P1180, P2280, P4280, P5280, P5580



Part Number*	Use With Channel	Wt/100 pcs Lbs (kg)
P2859-10	P1000	12 5.4
P2859-11	P1001	12 5.4
P2859-12	P3300	5 2.3
P2859-13	P5000	22 10.0
P2859-14	P5500	17 7.7



Part Number	Use With Channel	Wt/100 pcs Lbs (kg)
P1180	P1100	12 5.4
P2280	P2000	11 5.0
P4280	P4000	5 2.3
P5280	P5000	22 10.0
P5580	P5500	17 7.7


Material: .075" (1.9)

Note:
For P3000 see pages 37, 185,
P3300 see pages 39, 185

* Add color suffix:

GR - Green WH - White GY - Grey
"A" series frame caps available


P1280



Use with P1000
Material: .060" (1.5)

Wt/100 pcs: 11 Lbs (5.0 Kg.)

P1280 A, P2280 A




Part Number	Use With Channel	Wt/100 pcs Lbs (kg)
P1280A	P1000	11 5.0
P2280A	P2000	11 5.0

Material: .075" (1.9)


P2860

PLASTIC WHITE END CAPS




P2860-10

Use with P1000, P1100, P2000 channels & P9000 Telestrut.
Wt/100 pcs 3.4 Lbs (1.5 kg)




P2860-33

Use with P3300 channel.
Wt/100 pcs 2.5 Lbs (1.1 kg)



P2860-50

Use with P5000 & P1001 channels.
Wt/100 pcs 5 Lbs (2.3 kg)



P2860-55

Use with P5500 channel.
Wt/100 pcs 4.7 Lbs (2.1 kg)

LATERAL BRACING LOAD REDUCTION CHARTS


Span		Single Channel										Double Channel									
Ft. (m)	In. (cm)	P1000	P1100	P2000	P3000	P3300	P4000	P4100	P5000	P5500	P1001	P1101	P2001	P3001	P3301	P4001	P4101	P5001	P5501		
2 (0.61)	24 (61)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.98	0.99	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00		
3 (0.91)	36 (91)	0.94	0.89	0.88	0.96	1.00	0.94	0.98	0.85	0.89	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00		
4 (1.22)	48 (122)	0.88	0.78	0.75	0.91	1.00	0.88	0.94	0.70	0.77	1.00	0.98	0.98	1.00	1.00	0.98	1.00	0.97	0.98		
5 (1.52)	60 (152)	0.82	0.68	0.61	0.88	0.98	0.83	0.91	0.55	0.67	0.97	0.93	0.92	0.98	1.00	0.93	0.96	0.90	0.93		
6 (1.83)	72 (183)	0.78	0.59	0.48	0.84	0.97	0.79	0.89	0.44	0.58	0.93	0.87	0.85	0.95	0.97	0.88	0.92	0.83	0.87		
7 (2.13)	84 (213)	0.75	0.52	0.41	0.82	0.96	0.75	0.86	0.38	0.51	0.89	0.82	0.78	0.92	0.95	0.83	0.89	0.76	0.81		
8 (2.44)	96 (244)	0.71	0.47	0.35	0.79	0.94	0.72	0.84	0.33	0.46	0.85	0.76	0.71	0.88	0.92	0.79	0.85	0.68	0.76		
9 (2.74)	108 (274)	0.69	0.43	0.32	0.77	0.93	0.69	0.82	0.30	0.42	0.81	0.70	0.64	0.85	0.90	0.74	0.81	0.61	0.70		
10 (3.05)	120 (305)	0.66	0.40	0.29	0.75	0.92	0.66	0.80	0.28	0.40	0.78	0.65	0.57	0.82	0.87	0.69	0.78	0.54	0.64		
12 (3.66)	144 (366)	0.61	0.36	0.25	0.70	0.89	0.60	0.76	0.24	0.36	0.70	0.54	0.45	0.76	0.82	0.60	0.71	0.43	0.53		
14 (4.27)	168 (427)	0.55	0.32	0.23	0.66	0.86	0.55	0.73	0.22	0.32	0.63	0.45	0.38	0.70	0.78	0.51	0.64	0.35	0.45		
16 (4.88)	192 (488)	0.51	0.30	0.21	0.62	0.84	0.50	0.69	0.21	0.30	0.56	0.39	0.32	0.64	0.73	0.44	0.57	0.30	0.39		
18 (5.49)	216 (549)	0.47	0.28	0.19	0.58	0.81	0.47	0.65	0.19	0.28	0.49	0.34	0.28	0.58	0.68	0.39	0.50	0.27	0.34		
20 (6.10)	240 (610)	0.44	0.26	0.18	0.54	0.78	0.43	0.61	0.18	0.26	0.44	0.31	0.25	0.52	0.63	0.35	0.45	0.24	0.30		

BEARING LOADS ON UNISTRUT CHANNEL

Channel	Bearing Length 1 5/8" (41 mm) Maximum Allowable Loads Lbs (kN)		Bearing Length 1 5/8" (41 mm) Maximum Allowable Loads Lbs (kN)		Bearing Length 3 1/4" (82 mm) Maximum Allowable Loads Lbs (kN)	
	Lbs	(kN)	Lbs	(kN)	Lbs	(kN)
P1000	6,700	29	3,100	14	7,700	92
P1100	3,500	15	1,700	7	4,000	18
P2000	2,500	11	1,200	5	3,000	13
P3000	6,700	29	3,200	14	7,700	34
P3300	6,800	29	3,200	14	7,800	34
P4000	2,600	9	1,200	5	3,000	13
P4100	3,500	16	1,800	8	4,100	18
P5000	6,500	28	3,000	13	7,500	33
P5500	6,600	29	3,100	14	7,600	33



TELESTRUT® SYSTEM

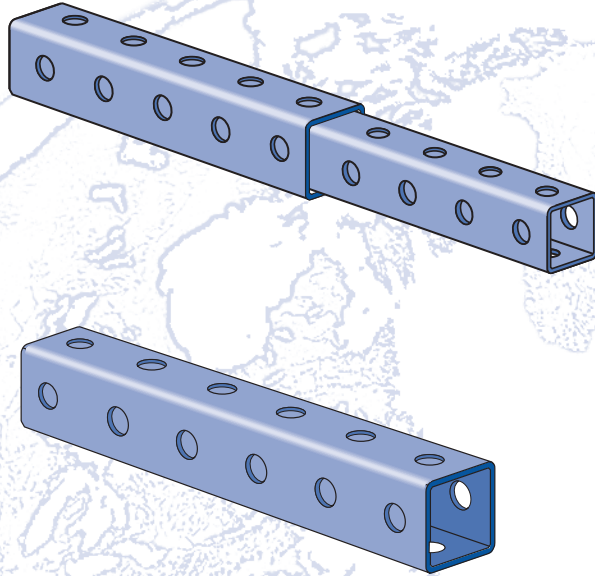

- Telescoping Tube..... 59-61
- Connection Methods 62
- Specialized Fittings 62
- Post Bases 62-63
- Cutting Chart..... 64

MATERIAL

Unistrut channels are accurately and carefully cold formed to size from low-carbon strip steel.

STEEL: PLAIN

12 Ga. (2.7 mm), 14 Ga.(1.9 mm) and
16 Ga. (1.5 mm) ASTM A1011 SS GR 33.

STEEL: PRE-GALVANIZED

12 Ga. (2.7 mm), 14 Ga. (1.9 mm) and
16 Ga. (1.5mm) ASTM A653 GR 33.

FINISHES

Fittings are available in:

- Perma-Green III (GR),
- Electro-galvanized (EG), conforming to
ASTM B633 Type III SC1;
- Hot-dipped Galvanized (HG), conforming to
ASTM A123 or A153
- Plain (PL).

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

DESIGN BOLT TORQUE

BOLT SIZE	¼"-20	⅜"-18	½"-16	⅝"-13	¾"-11	1"-10
Rec.Torque Ft/Lbs (N·m)	6 (8)	11 (15)	19 (26)	50 (68)	100 (136)	125 (170)
Max Torque Ft/Lbs (N·m)	7 (9)	15 (20)	25 (34)	70 (95)	125 (170)	135 (183)



DESIGN LOAD

Load tables and charts are constructed to be in accordance with the SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS 2001 EDITION published by the AMERICAN IRON AND STEEL INSTITUTE USING ASD METHOD.




Type of Load	Safety Factor to Yield Strength	Safety Factor to Ultimate Strength
Beam Loads	1.67	2.0
Column Load	1.80	2.2






















Telestrut Telescoping Tubing

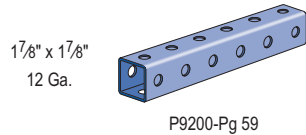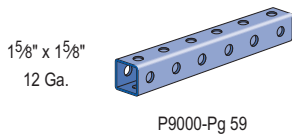
































Special Fittings and Connection Hardware for Telestrut Telescoping Tubing













Standard 1 5/8" Metal Framing – Flat Plate Fittings














Standard 1 5/8" Metal Framing – Ninety Degree Fittings



Standard 1 5/8" Metal Framing – "Z" and "U" Shape Fittings




Standard 1 5/8" Metal Framing – Wing Shape Fittings



1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index


Standard 1 5/8" Metal Framing – Wing Shape Fittings

Standard 1 5/8" Metal Framing – Misc. Fittings

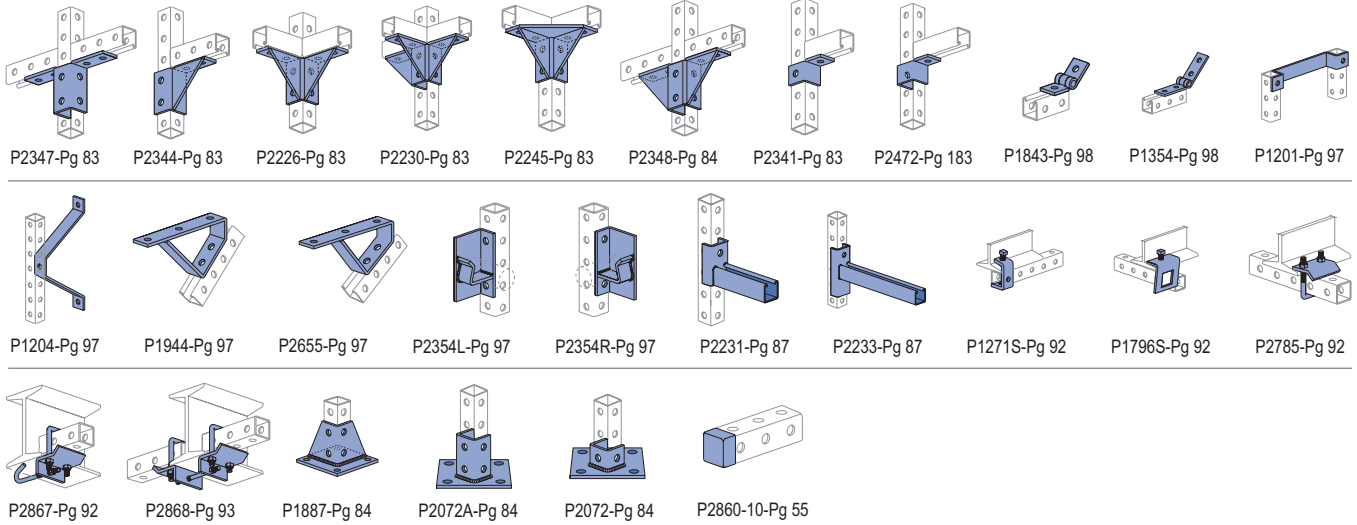


Many of the standard metal framing components are compatible with the Telestrut telescoping tubing. Refer to the appropriate page in other sections of the catalog for information on the particular fittings shown here.

P9000

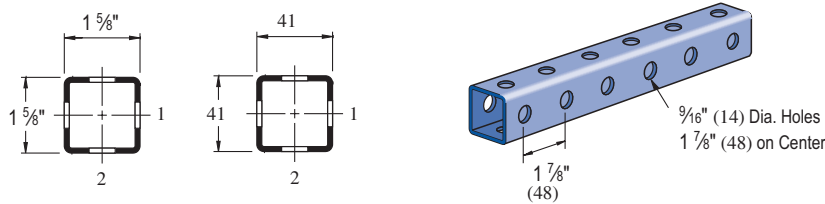

Wt/100 Ft: 188 Lbs (279 kg/100 m)
Allowable Moment 5,140 In-Lbs (580 N·m)
12 Gauge Nominal Thickness .105" (2.7mm)


P9200

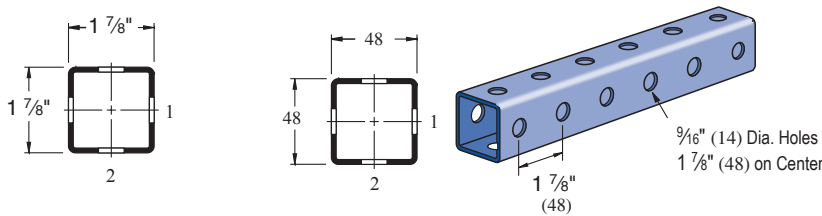

Wt/100 Ft: 223 Lbs (331 kg/100 m)
Allowable Moment 7,480 In-Lbs (850 N·m)
12 Gauge Nominal Thickness .105" (2.7mm)

TELESTRUT'S TELESCOPING POWER

Telestrut can be combined with metal framing channel

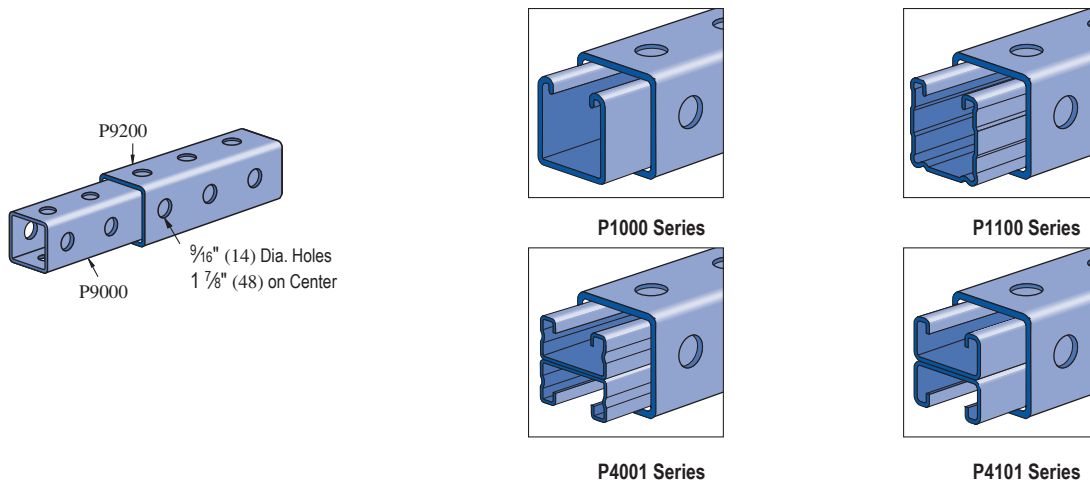



P9000 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,710	0.06	1,710	1,710	1,710
36	1,140	0.14	1,140	1,140	810
48	860	0.25	860	680	450
60	690	0.40	580	440	290
72	570	0.57	400	300	200
84	490	0.77	300	220	150
96	430	1.01	230	170	110
108	380	1.27	180	130	90
120	340	1.56	150	110	70
144	290	2.30	100	80	50
168	240	3.02	70	60	40
192	210	3.95	60	40	NR
216	190	5.09	40	NR	NR
240	170	6.24	40	NR	NR

P9200 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	2,490	0.05	2,490	2,490	2,490
36	1,660	0.12	1,660	1,660	1,350
48	1,250	0.22	1,250	1,140	760
60	1,000	0.34	980	730	490
72	830	0.49	680	510	340
84	710	0.67	500	370	250
96	620	0.87	380	290	190
108	550	1.10	300	230	150
120	500	1.37	240	180	120
144	420	1.98	170	130	80
168	360	2.70	120	90	60
192	310	3.47	100	70	50
216	280	4.47	80	60	NR
240	250	5.47	60	50	NR

P9000 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	3,640	8,730	8,570	8,330	8,040
36	3,540	8,360	8,040	7,530	6,950
48	3,400	7,880	7,340	6,530	5,660
60	3,210	7,290	6,530	5,440	4,360
72	2,990	6,640	5,660	4,360	3,160
84	2,730	5,940	4,790	3,340	2,320
96	2,430	5,220	3,940	2,560	1,780
108	2,110	4,520	3,160	2,020	1,400
120	1,820	3,840	2,560	1,640	**
144	1,390	2,690	1,780	**	**

P9200 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	4,620	11,120	10,980	10,740	10,460
36	4,530	10,770	10,460	9,950	9,370
48	4,390	10,300	9,760	8,940	8,030
60	4,220	9,720	8,940	7,800	6,590
72	4,000	9,050	8,030	6,590	5,180
84	3,750	8,320	7,080	5,410	3,890
96	3,460	7,560	6,110	4,290	2,980
108	3,140	6,770	5,180	3,390	2,360
120	2,790	5,990	4,290	2,750	1,910
144	2,170	4,510	2,980	1,910	**
168	1,720	3,320	2,190	**	**

P9000/P9200 - ELEMENTS OF SECTION

Parameter	P9000		P9200	
Area of Section	0.387	In ²	0.489	In ²
Axis 1-1				
Moment of Inertia (I)	0.166	In ⁴	0.279	In ⁴
Section Modulus (S)	0.205	In ³	0.297	In ³
Radius of Gyration (r)	0.655	In	0.755	In
Axis 2-2				
Moment of Inertia (I)	0.166	In ⁴	0.279	In ⁴
Section Modulus (S)	0.205	In ³	0.297	In ³
Radius of Gyration (r)	0.655	In	0.755	In

NR = Not Recommended.

** $KL/r > 200$

- Notes:
1. Above loads include the weight of the member. This must be deducted to arrive at the net allowable load the beam will support.
 2. Long span beams should be supported in such a manner as to prevent rotation and twist.
 3. Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/8" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P9000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	7.7	2	7.7	7.7	7.7
750	6.2	2	6.2	6.2	5.3
1,000	4.7	4	4.7	4.5	3.0
1,250	3.7	7	3.7	2.9	1.9
1,500	3.1	10	2.7	2.0	1.3
1,750	2.7	13	2.0	1.5	1.0
2,000	2.3	17	1.5	1.1	0.8
2,500	1.9	27	1.0	0.7	0.5
3,000	1.6	39	0.7	0.5	0.3
3,500	1.3	53	0.5	0.4	0.3
4,000	1.2	68	0.4	0.3	0.2
4,500	1.0	86	0.3	0.2	0.1
5,000	0.9	108	0.2	0.2	NR
6,000	0.8	151	0.2	NR	NR

P9200 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	11.3	1	11.3	11.3	11.3
750	9.0	2	9.0	9.0	8.9
1,000	6.8	4	6.8	6.8	5.0
1,250	5.4	6	5.4	4.8	3.2
1,500	4.5	8	4.5	3.3	2.2
1,750	3.9	11	3.3	2.4	1.6
2,000	3.4	15	2.5	1.9	1.2
2,500	2.7	23	1.6	1.2	0.8
3,000	2.3	34	1.1	0.8	0.6
3,500	1.9	45	0.8	0.6	0.4
4,000	1.7	60	0.6	0.5	0.3
4,500	1.5	76	0.5	0.4	0.3
5,000	1.3	92	0.4	0.3	0.2
6,000	1.1	132	0.3	0.2	NR

P9000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	16.2	38.9	38.2	37.1	35.9
750	16.0	38.2	37.1	35.5	33.7
1,000	15.6	36.7	35.0	32.3	29.4
1,250	15.0	34.8	32.3	28.6	24.6
1,500	14.4	32.6	29.4	24.6	19.8
1,750	13.6	30.3	26.2	20.6	15.3
2,000	12.7	27.8	23.0	16.8	11.7
2,250	11.7	25.2	19.8	13.3	9.3
2,500	10.5	22.6	16.8	10.8	7.5
2,750	9.3	20.0	14.0	8.9	6.2

P9200 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	20.6	49.5	48.9	47.9	46.6
750	20.4	48.8	47.9	46.3	44.4
1,000	20.0	47.4	45.7	43.1	40.1
1,250	19.5	45.6	43.1	39.3	35.1
1,500	18.8	43.5	40.1	35.1	29.9
1,750	18.1	41.1	36.8	30.7	24.6
2,000	17.2	38.5	33.4	26.3	19.7
2,250	16.2	35.7	29.9	22.1	15.6
2,500	15.1	32.9	26.3	18.2	12.6
2,750	13.9	30.1	23.0	15.0	10.4

P9000/P9200 - ELEMENTS OF SECTION (METRIC)

Parameter	P9000	P9200
Area of Section	2.50 cm ²	3.16 cm ²
Axis 1-1		
Moment of Inertia (I)	6.92 cm ⁴	11.61 cm ⁴
Section Modulus (S)	3.35 cm ³	4.87 cm ³
Radius of Gyration (r)	1.66 cm	1.92 cm
Axis 2-2		
Moment of Inertia (I)	6.92 cm ⁴	11.61 cm ⁴
Section Modulus (S)	3.35 cm ³	4.87 cm ³
Radius of Gyration (r)	1.66 cm	1.92 cm


NR = Not Recommended.

- Notes:
1. Above loads include the weight of the member. This must be deducted to arrive at the net allowable load the beam will support.
 2. Long span beams should be supported in such a manner as to prevent rotation and twist.
 3. Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.



P9010


MULTI-GRIP RIVET

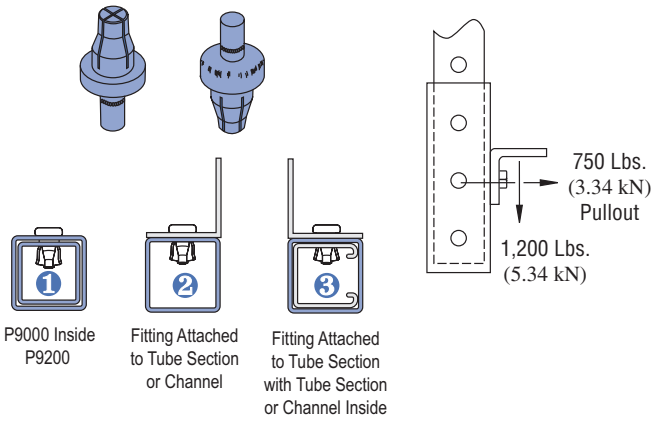

Wt/100 pcs: 10 Lbs (4.5 kg)

P9209


GRAVITY PIN




Wt/100 pcs: 47 Lbs (21.3 kg)

P9207

CUTTING ALIGNMENT GAUGE

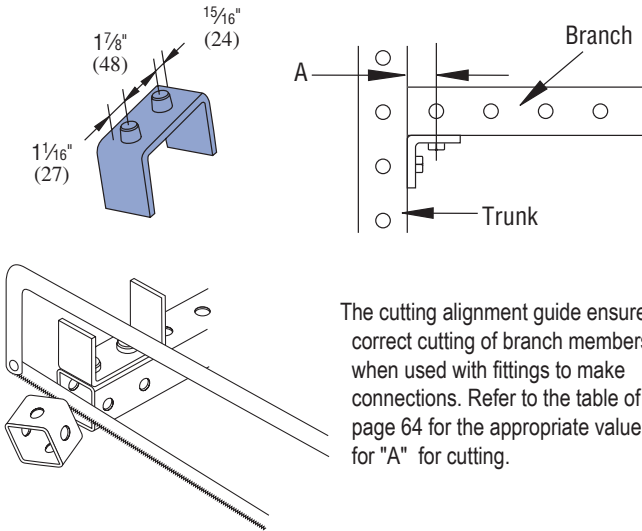


P9324

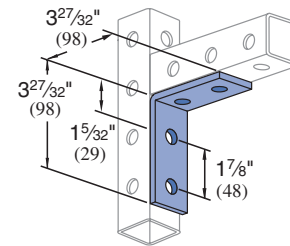


Wt/100 pcs: 78 Lbs (35.0 kg)

P9011

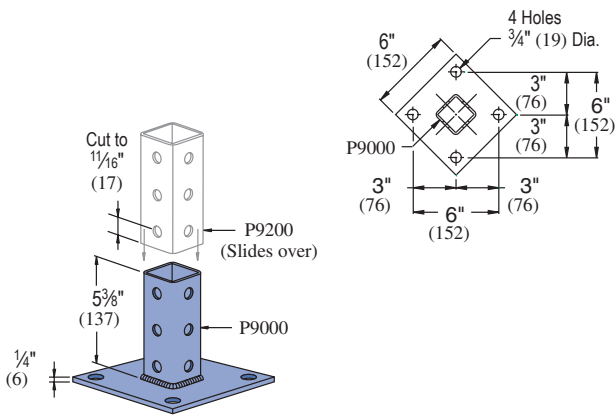

Wt/100 pcs: 332 Lbs (150.7 kg)

P9012

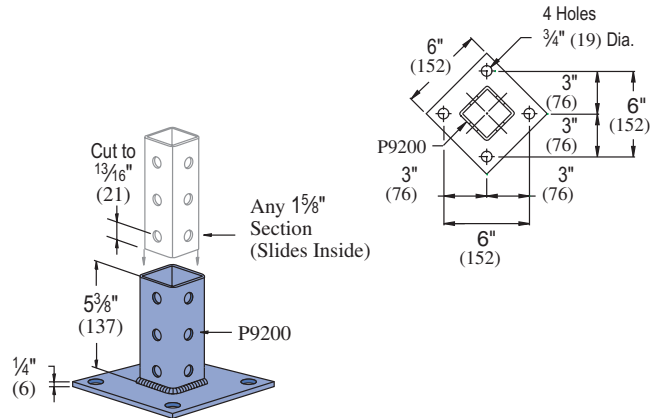


Wt/100 pcs: 340 Lbs (154 kg)

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)


Hole Diameter: 3/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)

P9014

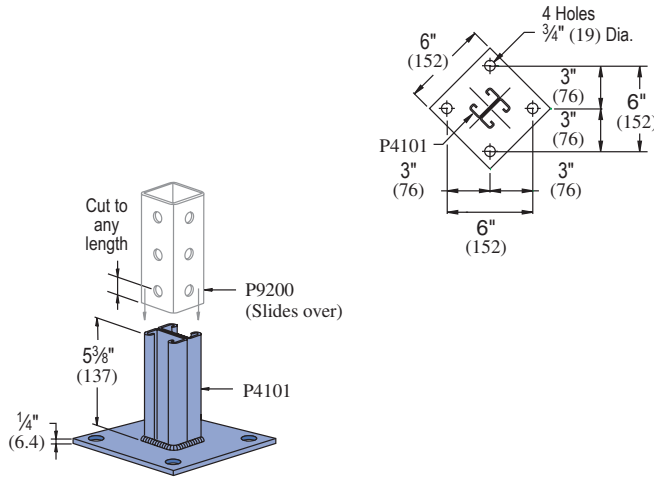


Wt/100 pcs: 303 Lbs (137.5 kg)

PREFERRED THREE-PIECE ASSEMBLY

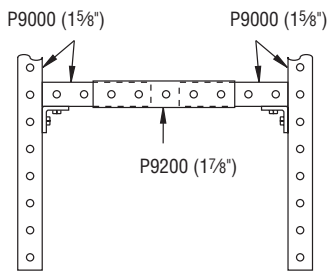

In most applications, telescoping assemblies should be made from three sections of Telestrut material. The simplest construction utilizes a center section of 1 7/8" material (P9200) into which a 1 5/8" member (P9000) is telescoped from each end. In this way, all intersecting verticals and horizontals are formed from 1 5/8" members assuring maximum compatibility and ease of assembly


TWO-PIECE ASSEMBLY

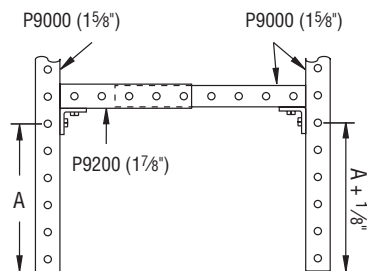

Two-piece telescoping assemblies can be used, but special cutting of one or both telescoping members is needed to achieve proper alignment of fittings at the intersecting connections.


In addition, the right-angle members to which telescoping pieces are attached must be cut according to the illustration at right to insure smooth movement of telescoping members.

P9013

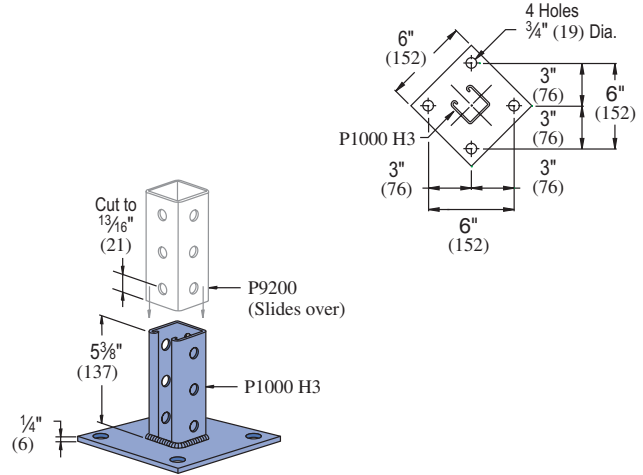


Wt/100 pcs: 318 Lbs (144.7 kg)

ALTERNATE THREE-PIECE ASSEMBLY

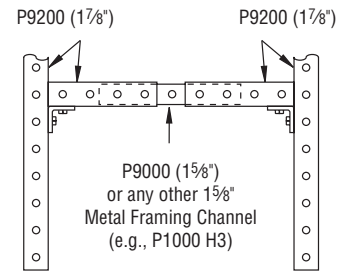


A similar technique is to use a center 1 5/8" center member (P9000) which can be telescoped into 1 7/8" members used at both ends. With this method, all intersecting connections should be formed from compatible 1 7/8" members.

CHANNEL NUT CONNECTION – INFINITE ADJUSTMENT

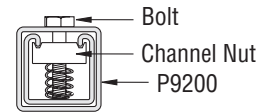

Any of the 1 5/8" (41 mm) channel can be connected to the P9000 using standard channel nuts.

THROUGH-BOLT CONNECTION – INCREMENTAL ADJUSTMENT

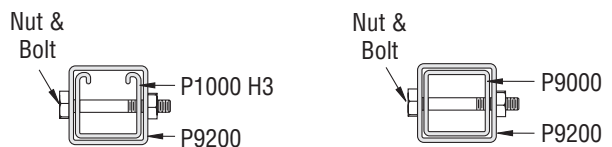

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1 1/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




CUTTING CHART

Fitting	1 5/8" (41.3) Branch		1 7/8" (47.6) Branch	
	Trunk 1 5/8" (41.3)	Trunk 1 7/8" (47.6)	Trunk 1 5/8" (41.3)	Trunk 1 7/8" (47.6)
P1026	A	A	A	B
P1028	A	A	A	B
P1029	†	†	†	†
P1031	A	A	A	B
P1033	B	A	A	B
P1034	†	†	†	†
P1035	A	†	†	†
P1036	A	A	A	B
P1037	†	†	†	†
P1038	†	†	†	†
P1045	†	†	†	†
P1047	†	†	†	†
P1048	†	†	†	†
P1049	†	†	†	†
P1050	†	†	†	†
P1065	A	A	A	B
P1066	A	A	A	B
P1068	C	NR	NR	NR
P1130	A	A	A	C
P1131	A	A	A	C
P1290	A	NR	NR	NR
P1291	A	NR	NR	NR
P1325	A	NR	NR	NR
P1326	C	NR	NR	NR
P1334	A	A	A	B
P1346	A	A	A	B
P1347	C	NR	NR	NR
P1354	D	D	D	D
P1356	A	A	A	B
P1357	A	NR	NR	NR
P1358	A	A	A	B
P1359	A	NR	NR	NR
P1380	A	A	A	B
P1380 A	A	A	A	B
P1381	†	†	†	†
P1382	†	†	†	†
P1458	A	NR	NR	NR
P1498	†	†	†	†
P1499	†	†	†	†
P1538 A	C	A	A	C
P1538 B	C	A	A	C
P1538 C	C	A	A	C
P1538 D	C	A	A	C
P1579	A	NR	NR	NR
P1713	†	†	†	†

Fitting	1 5/8" (41.3) Branch		1 7/8" (47.6) Branch	
	Trunk 1 5/8" (41.3)	Trunk 1 7/8" (47.6)	Trunk 1 5/8" (41.3)	Trunk 1 7/8" (47.6)
P1726	A	A	A	B
P1727	B	NR	NR	NR
P1728	†	†	†	†
P1747	†	†	†	†
P1750	†	†	†	†
P1821	†	†	†	†
P1822	†	†	†	†
P1823	†	†	†	†
P1843	D	D	D	D
P1873	†	†	†	†
P1834	†	NR	NR	NR
P1941	A	A	A	B
P1950	A	A	A	B
P1953	A	A	A	B
P1956	†	†	†	†
P1957	†	†	†	†
P2223	A	NR	A	NR
P2224	A	NR	A	NR
P2225	A	NR	A	NR
P2226	A	NR	A	NR
P2227	A	NR	A	NR
P2228	A	NR	A	NR
P2229	A	NR	A	NR
P2230	A	NR	A	NR
P2235	A	NR	NR	NR
P2245	A	NR	A	NR
P2324	E	NR	NR	F
P2325	E	A	A	F
P2326	E	NR	NR	F
P2341 R-L	A	NR	A	NR
P2343 R-L	A	NR	A	NR
P2344 R-L	A	NR	A	NR
P2345	A	NR	A	NR
P2346	A	NR	A	NR
P2347	A	NR	A	NR
P2348	A	NR	A	NR
P2472 R-L	C	NR	A	NR
P2815	C	NR	NR	NR
P2815 D	C	NR	NR	NR
P9324	G	G	G	G
P9325	A	A	A	A
P9484	A	A	A	A

This table shows the value for "A" when using the specified fitting to connect the branch and trunk. Sizes "A" and "B" can be cut with the cutting alignment gauge (P9207). Other sizes require special cutting. Those marked NR are not recommended.

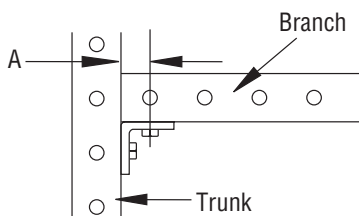


Legend

Designator	"A" In (mm)
A	1 1/16" / 27
B	1 5/16" / 24
C	1 3/16" / 21
D	1 1/4" / 32
E	5/8" * / 16

Designator	"A" In (mm)
F	7/16" * / 11
G	1 5/32" / 27
NR	Not Recommended
†	Special Cutting Req'd (See part dwg)

Channel Nuts With Springs	67
Channel Nuts Without Springs	67
Top Retainer Nuts	67
Stud Nuts	68
Hardware	68-70

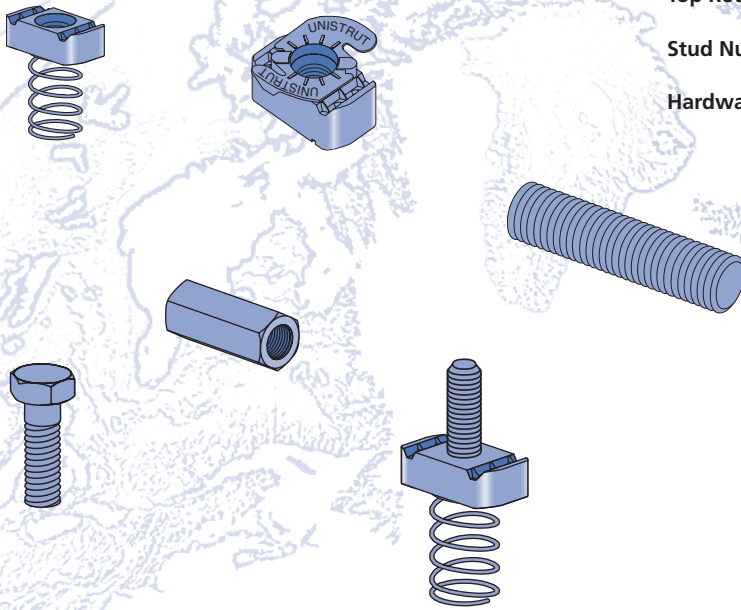

MATERIAL

Unistrut channel nuts are manufactured from mild steel bars, and after machining operations are completed, they are case hardened, assuring positive biting action into the inturned edge of the Unistrut channel.

Bolt Size	Channel Nut ASTM
1/4" & 5/16"	A1011 SS GR45
3/8", 7/16" & 1/2"	A576 GR1015 Modified
5/8" & 3/4"	A36 or A675 GR60
7/8"	A36

FINISHES

Nuts, bolts and washers are electro-galvanized (EG), ASTM B633 Type III SC1 finish, unless otherwise noted.

Many hardware items are also available in stainless steel. Consult factory for ordering information.

THREADS

All threads on the nuts and bolts are Unified and American coarse screw threads.

DESIGN BOLT TORQUE

BOLT SIZE	1/4"-20	5/16"-18	3/8"-16	1/2"-13	5/8"-11	3/4"-10
Rec.Torque Ft/Lbs (<i>N·m</i>)	6 (8)	11 (15)	19 (26)	50 (68)	100 (136)	125 (170)
Max Torque Ft/Lbs (<i>N·m</i>)	7 (9)	15 (20)	25 (34)	70 (95)	125 (170)	135 (183)

DIMENSIONS


Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted.

Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.


Many Unistrut nuts, bolts and hardware items are also available in standard metric dimensions. Consult factory for ordering information.



Channel Nuts With Spring



P1006 - P1010
Pg 67



P1012S - P1024S
Pg 67




P4006 - P4010
Pg 67



P4012S - P4023S
Pg 67



P5506 - P5510
Pg 67



P2378 - P2382
Pg 68

Channel Nuts Without Spring



P3016
Pg 67



P3006 - P3013
Pg 67




P1012 - P1024
Pg 67



P4012 - P4023
Pg 67



P1006T - P1010T, P4010T
Pg 67



P4908
Pg 67



P1016
Pg 67

Hardware



HHCS
Pg 68



HFMS
Pg 68



HRMS
Pg 68



HSHS
Pg 68



HCSS
Pg 68



HSQN
Pg 69




HHXN
Pg 69




HFLW
Pg 69



HLKW
Pg 69



HOCW
Pg 70



HTHR
Pg 69




HRCN
Pg 69



P2486
Pg 70



P2485
Pg 70



K1062 - K1064
Pg 70

MAXIMUM ALLOWABLE PULL-OUT AND SLIP LOADS

Channel	Channel Nut Size-Thread	Gauge	Allowable Pull-Out Strength Lbs (kN)	Resistance to Slip Lbs (kN)	Torque Ft-Lbs (N·m)
P1000 P3000 P5000 P5500	3/4" - 10	12	2,500	1,700	*125
			11.12	7.56	170
	5/8" - 11	12	2,500	1,500	*100
			11.12	6.67	135
	1/2" - 13	12	2,000	1,500	50
			8.90	6.67	70
	7/16" - 14	12	1,400	1,000	35
			6.23	4.45	50
3/8" - 16	12	1,000	800	19	
		4.45	3.56	25	
5/16" - 18	12	800	500	11	
		3.56	2.22	15	
1/4" - 20	12	600	300	6	
		2.67	1.33	8	
P3300	1/2" - 13	12	1,500	1,500	50
			6.67	6.67	70
	3/8" - 16	12	1,000	800	19
			4.45	3.56	25
5/16" - 18	12	800	500	11	
		3.56	2.22	15	
1/4" - 20	12	600	300	6	
		2.67	1.33	8	






Channel	Channel Nut Size-Thread	Gauge	Allowable Pull-Out Strength Lbs (kN)	Resistance to Slip Lbs (kN)	Torque Ft-Lbs (N·m)
P1100 & P4100	1/2" - 13	14	1,400	1,000	50
			6.23	4.45	70
	3/8" - 16	14	1,000	750	19
			4.45	3.34	25
	5/16" - 18	14	800	400	11
3.56			1.78	15	
1/4" - 20	14	600	300	6	
		2.67	1.33	8	
P2000 & P4000	1/2" - 13	16	1,000	1,000	50
			4.45	4.54	70
	3/8" - 16	16	1,000	750	19
			4.45	3.34	25
	5/16" - 18	16	800	400	11
3.56			1.78	15	
1/4" - 20	16	600	300	6	
		2.67	1.33	8	

* May require 3/8" or 1/2" thick fitting.








Nut design loads include a minimum safety factor of 3.

Note: Refer to the Channel Nut Selection Chart on the following two pages for the part number.

CHANNEL NUT WITH SPRING


	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P1006-0832	#8 -32	7 (3.2)	P1000, P1100, P2000, P3000
P1006-1024	#10 -24	7 (3.2)		
P1006-1420	¼" -20	7 (3.2)		
P1007	⅝" -18	6 (2.7)		
P1008	⅜" -16	10 (4.5)		
P1009	⅞" -14	9 (4.1)		
P1010	½" -13	12 (5.4)		
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P1012S	⅝" -11	21 (9.5)	P1000, P1100, P2000, P3000
P1023S	¾" -10	21 (9.5)		
P1024S	⅞" -9	21 (9.5)		
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P4006-0832	#8 -32	7 (3.2)	P3300, P4000, P4100
P4006-1024	#10 -24	7 (3.2)		
P4006-1420	¼" -20	7 (3.2)		
P4007	⅝" -18	6 (2.7)		
P4008	⅜" -16	9 (4.1)		
P4009	⅞" -14	9 (4.1)		
P4010	½" -13	8 (3.6)		
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P4012S	⅝" -11	10 (4.5)	P3300, P4000, P4100
P4023S	¾" -10	10 (4.5)		
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P5506-0832	#8 -32	7 (3.2)	P5500
P5506-1024	#10 -24	7 (3.2)		
P5506-1420	¼" -20	7 (3.2)		
P5507	⅝" -18	6 (2.7)		
P5508	⅜" -16	10 (4.5)		
P5509	⅞" -14	10 (4.5)		
P5510	½" -13	12 (5.4)		

CHANNEL NUT WITHOUT SPRING

	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P3016-0632	#6 -32	2 (0.9)	Any Channel
P3016-0832	#8 -32	2 (0.9)		
P3016-1024	#10 -24	4 (1.8)		
P3016-1420	¼" -20	4 (1.8)		
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P3006-0832	#8 -32	6 (2.7)	Any Channel
P3006-1024	#10 -24	6 (2.7)		
P3006-1420	¼" -20	6 (2.7)		
P3007	⅝" -18	6 (2.7)		
P3008	⅜" -16	9 (4.1)		
P3009	⅞" -14	9 (4.1)		
P3010	½" -13	11 (5.0)	Any Channel Except P3300, P4000, P4100	
P3013	½" -13	8 (3.6)	P3300, P4000 P4100	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P1012	⅝" -11	20 (9.1)	Any Channel Except P3300, P4000, P4100
P1023	¾" -10	20 (9.1)		
P1024	⅞" -9	20 (9.1)		
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P4012	⅝" -11	11 (5.0)	P3300, P4000 P4100
P4023	¾" -10	11 (5.0)		
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P1006T1420	¼" -20	7 (3.2)	Any Channel
P1008T	⅜" -16	10 (4.5)		
P1010T	½" -13	12 (5.4)	Any Channel Except P3300, P4000, P4100	
P4010T	½" -13	8 (3.6)	P3300, P4000 P4100	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P4908	⅝" -16	17.5 (7.9)	Any Channel
Double Conveyor Adjusting Nut				
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	P1016	⅝" -16	17.5 (7.9)	Any Slotted Channel
Missing Link Multi-Purpose Strut Fastener				



CHANNEL STUD NUT WITH SPRING




All Stud Nut grooves are serrated.

Special stud lengths and thread lengths can be supplied upon request.

Part No.	Thread	"A" Stud In (mm)	Wt/100 pcs Lbs (kg)	Use With P1000, P1100, P2000, P3000
P2378-1	¼" - 20	1 (25)	8 (3.6)	
P2378-2		1¼ (31)	9 (4.1)	
P2378-3		1½ (38)	9 (4.1)	
P2379-1	⅝" - 18	1 (25)	12 (5.4)	
P2379-2		1¼ (32)	12 (5.4)	
P2379-3		1½ (38)	13 (5.9)	
P2380-1	⅜" - 16	1 (25)	13 (5.9)	
P2380-2		1¼ (32)	13 (5.9)	
P2380-3		1½ (38)	13 (5.9)	
P2380-4		1¾ (45)	15 (6.8)	

Part No.	Thread	"A" Stud In (mm)	Wt/100 pcs Lbs (kg)	Use With P1000, P1100, P2000, P3000
P2380-5	⅜" - 16	2 (51)	16 (7.3)	
P2380-6		2¼ (57)	16 (7.3)	
P2381-2	½" - 13	1 (25)	14 (6.4)	
P2381-3		1¼ (32)	15 (6.8)	
P2381-4		1½ (38)	17 (7.7)	
P2381-5		1¾ (45)	18 (8.2)	
P2381-6	2 (51)	19 (8.6)		
P2381-7		2¼ (57)	20 (9.1)	
P2382-2	⅝" - 11	1¼ (32)	18 (8.2)	
P2382-3		1½ (38)	20 (9.1)	

HEX HEAD CAP SCREWS



Part No.	Size	Wt/100 pcs Lbs (kg)
HHCS025044EG	¼" x 7/16"	1.0 (0.5)
HHCS025075EG	¼" x ¾"	1.3 (0.6)
HHCS025150EG	¼" x 1½"	2.6 (1.2)
HHCS031125EG	⅝" x 1¼"	3.6 (1.6)
HHCS037075EG	⅜" x ¾"	4.0 (1.8)
HHCS037087EG	⅜" x 7/8"	4.4 (2.0)
HHCS037100EG	⅜" x 1"	4.5 (2.0)
HHCS037125EG	⅜" x 1¼"	5.3 (2.4)
HHCS037150EG	⅜" x 1½"	6.0 (2.7)
HHCS037200EG	⅜" x 2"	7.6 (3.4)
HHCS037225EG	⅜" x 2¼"	8.4 (3.8)
HHCS037250EG	⅜" x 2½"	9.2 (4.2)
HHCS050094EG	½" x 15/16"	9.1 (4.2)
HHCS050119EG	½" x 1¾"	10.2 (4.6)
HHCS050150EG	½" x 1½"	11.6 (5.3)
HHCS050175EG	½" x 1¾"	13.1 (5.9)
HHCS050200EG	½" x 2"	14.6 (6.6)
HHCS050225EG	½" x 2¼"	16 (7.3)
HHCS050250EG	½" x 2½"	17.5 (7.9)

HEX SLOTTED MACHINE SCREWS



Part No.	Size	Wt/100 pcs Lbs (kg)
HSHS025050EG	¼" x ½"	1.4 (0.6)
HSHS025062EG	¼" x ⅝"	1.5 (0.7)
HSHS025075EG	¼" x ¾"	1.7 (0.8)
HSHS031100EG	⅝" x 1"	2.6 (1.2)
HSHS031125EG	⅝" x 1¼"	3.0 (1.4)
HSHS031150EG	⅝" x 1½"	3.4 (1.5)
HSHS037125EG	⅜" x 1¼"	5.3 (2.4)

FLAT HEAD MACHINE SCREWS



Part No.	Size	Wt/100 pcs Lbs (kg)
HFMS025062EG	¼" x ⅝"	1.2 (0.5)
HFMS031100EG	⅝" x 1"	2.6 (1.2)
HFMS050100EG	½" x 1"	9.3 (4.2)

CONE POINT SET SCREWS



Part No.	Size	Wt/100 pcs Lbs (kg)
HCSS025100EG	¼" x 1"	2.8 (1.3)
HCSS031150EG	⅝" x 1½"	3.9 (1.8)
HCSS037150EG	⅜" x 1½"	4.5 (2.0)
HCSS037200EG	⅜" x 2"	6.1 (2.8)
HCSS050150EG	½" x 1½"	8.5 (3.9)
HCSS050200EG	½" x 2"	11.4 (5.2)
HCSS062150EG	⅝" x 1½"	14.5 (6.6)
HCSS062200EG	⅝" x 2"	23.0 (10.4)

ROUND HEAD MACHINE SCREWS



Part No.	Size	Wt/100 pcs Lbs (kg)
HRMS025050EG	¼" x ½"	1 (0.5)
HRMS025075EG	¼" x ¾"	1.2 (0.6)
HRMS025100EG	¼" x 1"	1.5 (0.7)
HRMS031100EG	⅝" x 1"	2.6 (1.2)
HRMS031125EG	⅝" x 1¼"	3.0 (1.4)
HRMS037100EG	⅜" x 1"	4.1 (1.9)
HRMS037125EG	⅜" x 1¼"	4.7 (2.1)
HRMS037150EG	⅜" x 1½"	5.3 (2.4)

15/16" Channel
 Telesit System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

SQUARE NUTS



Part No.	Size	Wt/100 pcs Lbs (kg)
HSQN025EG	1/4"	0.9 (0.4)
HSQN031EG	5/16"	1.6 (0.7)
HSQN037EG	3/8"	2.7 (1.2)
HSQN050EG	1/2"	5.8 (2.6)
HSQN062EG	5/8"	10.7 (4.9)
HSQN075EG	3/4"	15.4 (6.9)
HSQN087EG	7/8"	24.9 (11.3)
HSQN100EG	1"	36.3 (16.5)

HEXAGON NUTS




Part No.	Size	Wt/100 pcs Lbs(kg)
HHXN025EG	1/4"	0.6 (0.3)
HHXN031EG	5/16"	1.2 (0.5)
HHXN037EG	3/8"	1.6 (0.7)
HHXN050EG	1/2"	4.8 (2.2)
HHXN062EG	5/8"	7.3 (3.3)
HHXN075EG	3/4"	11.9 (5.4)
HHXN087EG	7/8"	19.0 (8.6)
HHXN100EG	1"	28.3 (12.8)

FLAT WASHERS



Part No.	Size	Wt/100 pcs Lbs(kg)
HFLW025EG	1/4"	0.8 (0.4)
HFLW031EG	5/16"	1.0 (0.5)
HFLW037EG	3/8"	1.5 (0.7)
HFLW050EG	1/2"	3.5 (1.6)
HFLW062EG	5/8"	7.7 (3.5)
HFLW075EG	3/4"	11.0 (5.0)
HFLW087EG	7/8"	15.3 (6.9)
HFLW100EG	1"	18.8 (8.5)

STEEL THREADED ROD

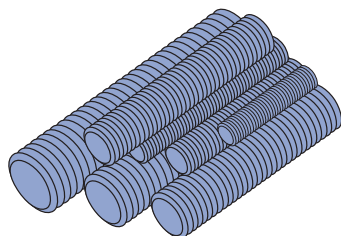

Standard Length 12' (3.7m)

Low Carbon Steel
 F_y = 32,000 psi minimum
 F_t = 52,000 psi minimum

Part No.	Size	Wt/100 Ft. Lbs (kg)
HTHR025	1/4" x 20	13 (5.9)
HTHR031	5/16" x 18	20 (9.1)
HTHR037	3/8" x 16	30 (13.6)
HTHR044	7/16" x 14	30 (13.6)
HTHR050	1/2" x 13	53 (24.0)
HTHR062	5/8" x 11	84 (38.1)
HTHR075	3/4" x 10	124 (56.2)
HTHR087	7/8" x 9	170 (77.1)
HTHR100	1" x 8	223 (101.2)

LOCK WASHERS




Part No.	Size	Wt/100 pcs Lbs (kg)
HLKW025EG	1/4"	0.25 (0.1)
HLKW031EG	5/16"	0.41 (0.2)
HLKW037EG	3/8"	0.63 (0.3)
HLKW050EG	1/2"	1.32 (0.60)
HLKW062EG	5/8"	2.20 (1.0)
HLKW075EG	3/4"	3.80 (1.7)
HLKW087EG	7/8"	6.00 (2.7)
HLKW100EG	1"	8.80 (4.0)

LOAD CARRYING CAPACITY OF THREADED HOT ROLLED STEEL
 CONFORMING TO ASTM A575 AND A576

Threaded Rod Loads for Piping Applications (based on MSS SP-58)		
Nominal Dia.	Root Area In ² (mm ²)	Max. Safe Load at 650°F (343°C) Lbs (kN)
3/8"	0.068 (43.9)	730 (3.25)
1/2"	0.126 (81.3)	1,350 (6.01)
5/8"	0.202 (130.3)	2,160 (9.61)
3/4"	0.302 (194.8)	3,230 (14.37)
7/8"	0.419 (270.3)	4,480 (19.93)
1"	0.552 (356.1)	5,900 (26.24)

Threaded Rod Loads for Structural Applications (Based on AISC, Steel Construction Manual, ASD, 9th Edition. Per AISC, Allowed Tensile Stress = 0.33 * F _u)		
Nominal Dia.	Nominal Area In ² (mm ²)	Allowed Tension Load Lbs (kN)
1/4"	0.049 (31.6)	840 (3.74)
3/8"	0.110 (71.0)	1,890 (8.41)
1/2"	0.150 (96.8)	2,570 (11.43)
3/4"	0.196 (126.5)	3,360 (14.95)
5/8"	0.307 (198.2)	5,260 (23.40)
3/4"	0.442 (285.4)	7,580 (33.72)
7/8"	0.601 (388.0)	10,310 (45.86)
1"	0.785 (506.8)	13,470 (59.92)



STEEL COUPLER NUTS



Part Number	Size	Length In (mm)	Wt/100 pcs Lbs (kg)
HRCN025	1/4" - 20	7/8" (22)	1.9 (0.9)
HRCN031	5/16" - 18	1 3/4" (45)	7.5 (3.4)
HRCN037	3/8" - 16	1 3/4" (45)	9.0 (4.1)
HRCN044	7/16" - 14	1 3/4" (45)	10.4 (4.7)
HRCN050	1/2" - 13	1 3/4" (45)	10.0 (4.5)
HRCN062	5/8" - 11	2 1/8" (54)	18.0 (8.2)
HRCN075	3/4" - 10	2 1/4" (57)	28.0 (12.7)
HRCN087	7/8" - 9	2 1/2" (64)	55.0 (24.9)
HRCN100	1" - 8	2 3/4" (70)	73.0 (33.1)




SLOT ADAPTER™




Part No.	Bolt Size	Wt/100 pcs Lbs (kg)
HOCW025	1/4" (6)	1 (0.5)
HOCW037	3/8" (10)	1.5 (0.7)

KWIK WASHER™





Overhead installation with one hand.
Available in zinc plated and hot dip galvanized

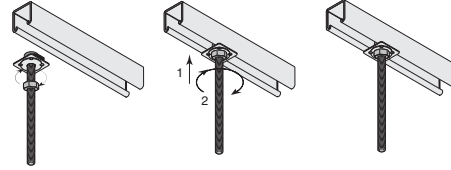

Part No.	Size In (mm)	Load Lbs (kN)	Wt/100 pcs Lbs (kg)
K1062	1/4" (6)	250 (1.1)	1.2 (0.5)
K1063	3/8" (10)	610 (2.7)	2.6 (1.2)
K1064	1/2" (13)	1,130 (5.0)	9.3 (4.2)

P2486


SEISMIC ROD STIFFENER

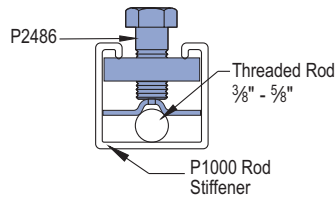



Wt/100 pcs: 16 Lbs (7.3 kg)

P2485

CRADLE CLIP



Cradle clip only, order other items separately.

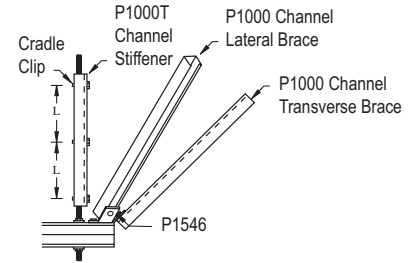

Wt/100 pcs: 3.0 Lbs (1.4 kg)

P2485 & P2486 – SPACING CHART

Rod Size In (mm)	Root Area In ² (mm ²)	Radius of Gyration In (mm)	Design Load Lbs (kN)Rod Stiffener Clip Spacing (L).....			
				Rod Stress @100% 10,700 PSI In (mm)	Rod Stress @75% 8,025 PSI In (mm)	Rod Stress @50% 5,350 PSI In (mm)	Rod Stress @35% 3,745 PSI In (mm)
3/8	0.068	0.074	730	9	11	13	15
10	49.5	1.99	3.6	229	279	330	381
1/2	0.126	0.100	1,350	12	14	17	21
12	72.4	2.40	5.3	305	356	432	533
5/8	0.202	0.127	2,160	15	18	22	26
16	138.3	3.32	10.2	381	457	559	660


Notes:

1. Minimum Tensile Stress is 50,000 psi (345MPa)
2. Working Stress is 10,700 psi (73.9 MPa) – Same as for Tension
3. Compression Will Only Occur During a Seismic Event
4. Compression Requires the Use of Rod Stiffeners
5. KL/r = 200 When Rod Stress is at 35%

Refer to seismic bracing systems catalog for more detailed information.



GENERAL FITTINGS

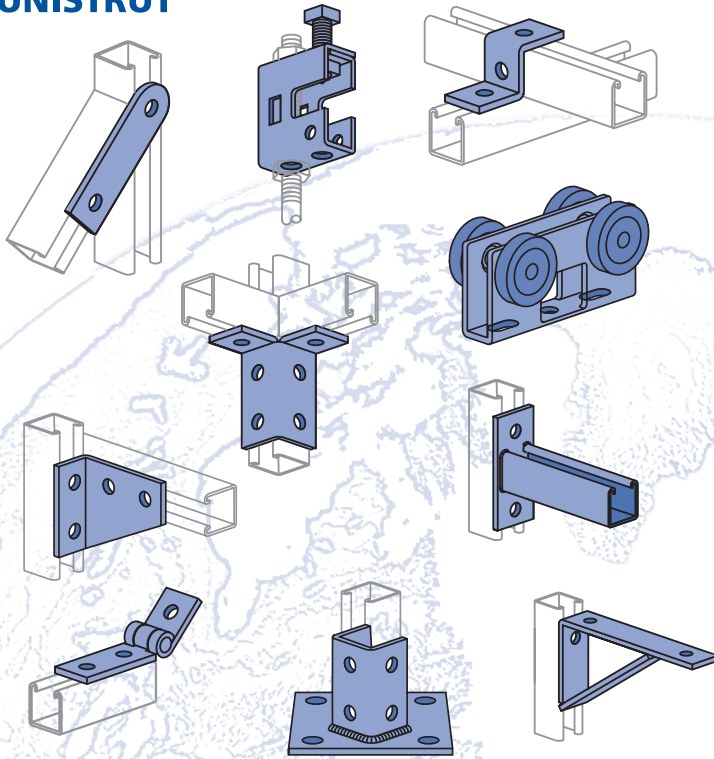

Flat Plate Fittings	75-76
Ninety Degree Fittings.....	76-79
Angular Fittings	79
"Z" Shape Fittings	80
"U" Shape Fittings	81-82
Wing Shape Fittings	82-84
Post Bases	84
Brackets	84-87
Brace Fittings.....	88
Beam Clamps.....	89-96
Trolleys.....	96
Special Application Fittings.....	97-98
Seismic Retrofit Fittings.....	98-100

MATERIAL

Fittings, unless noted, are made from hot-rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A575, A576, A635, or A36. The fitting steel also meets the physical requirements of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

Many fittings are also available in stainless steel, aluminum and fiberglass. Consult factory for ordering information.

FINISHES

Fittings are available in:

- Perma-Green III (GR),
- Electro-galvanized (EG), conforming to ASTM B633 Type III SC1;
- Hot-dipped galvanized (HG), conforming to ASTM A123 or A153 and
- Plain (PL).

APPLICATION

All parts drawings illustrate only one application of each fitting. In most cases many other applications are possible. The channels shown in the illustrations are P1000, 1 $\frac{1}{8}$ " square, except where noted otherwise.

All $\frac{9}{16}$ " diameter holes use $\frac{1}{2}$ " x $\frac{1}{16}$ " hex head cap screws and $\frac{1}{2}$ " nuts - P1010, P4010 or P5510 - depending on the channel used. Nuts and bolts are not included with the fitting and must be ordered separately.

DESIGN BOLT TORQUE

BOLT SIZE	1/4"-20	5/16"-18	3/8"-16	1/2"-13	5/8"-11	3/4"-10
Rec. Torque Ft/Lbs (N•m)	6 (8)	11 (15)	19 (26)	50 (68)	100 (136)	125 (170)
Max Torque Ft/Lbs (N•m)	7 (9)	15 (20)	25 (34)	70 (95)	125 (170)	135 (183)

SET SCREW TORQUE

BOLT SIZE	1/4"-20	5/16"-18	3/8"-16	1/2"-13	5/8"-11	3/4"-10
Set Screw Torque In/Lbs (N•m)	40 (4)	60 (7)	125 (14)	250 (28)	400 (45)	665 (75)

Note: Caution should be taken not to overtighten the set screw

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

DESIGN LOAD


Design load data, where shown, is based on the ultimate strength of the connection with a safety factor of 2.5, unless otherwise noted.

BEAM CLAMPS


Clamps are designed to be used with W, M, S and HP Shape beams, Standard C and Miscellaneous MC Channels, Angles and Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.




Flat Plate Fittings

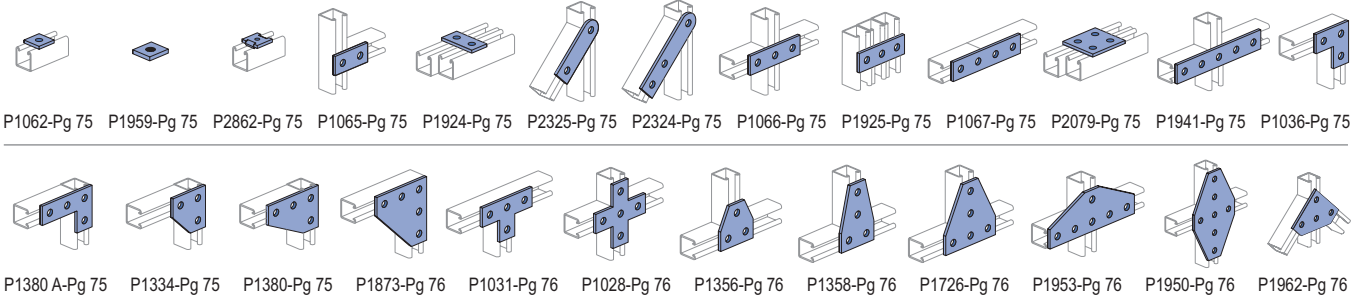


Angle Fittings

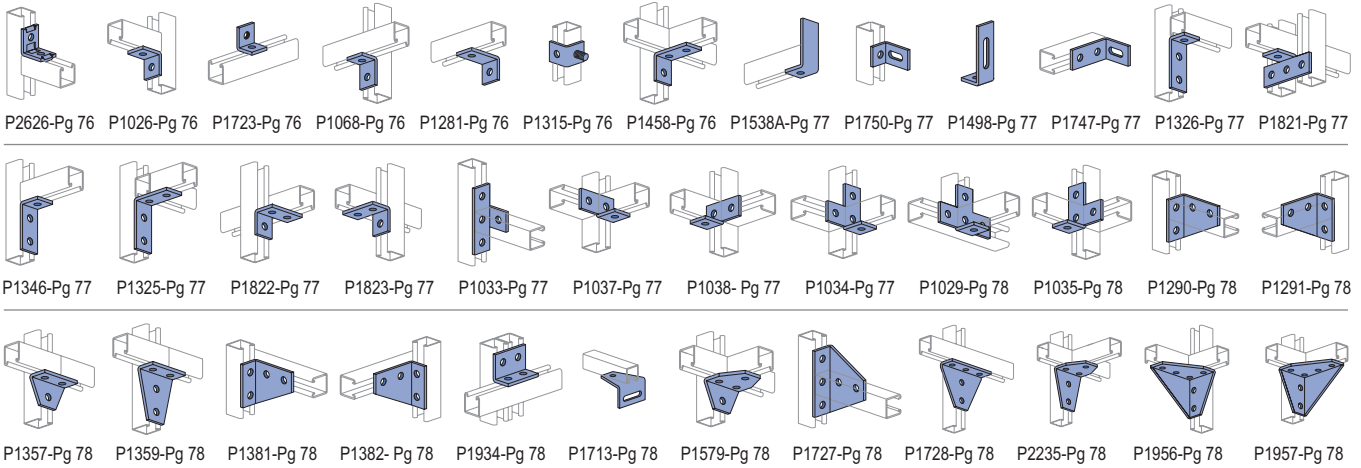

"Z" Shape Fittings

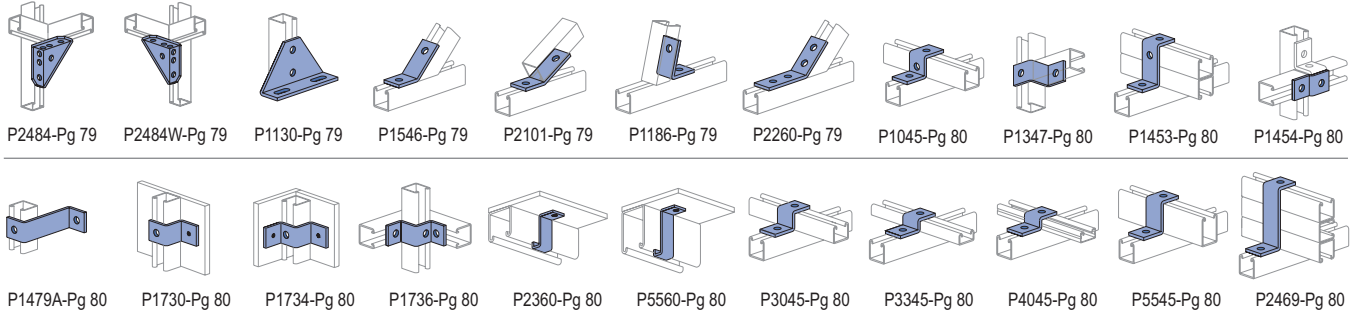

"U" Shape Fittings

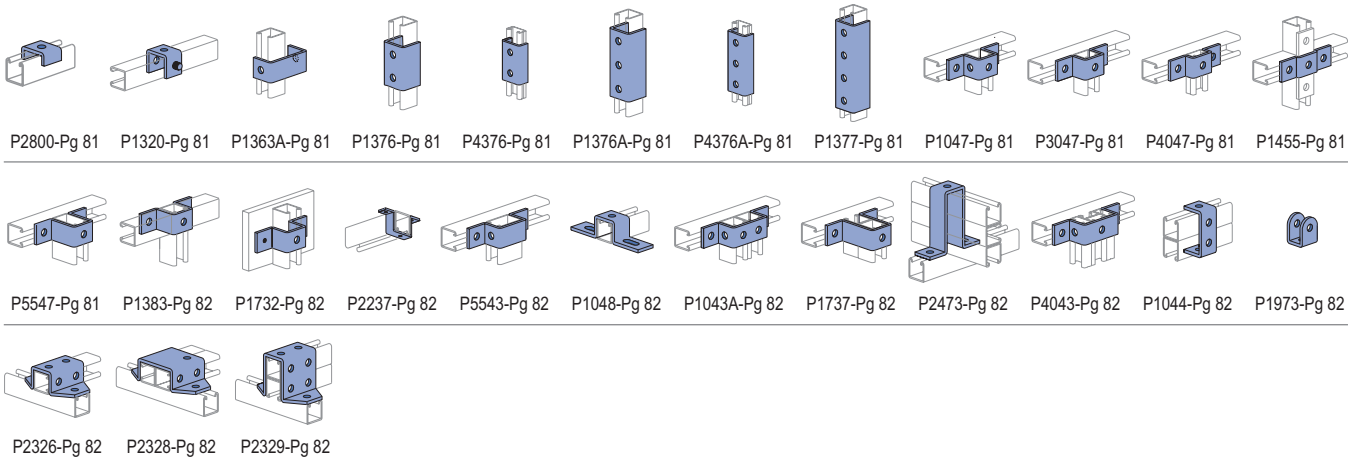

1 1/2" Channel
Telestrut System
Nuts & Hardware

General Fittings

Pipe/Conduit Supports

Electrical Fittings

Concrete Inserts

1 1/4" Framing System

1 3/16" Framing System


Fiberglass System

Special Metals

PrimeAngle System

Product Index


Wing Shape Fittings

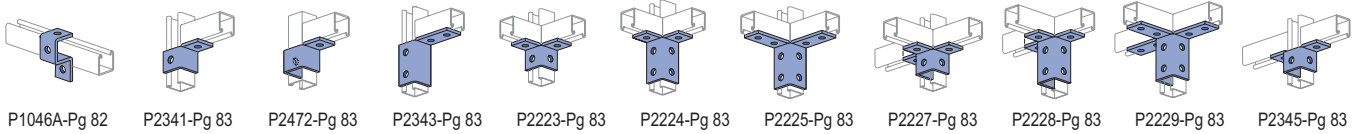


Post Bases




Brackets and Brace Fittings

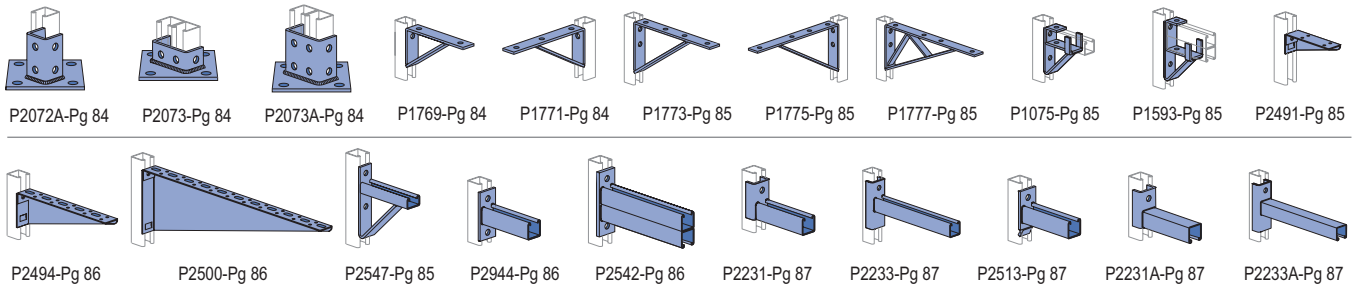

Beam Clamps

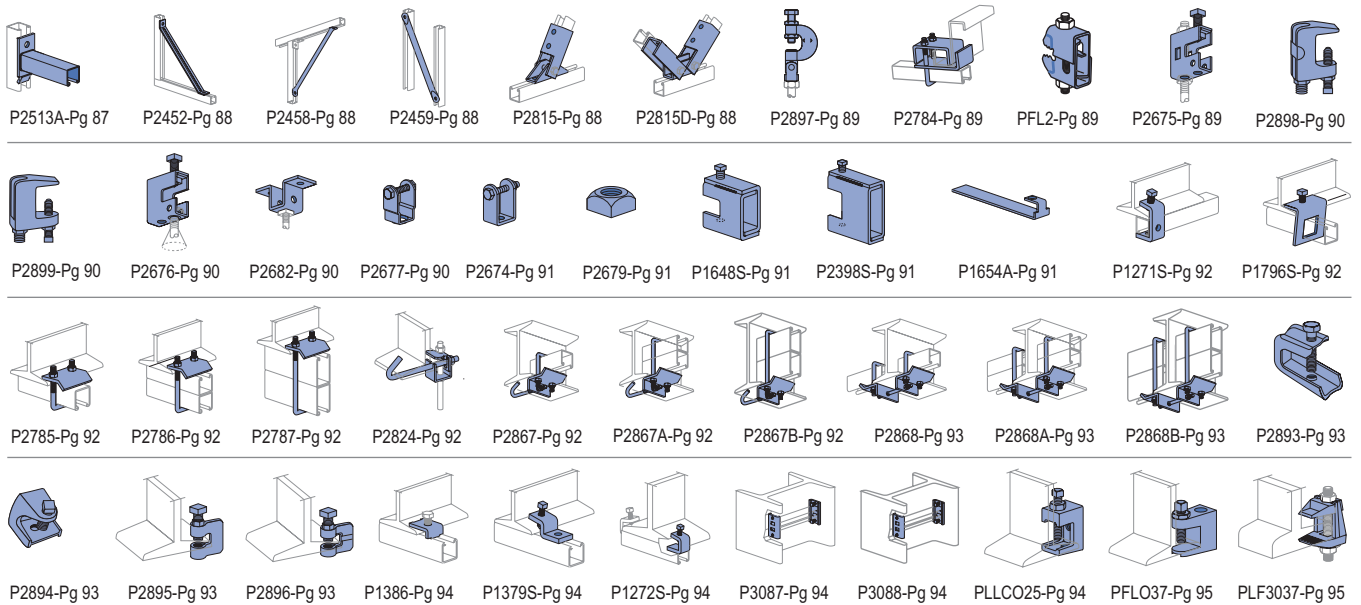


Trolley Assemblies

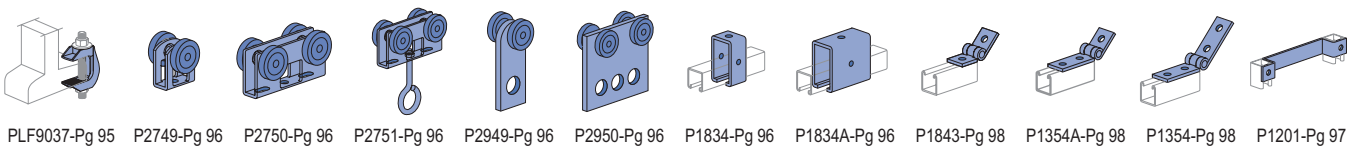

Special Applications Fittings

Seismic Retrofit Fittings

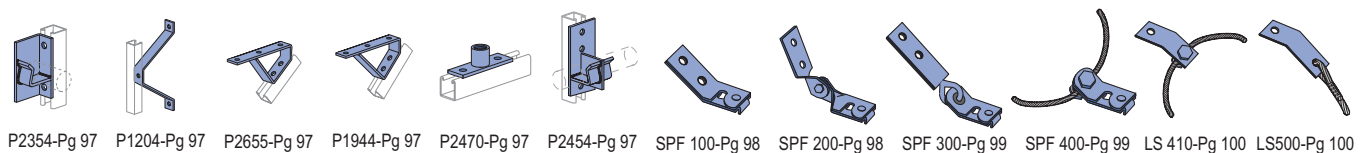



DESIGN LOAD DATA FOR TYPICAL UNISTRUT CHANNEL CONNECTIONS

90° Fittings (When used in position shown)

Load – P1026		Channel Thickness		
		12 ga.	14 ga.	16 ga.
	Lbs	1,500	1,000	750
	kN	6.67	4.45	3.34

Load – P2484		Channel Thickness		
		12 ga.	14 ga.	16 ga.
	Lbs	3,000	2,000	1,500
	kN	13.34	8.90	6.67

Load – P1026		Channel Thickness		
		12 ga.	14 ga.	16 ga.
	Lbs	1,000	650	500
	kN	4.45	2.89	2.22

Load – P1068		Channel Thickness		
		12 ga.	14 ga.	16 ga.
	Lbs	500	500	500
	kN	2.22	2.22	2.22

Load – P1325, P2235		Channel Thickness		
		12 ga.	14 ga.	16 ga.
	Lbs	2,000	2,000	1,500
	kN	8.90	8.90	6.67

Load – P1326		Channel Thickness		
		12 ga.	14 ga.	16 ga.
	Lbs	500	500	500
	kN	2.22	2.22	2.22

Load – P1458, P1579		Channel Thickness		
		12 ga.	14 ga.	16 ga.
	Lbs	1,500	1,000	1,000
	kN	6.67	4.45	4.45

Load – P1346		Channel Thickness		
		12 ga.	14 ga.	16 ga.
	Lbs	1,200	1,200	1,000
	kN	5.34	5.34	4.45


Load – P1346		Channel Thickness		
		12 ga.	14 ga.	16 ga.
	Lbs	2,000	1,500	900
	kN	8.90	6.67	4.00

Load – P1065		Channel Thickness		
		12 ga.	14 ga.	16 ga.
	Lbs	1,000	800	600
	kN	4.45	3.56	2.67

- Note:
- (1) Both ends of beams supported.
 - (2) Load data is based on P1010 nut and 1/2" bolt.
 - (3) Safety factor = 2 1/2 based on ultimate strength of connection.


1 1/2" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P1062, P1063, P1064, P1964, P2471, P2490



Part No.	Bolt Size	Hole Size	Wt/100 pcs Lbs (kg)
P1062	5/16"	1 1/2"	18 (8.2)
P1063	3/8"	7/16"	18 (8.2)
P1064	1/2"	9/16"	17 (7.7)
P1964	5/8"	1 1/16"	16 (7.3)
P2471	3/4"	1 3/16"	15 (6.8)
P2490	7/8"	1 5/16"	14 (6.4)


P1959, P1960, P1961



Part Number	U.S. Std. Thd Size	Wt/100 pcs Lbs (kg)
P1959	3/8" - 16	21 (9.5)
P1960	1/2" - 13	20 (9.1)
P1961	5/8" - 11	19 (8.6)


Material: 3/8" (9.5 mm) thick

P2862, 2863, 2864




Part Number	Bolt Size	Hole Size	Wt/100 pcs Lbs (kg)
P2862	5/16"	1 1/32"	18 (8.2)
P2863	3/8"	7/16"	18 (8.2)
P2864	1/2"	9/16"	17 (7.7)

P1065




Wt/100 pcs: 38 Lbs (17.2 kg)

P1924




Wt/100 pcs: 35 Lbs (15.9 kg)

P2325




Wt/100 pcs: 55 Lbs (24.9 kg)

P2324

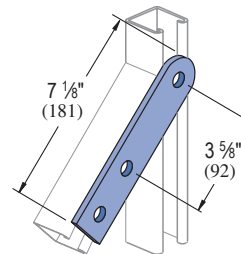


Wt/100 pcs: 75 Lbs (34.0 kg)

P1066

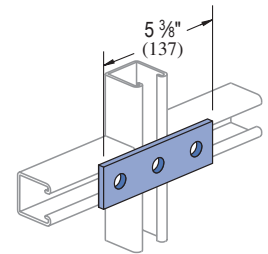


Wt/100 pcs: 56 Lbs (25.4 kg)

P1925

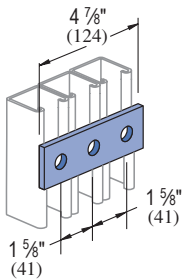


Wt/100 pcs: 50 Lbs (22.7 kg)

P1067

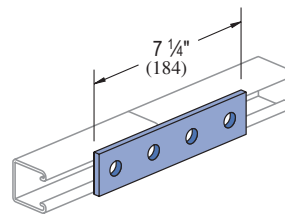


Wt/100 pcs: 78 Lbs (35.4 kg)

P2079

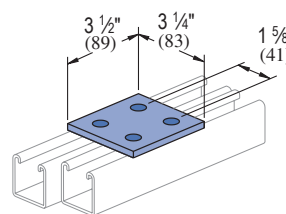


Wt/100 pcs: 73 Lbs (33.1 kg)

P1941

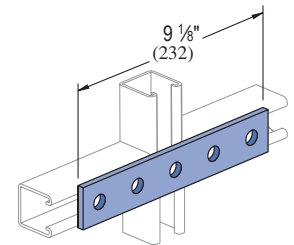


Wt/100 pcs: 94 Lbs (42.6 kg)

P1036




Wt/100 pcs: 58 Lbs (26.3 kg)

P1380 A

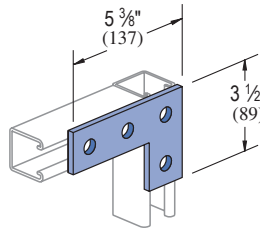


Wt/100 pcs: 80 Lbs (36.3 kg)

P1334

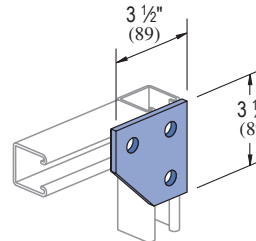

Wt/100 pcs: 70 Lbs (31.8 kg)

P1380

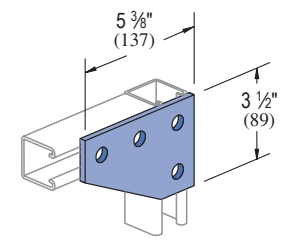


Wt/100 pcs: 105 Lbs (47.6 kg)

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




P1873

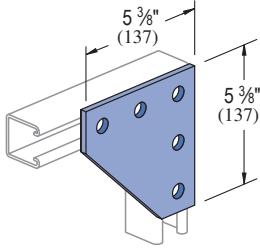


Wt/100 pcs: 150 Lbs (68.0 kg)

P1031

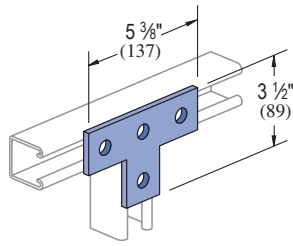


Wt/100 pcs: 80 Lbs (36.3 kg)

P1028

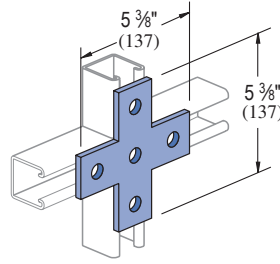


Wt/100 pcs: 105 Lbs (47.6 kg)

P1356

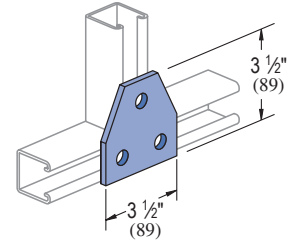


Wt/100 pcs: 70 Lbs (31.8 kg)

P1358

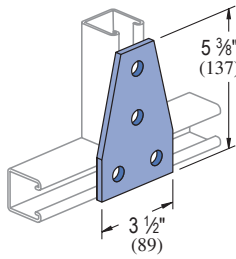


Wt/100 pcs: 105 Lbs (47.6 kg)

P1726

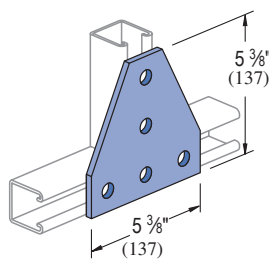


Wt/100 pcs: 148 Lbs (67.1 kg)

P1953

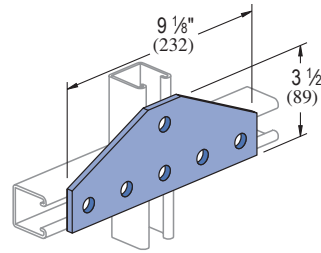


Wt/100 pcs: 176 Lbs (79.8 kg)

P1950

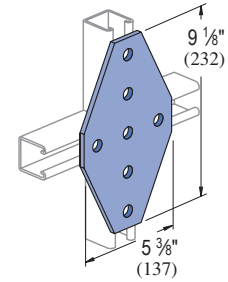


Wt/100 pcs: 240 Lbs (108.9 kg)

P1962

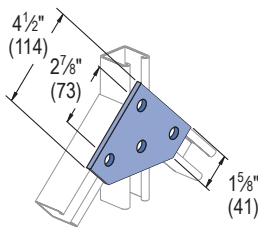


Wt/100 pcs: 112 Lbs (50.8 kg)

P2626




Wt/100 pcs: 40 Lbs (18.1 kg)

P1026




Wt/100 pcs: 38 Lbs (17.2 kg)

P1723

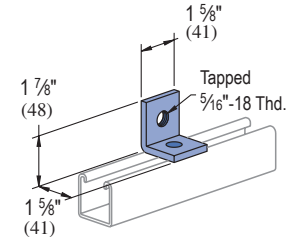


Wt/100 pcs: 34 Lbs (15.4 kg)

P1068

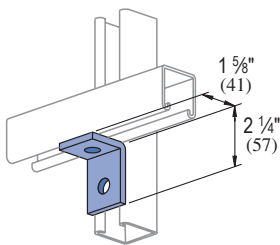


Wt/100 pcs: 38 Lbs (17.2 kg)

P1281, P1282, P1283

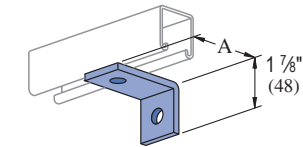


Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)
P1281	3	49
P1282	76	22.2
P1282	3 1/2	54
P1282	89	24.5
P1283	4	61
P1283	102	27.7

P1315



Wt/100 pcs: 45 Lbs (20.4 kg)

P1458

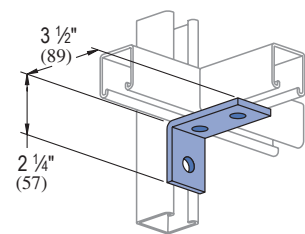


Wt/100 pcs: 58 Lbs (26.3 kg)

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)


Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)

P1538A THRU P1538D




Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)
P1538A	3 3/8 98	61 27.7
P1538B	5 7/8 149	84 38.1
P1538C	7 7/8 200	107 48.5
P1538D	9 7/8 251	130 59.0

P1498, P1499




Part Number	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P1498	4 7/8 124	2 1/2 64	65 29.5
P1499	6 7/8 175	4 1/2 114	85 38.6

P1750




Wt/100 pcs: 38 Lbs (17.2 kg)

P1747




Wt/100 pcs: 66 Lbs (29.9 kg)

P1326

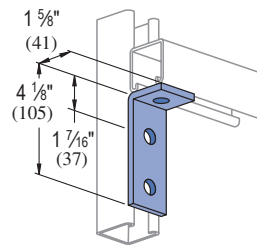


Wt/100 pcs: 58 Lbs (26.3 kg)

P1821

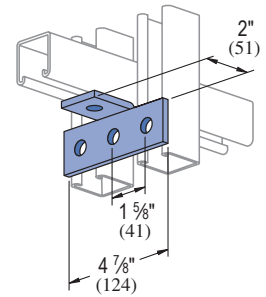


Wt/100 pcs: 71 Lbs (32.2 kg)

P1346




Wt/100 pcs: 58 Lbs (26.3 kg)

P1325

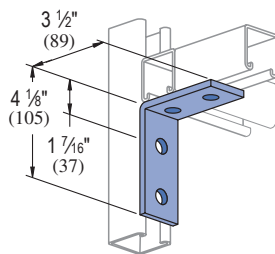


Wt/100 pcs: 78 Lbs (35.4 kg)

P1822

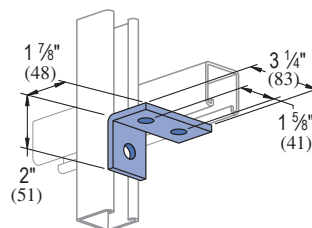


Wt/100 pcs: 55 Lbs (24.9 kg)

P1823

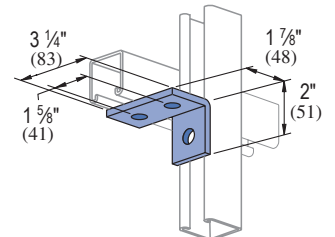


Wt/100 pcs: 55 Lbs (24.9 kg)

P1033




Wt/100 pcs: 80 Lbs (36.3 kg)

P1037

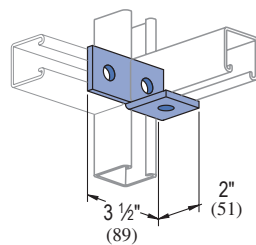


Wt/100 pcs: 58 Lbs (26.3 kg)

P1038

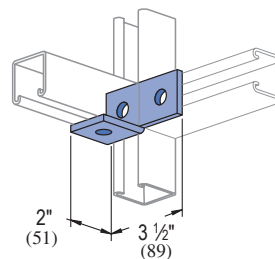

Wt/100 pcs: 58 Lbs (26.3 kg)

P1034

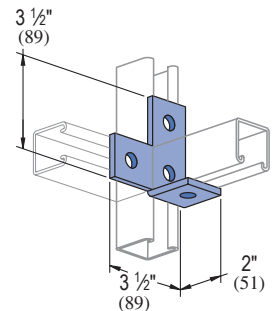


Wt/100 pcs: 80 Lbs (36.3 kg)

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




P1029

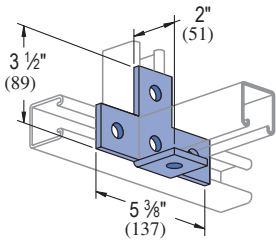


Wt/100 pcs: 105 Lbs (47.6 kg)

P1035

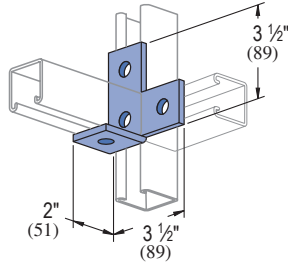


Wt/100 pcs: 80 Lbs (36.3 kg)

P1290

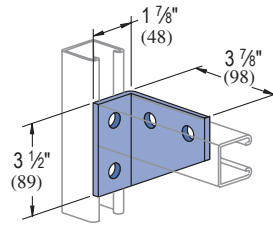


Wt/100 pcs: 101 Lbs (45.8 kg)

P1291

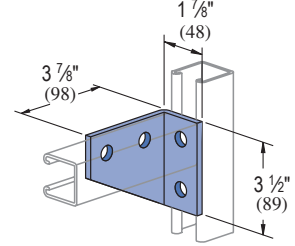


Wt/100 pcs: 101 Lbs (45.8 kg)

P1357

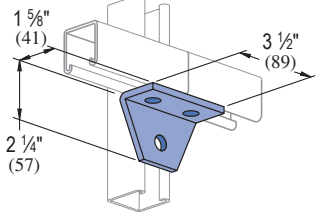


Wt/100 pcs: 70 Lbs (31.8 kg)

P1359

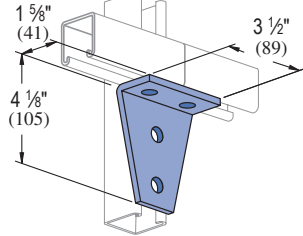


Wt/100 pcs: 105 Lbs (47.6 kg)

P1381

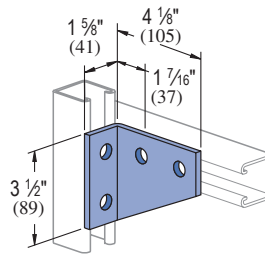


Wt/100 pcs: 105 Lbs (47.6 kg)

P1382

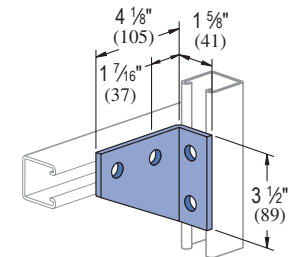


Wt/100 pcs: 105 Lbs (47.6 kg)

P1934

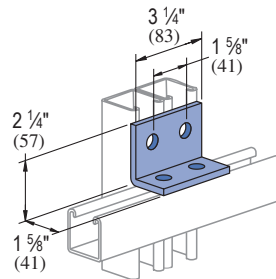


Wt/100 pcs: 75 Lbs (34.0 kg)

P1713

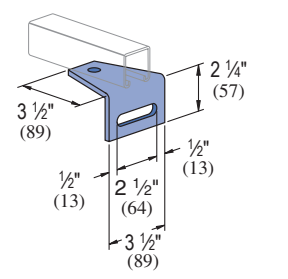


Wt/100 pcs: 97 Lbs (44.0 kg)

P1579

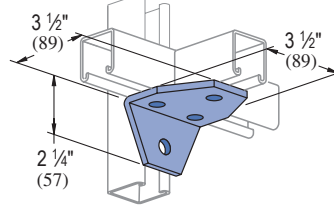


Wt/100 pcs: 103 Lbs (46.7 kg)

P1727

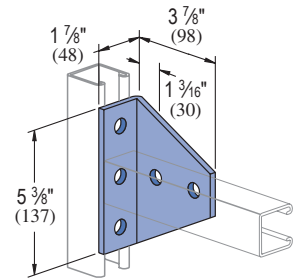


Wt/100 pcs: 154 Lbs (69.9 kg)

P1728

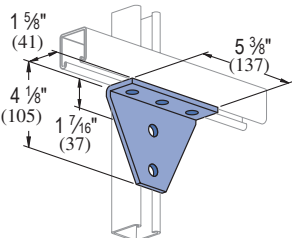


Wt/100 pcs: 154 Lbs (69.9 kg)

P2235

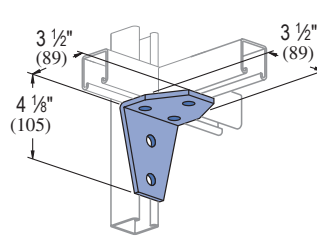


Wt/100 pcs: 135 Lbs (61.2 kg)

P1956

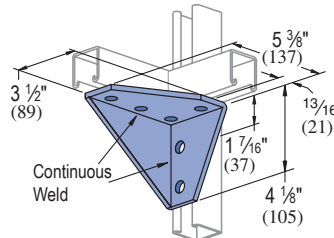

Wt/100 pcs: 230 Lbs (104.3 kg)

P1957

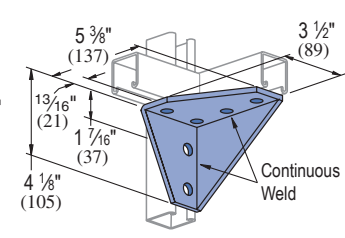


Wt/100 pcs: 230 Lbs (104.3 kg)

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)


1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P2484

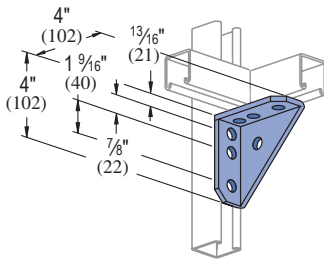


Wt/100 pcs: 134 Lbs (60.8 kg)

P2484W

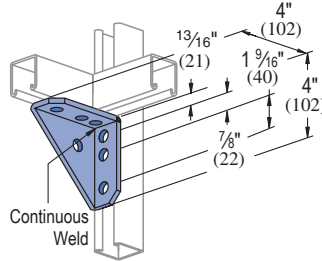


Wt/100 pcs: 134 Lbs (60.8 kg)

P1130, P1131

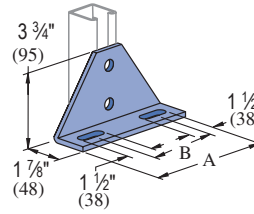

Part Number	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P1130	6 ⁵ / ₈ 168	4 102	190 86.2
P1131	8 ⁵ / ₈ 219	6 152	242 109.8


P1546, P2094 THRU P2100

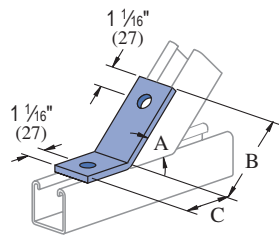

Part No.	"A" Degree (rad)	"B" In (mm)	"C" In (mm)
P2094	82 ¹ / ₂ ° 1.44	3 ³ / ₁₆ 91	1 ¹¹ / ₁₆ 43
P2095	75° 1.31	3 ³ / ₁₆ 91	1 ¹¹ / ₁₆ 43
P2096	67 ¹ / ₂ ° 1.18	3 ¹ / ₂ 89	1 ³ / ₄ 44
P2097	60° 1.05	3 ³ / ₈ 86	1 ¹ / ₂ 48
P2098	52 ¹ / ₂ ° 0.92	3 ¹ / ₄ 83	2 ¹ / ₁₆ 52
P1546	45° 0.79	3 76	2 ⁵ / ₁₆ 59
P2099	37 ¹ / ₂ ° 0.65	3 ¹ / ₂ 89	1 ¹³ / ₁₆ 46
P2100	37 ¹ / ₂ ° 0.65	2 ¹¹ / ₁₆ 68	2 ⁵ / ₈ 67

Wt/100 pcs: 58 Lbs (26.3 kg)


P2101 THRU P2104

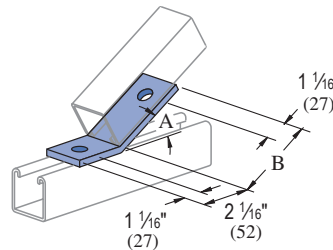

Part No.	"A" Degree (rad)	"B" In (mm)
P2101	30° 0.52	3 ¹ / ₄ 83
P2102	22 ¹ / ₂ ° 0.39	3 ⁵ / ₁₆ 84
P2103	15° 0.26	3 ⁵ / ₁₆ 84
P2104	7 ¹ / ₂ ° 0.13	3 ⁵ / ₁₆ 84

Wt/100 pcs: 58 Lbs (26.3 kg)


P1186, P2105 THRU P2110

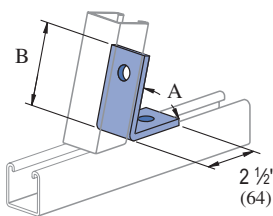

Part Number	"A" Degree (rad)	"B" In (mm)
P2105	82 ¹ / ₂ ° 1.44	3 ³ / ₁₆ 81
P2106	75° 1.31	3 ³ / ₁₆ 81
P2107	67 ¹ / ₂ ° 1.18	3 ¹ / ₈ 79
P2108	60° 1.05	3 ¹ / ₈ 79
P2109	52 ¹ / ₂ ° 0.92	3 ¹ / ₁₆ 78
P1186	45° 0.79	3 ¹ / ₈ 79
P2110	37 ¹ / ₂ ° 0.65	3 76

Wt/100 pcs: 58 Lbs (26.3 kg)

P2260 THRU P2270

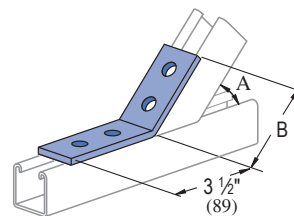

Part Number	"A" Degree (rad)	"B" In (mm)
P2270	82 ¹ / ₂ ° 1.44	3 ⁵ / ₈ 91
P2269	75° 1.31	3 ⁵ / ₈ 91
P2268	67 ¹ / ₂ ° 1.18	3 ⁵ / ₈ 91
P2267	60° 1.05	3 ¹¹ / ₁₆ 94
P2266	52 ¹ / ₂ ° 0.92	3 ¹¹ / ₁₆ 94
P2265	45° 0.79	3 ¹¹ / ₁₆ 94
P2264	37 ¹ / ₂ ° 0.65	3 ¹¹ / ₁₆ 94
P2263	30° 0.52	3 ¹¹ / ₁₆ 94
P2262	22 ¹ / ₂ ° 0.39	3 ³ / ₄ 95
P2261	15° 0.26	3 ³ / ₄ 95
P2260	7 ¹ / ₂ ° 0.13	3 ³ / ₄ 95


Wt/100 pcs: 78 Lbs (35.4 kg)

Standard Dimensions for 1⁵/₈" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: ⁹/₁₆" (14mm); Hole Spacing - From End: ¹³/₁₆" (21mm); Hole Spacing - On Center: 1⁷/₈" (48mm); Width: 1⁵/₈" (41mm); Thickness: ¹/₄" (6mm)




P1045

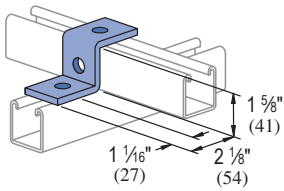


Wt/100 pcs: 55 Lbs (24.9 kg)

P1347




Wt/100 pcs: 55 Lbs (24.9 kg)

P1453

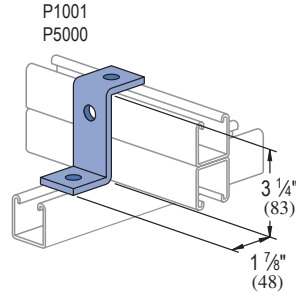


Wt/100 pcs: 70 Lbs (31.8 kg)

P1454

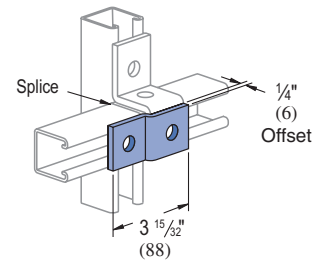


Wt/100 pcs: 38 Lbs (17.2 kg)

P1479A THRU P1479E




Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)
P1479A	4 (102)	81 (36.7)
P1479B	5 (127)	92 (41.7)
P1479C	6 (152)	104 (47.2)
P1479D	7 (178)	115 (52.2)
P1479E	8 (203)	127 (57.6)

P1730

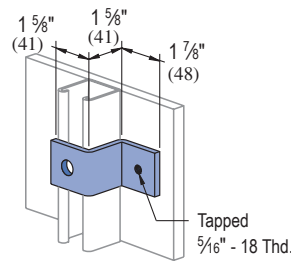


Wt/100 pcs: 54 Lbs (24.5 kg)

P1734

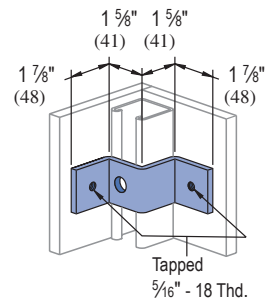


Wt/100 pcs: 70 Lbs (31.8 kg)

P1736

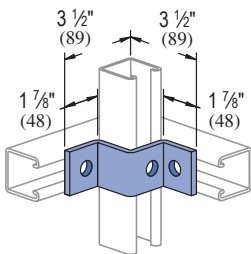


Wt/100 pcs: 70 Lbs (31.8 Kg)

P2360

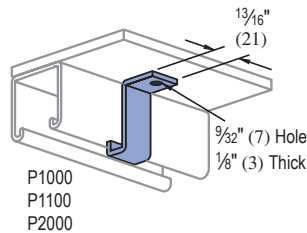


Wt/100 pcs: 9 Lbs (4.1 kg)

P5560

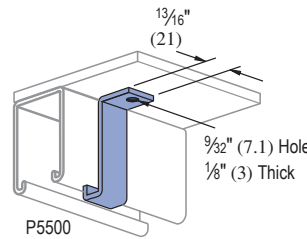


Wt/100 pcs: 11 Lbs (5.0 kg)

P3045

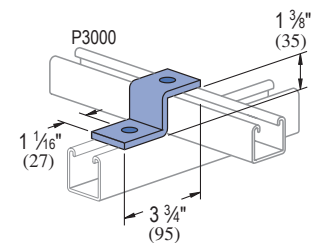


Wt/100 pcs: 53 Lbs (24.0 kg)

P3345

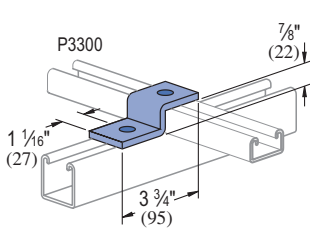


Wt/100 pcs: 47 Lbs (21.3 kg)

P4045

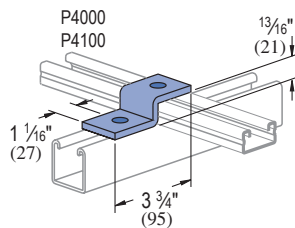


Wt/100 pcs: 47 Lbs (21.3 kg)

P5545

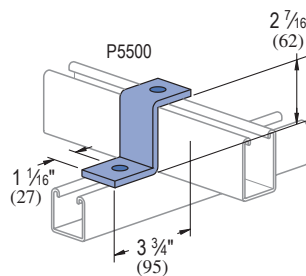

Wt/100 pcs: 67 Lbs (30.4 kg)

P2469

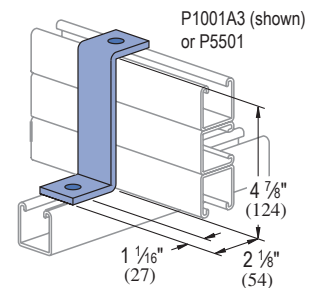


Wt/100 pcs: 93 Lbs (42.2 kg)

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)


1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P2800




Part Number	Bolt Size In	Wt/100 pcs Lbs (kg)
P2800-25	1/4"	14 6.4
P2800-37	3/8"	14 6.4
P2800-50	1/2"	13 5.9
P2800-62	5/8"	13 5.9
P2800-75	3/4"	13 5.9

P1363A THRU P1363E




Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)
P1363A	4	78
P1363B	5	89
P1363C	6	101
P1363D	7	112
P1363E	8	124

P1320

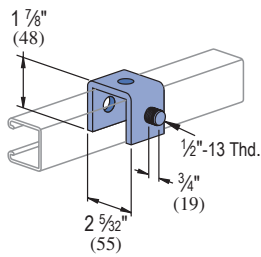


Wt/100 pcs: 63 Lbs (28.6 kg)

P1376




Wt/100 pcs: 128 Lbs (58.1 kg)

P4376




Wt/100 pcs: 85 Lbs (38.6 kg)

P1376A




Wt/100 pcs: 197 Lbs (89.4 kg)

P4376A

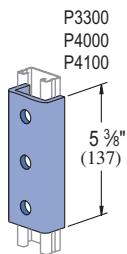


Wt/100 pcs: 130 Lbs (59.0 kg)

P1377, P4377, P5077, P5577

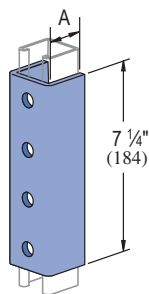


Part Number	For Use With	Wt/100 pcs Lbs (kg)
P1377	P1000, P1100, P2000	265 120
P4377	P3300, P4000, P4100	176 80
P5077	P5000	390 177
P5577	P5500	310 141

P1047




Wt/100 pcs: 88 Lbs (39.9 kg)

P3047




Wt/100 pcs: 84 Lbs (38.1 kg)

P4047

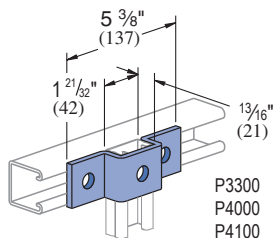


Wt/100 pcs: 71 Lbs (32.2 kg)

P1455

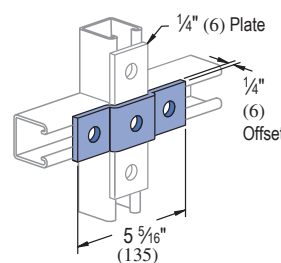

Wt/100 pcs: 58 Lbs (26.3 kg)

P5547

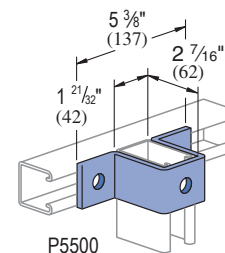


Wt/100 pcs: 108 Lbs (49.0 kg)

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




P1383

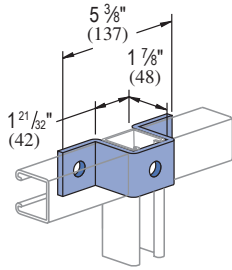


Wt/100 pcs: 95 Lbs (43.1 kg)

P1732

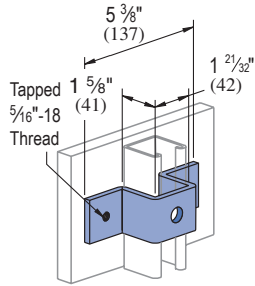

Wt/100 pcs: 88 Lbs (39.9 kg)


P2237

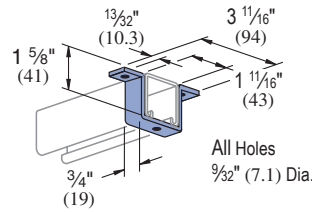

Material: 1/8" (3.2) thick.

Wt/100 pcs: 18 Lbs (8.2 kg)


P5543

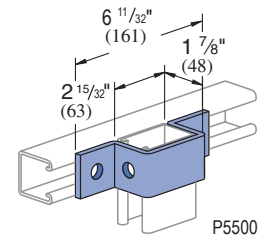

P5500


Wt/100 pcs: 97 Lbs (44.0 kg)

P1048, P1049, P1050



Part Number	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P1048	7 1/4 184	4 1/8 105	105 47.6
P1049	8 1/2 216	5 3/8 137	120 54.4
P1050	10 3/8 264	7 1/4 184	130 59.0


P1043A



P1001A

Wt/100 pcs: 105 Lbs (47.6 kg)


P1737

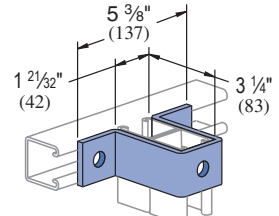

P1001 (shown), P1101, P2001, P4004 or P5000


Wt/100 pcs: 128 Lbs (58.1 kg)

P2473

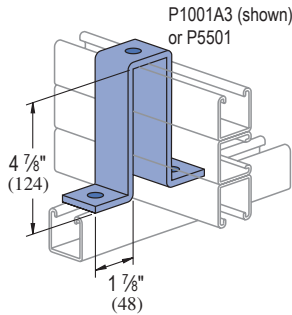

Wt/100 pcs: 197 Lbs (89.4 kg)


P4043

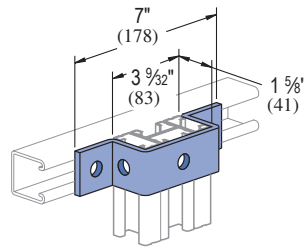

P4004 (shown), P1001, P1101, P2001, or P5000


Wt/100 pcs: 106 Lbs (48.1 kg)

P1044

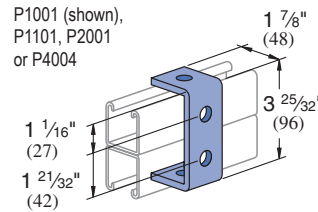


Wt/100 pcs: 70 Lbs (31.8 kg)

P1973




Wt/100 pcs: 53 Lbs (24.0 kg)

P2326

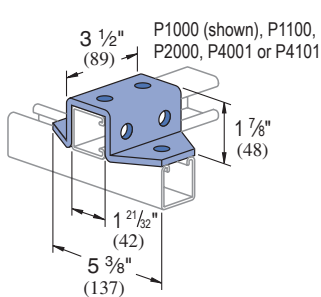


Wt/100 pcs: 171 Lbs (77.6 kg)

P2328

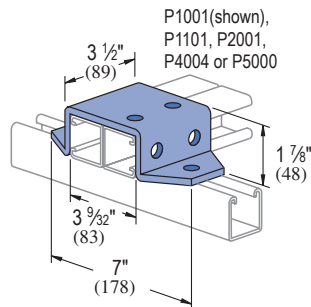


Wt/100 pcs: 209 Lbs (94.8 kg)

P2329

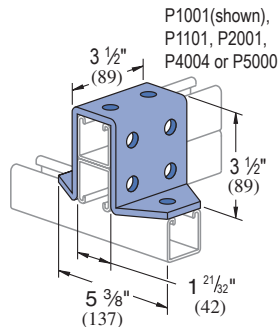

Wt/100 pcs: 257 Lbs (116.6 kg)

P1046A




Wt/100 pcs: 76 Lbs (34.5 kg)

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)


P2341 R-L

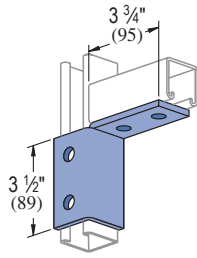

R - As shown
L - Opposite hand


Wt/100 pcs: 60 Lbs (27.2 kg)

P2224




Wt/100 pcs: 115 Lbs (52.2 kg)

P2229

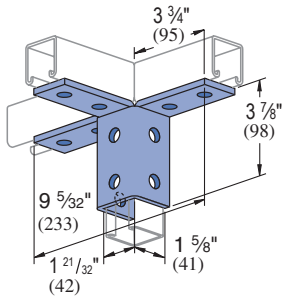

Wt/100 pcs: 230 Lbs (104.3 kg)


P2344 R-L

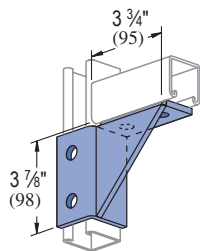

R - As shown
L - Opposite hand

Wt/100 pcs: 176 Lbs (79.8 kg)


P2472 R-L

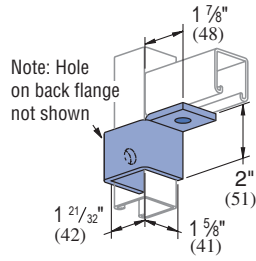

R - As shown
L - Opposite hand


Wt/100 pcs: 75 Lbs (34.0 kg)

P2225

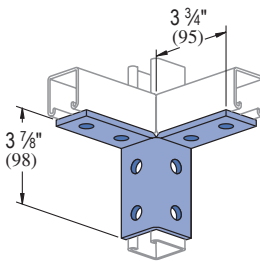


Wt/100 pcs: 155 Lbs (70.3 kg)

P2345

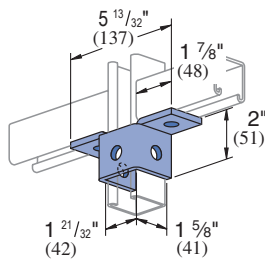


Wt/100 pcs: 93 Lbs (42.2 kg)

P2226

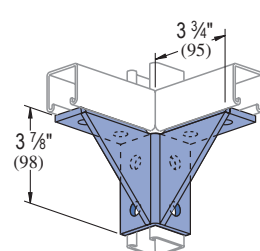

Wt/100 pcs: 217 Lbs (98.4 kg)


P2343 R-L

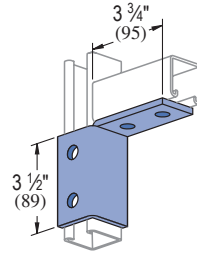

R - As shown
L - Opposite hand


Wt/100 pcs: 119 Lbs (54.0 kg)

P2227

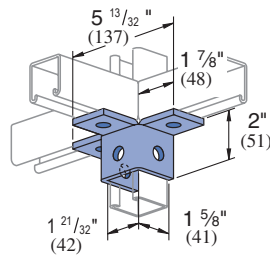


Wt/100 pcs: 113 Lbs (51.3 kg)

P2346

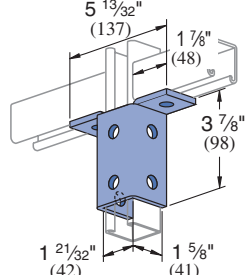


Wt/100 pcs: 150 Lbs (68.0 kg)

P2230

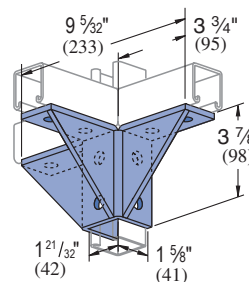


Wt/100 pcs: 310 Lbs (140.6 kg)

P2223




Wt/100 pcs: 76 Lbs (34.5 kg)

P2228

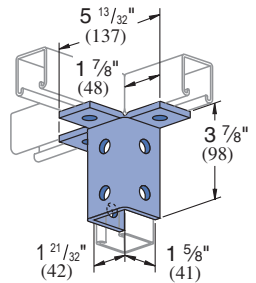

Wt/100 pcs: 177 Lbs (80.3 kg)


P2347

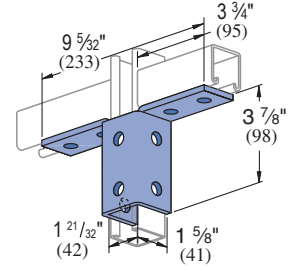

Wt/100 pcs: 193 Lbs (87.5 kg)

P2245

Fitting notched for continuous vertical.

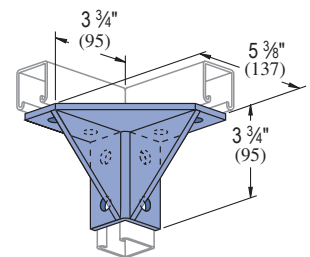


Wt/100 pcs: 315 Lbs (142.9 kg)

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)




P2348

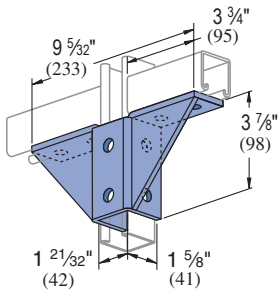


Wt/100 pcs: 274 Lbs (124.3 kg)

P2453

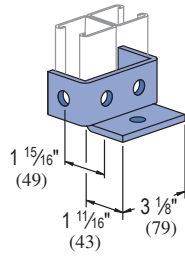


Wt/100 pcs: 116 Lbs (52.6 kg)

P1887

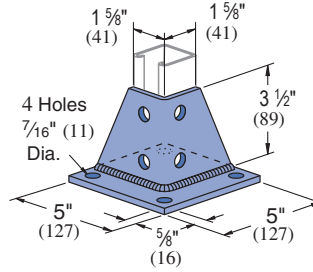


Wt/100 pcs: 297 Lbs (134.8 kg)

P2941, P2942

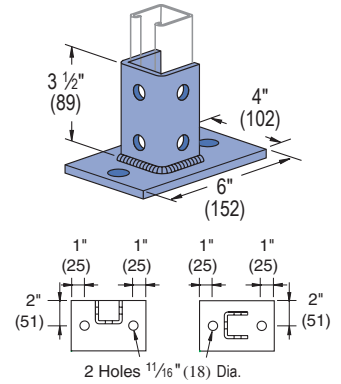


Wt/100 pcs: 358 Lbs (162.4 kg)

P2072, P2072 SQ




P2072

P2072A, P2072A SQ




P2072A

P2073, P2073 SQ





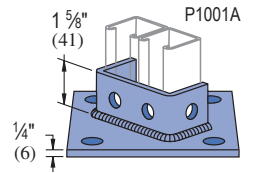


P2073


P2073A, P2073A SQ

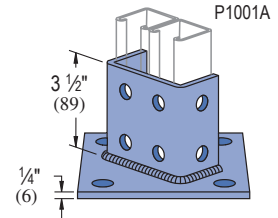


P2073A

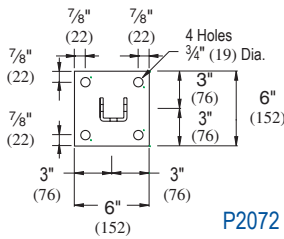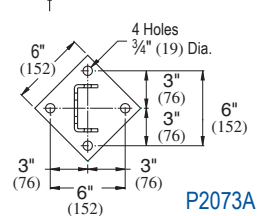


P2072 SQ

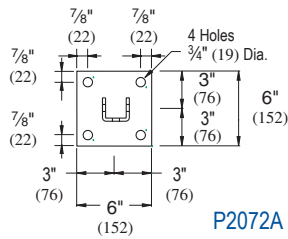

P2072A SQ

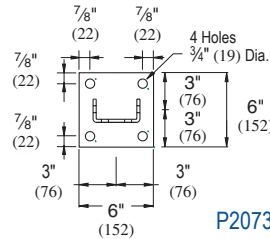

P2073 SQ

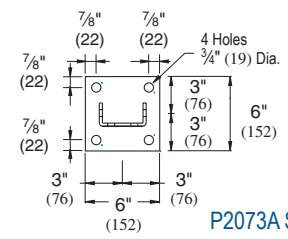

P2073A SQ


Wt/100 pcs: 307 Lbs (139.3 kg)

Wt/100 pcs: 373 Lbs (169.2 kg)

Wt/100 pcs: 325 Lbs (147.4 kg)

Wt/100 pcs: 408 Lbs (185.1 kg)

P1769

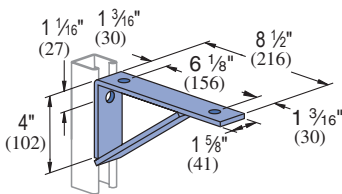


Material: 1/4" (6.4) thick steel.

Wt/100 pcs: 174 Lbs (78.9 kg)

Part No.	Vertical Channel Gauge	Uniform Design Load	
		Lbs	(kN)
P1000	12	800	3.56
P1100	14	600	2.67
P2000	16	400	1.78

Safety Factor 2 1/2

P1771

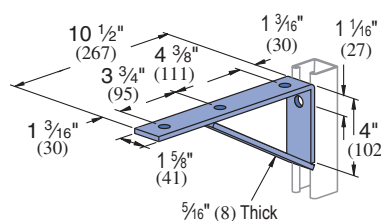

Material: 1/4" (6.4) thick steel.

Wt/100 pcs: 206 Lbs (93.4 kg)

Part No.	Vertical Channel Gauge	Uniform Design Load	
		Lbs	(kN)
P1000	12	800	3.56
P1100	14	600	2.67
P2000	16	400	1.78


Safety Factor 2 1/2

Standard Dimensions for 1 1/2" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)

Note : When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping.

P1773

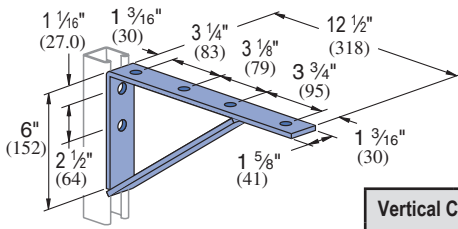


Part No.	Gauge	Vertical Channel	Uniform Design Load Lbs (kN)
P1000	12	12	900 (4.00)
P1100	14	14	800 (3.56)
P2000	16	16	450 (2.00)

Material: 1/4" (6.4) thick steel.

Safety Factor 2 1/2

Wt/100 pcs: 264 Lbs (119.7 kg)

P1775

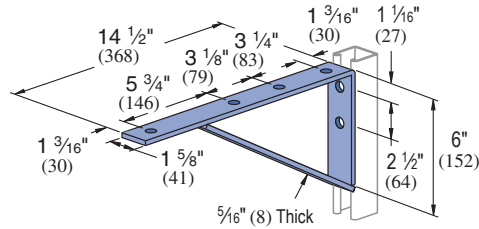


Part No.	Gauge	Vertical Channel	Uniform Design Load Lbs (kN)
P1000	12	12	900 (4.00)
P1100	14	14	800 (3.56)
P2000	16	16	450 (2.00)

Material: 1/4" (6.4) thick steel.

Safety Factor 2 1/2

Wt/100 pcs: 295 Lbs (133.8 kg)

P1075



P1000
P1100
P2000
P4001

Part No.	Gauge	Vertical Channel	Allowable Moment* In-Lbs (N•M)
P1000	12	12	5,100 (576)
P1100	14	14	4,400 (497)
P2000	16	16	3,200 (362)


Safety Factor 2 1/2

Material: 1/4" (6.4) thick steel.

Wt/100 pcs: 229 Lbs (103.9 kg)

* Allowable moment for fitting only. Channel may determine overall capacity.

P1593



P1001
P1101
P5000
P2001

Part No.	Gauge	Vertical Channel	Allowable Moment* In-Lbs (N•M)
P1000	12	12	13,000 1,469
P1100	14	14	9,100 1,028
P2000	16	16	6,500 734


Safety Factor 2 1/2

Material: 1/4" (6.4) thick steel.

Wt/100 pcs: 272 Lbs (123.4 kg)

* Allowable moment for fitting only. Channel may determine overall capacity.

P1777

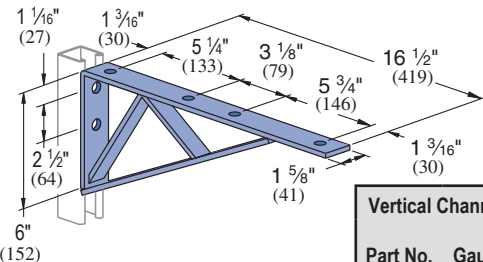

Part No.	Gauge	Vertical Channel	Uniform Design Load Lbs (kN)
P1000	12	12	1,200 (5.34)
P1100	14	14	900 (4.00)
P2000	16	16	600 (2.67)


Material: 1/4" (6.4) thick steel.

Safety Factor 2 1/2

Wt/100 pcs: 385 Lbs (174.6 kg)


P2547 THRU P2551

CABLE TRAY BRACKET



Part Number	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)	Uniform Load* Lbs (kN)
P2547	15	8 3/4	420	1,000
	381	222	190.5	4.45
P2548	21	8 3/4	628	1,000
	533	222	284.9	4.45
P2549	27	11 1/4	860	900
	686	286	390.1	4.00
P2550	33	11 1/4	1010	900
	838	286	458.1	4.00
P2551	39	16	1257	800
	991	406	683.3	3.56

P2491 R-L THRU P2493 R-L

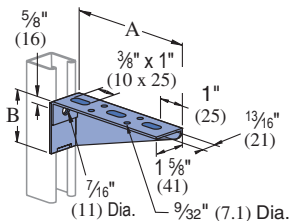

Part No.	Gauge	Vertical Channel	Uniform Design Load Lbs (kN)
P1000	12	12	300 (1.33)
P1100	14	14	250 (1.11)
P2000	16	16	200 (.89)

Safety Factor - 2 1/2

Part Number	Stamped Ident. No.	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P2491 R-L	121892 R-L	6	1 15/16	67
		52	49	30.4
P2492 R-L	121893 R-L	8	2 7/16	92
		203	62	41.7
P2493 R-L	121894 R-L	10	2 15/16	120
		254	75	54.4

R - As shown; L - Opposite hand

Material : 12 Gauge Steel.


Standard Dimensions for 1 1/2" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 5/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 3/8" (41mm); Thickness: 1/4" (6mm)

Note : When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping.



P2494 R-L THRU P2499 R-L

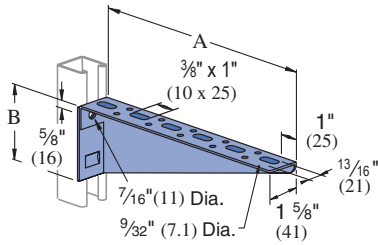


Part No.	Vertical Channel Gauge	Uniform Design Load Lbs (kN)
P1000	12	300 (1.33)
P1100	14	250 (1.11)
P2000	16	200 (.89)

Safety Factor - 2½

Part Number	Stamped Ident. No.	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P2494 R-L	121895 R-L	12	3 7/16	152
		305	87	68.9
P2495 R-L	121896 R-L	14	3 15/16	173
		356	100	78.5
P2496 R-L	121897 R-L	16	4 1/16	223
		406	113	101.2
P2497 R-L	121898 R-L	18	4 15/16	266
		457	125	120.7
P2498 R-L	121899 R-L	20	5 1/16	308
		508	138	139.7
P2499 R-L	121900 R-L	22	5 5/16	355
		559	151	161.0

Material : 12 Gauge Steel.
R - As shown; L - Opposite hand

P2500 R-L THRU P2503 R-L

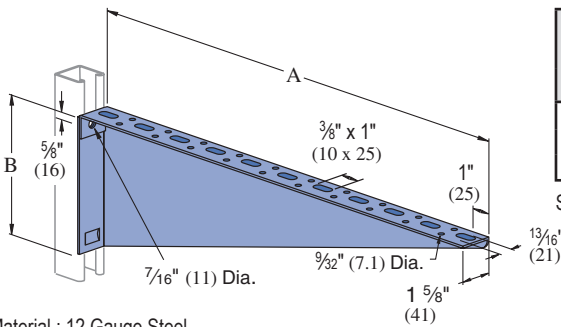


Part No.	Vertical Channel Gauge	Uniform Design Load Lbs (kN)
P1000	12	300 (1.33)
P1100	14	250 (1.11)
P2000	16	200 (.89)

Safety Factor - 2½

Part Number	Stamped Ident. No.	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P2500 R-L	121901 R-L	24	6 1/16	400
		610	164	181.4
P2501 R-L	121902 R-L	26	6 15/16	445
		660	176	201.8
P2502 R-L	121903 R-L	28	7 1/16	493
		711	189	223.6
P2503 R-L	121904 R-L	30	7 5/16	545
		762	202	247.2

Material : 12 Gauge Steel.
R - As shown; L - Opposite hand

P2944, P2945, P2946, P2947

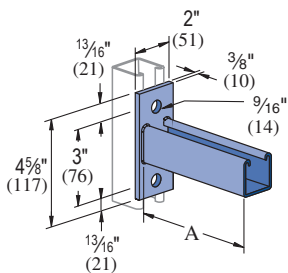


Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)	Uniform Load* Lbs (kN)
P2944	6	185	1200
	152	84	5.34
P2945	12	293	600
	305	133	2.67
P2946	18	401	400
	457	182	1.78
P2947	24	509	300
	610	231	1.33

Safety Factor 2½

* Mounted on 12 Ga. Channel

P2542 THRU P2546

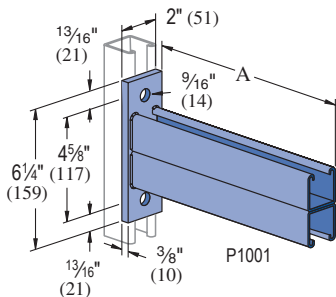

Safety Factor - 2½


Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs (kN)
P2542	12	502	P1000	12	2,000 (8.90)
			P1100	14	1,400 (6.23)
			P2000	16	1,000 (4.45)
P2543	18	692	P1000	12	1,300 (5.78)
			P1100	14	900 (4.00)
			P2000	16	650 (2.89)
P2544	24	882	P1000	12	1,000 (4.45)
			P1100	14	700 (3.11)
			P2000	16	500 (2.22)
P2545	30	1,072	P1000	12	800 (3.56)
			P1100	14	560 (2.49)
			P2000	16	400 (1.78)
P2546	36	1,262	P1000	12	650 (2.89)
			P1100	14	450 (2.00)
			P2000	16	320 (1.42)

Standard Dimensions for 1½" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)

Note : When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping.


P2231, P2232



Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs (kN)
P2231	6	191	P1000	12	1,600 (7.12)
	152	86.6	P1100	14	1,200 (5.34)
			P2000	16	800 (3.56)
P2232	12	292	P1000	12	800 (3.56)
	305	132.4	P1100	14	600 (2.67)
			P2000	16	400 (1.78)

Safety Factor - 2½


P2231A, P2232A



Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs (kN)
P2231A	6	191	P1000	12	1,600 (7.12)
	152	86.6	P1100	14	1,200 (5.34)
			P2000	16	800 (3.56)
P2232A	12	292	P1000	12	800 (3.56)
	305	132.4	P1100	14	600 (2.67)
			P2000	16	400 (1.78)

Safety Factor - 2½


P2233, P2234

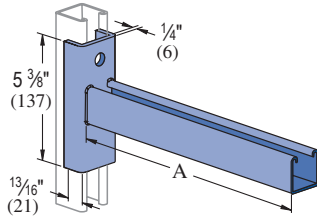

Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs (kN)
P2233	18	436	P1000	12	600 (2.67)
	457	197.8	P1100	14	450 (2.00)
			P2000	16	300 (1.33)
P2234	24	536	P1000	12	450 (2.00)
	610	243.1	P1100	14	330 (1.47)
			P2000	16	220 (.98)

Safety Factor - 2½


P2233A, P2234A

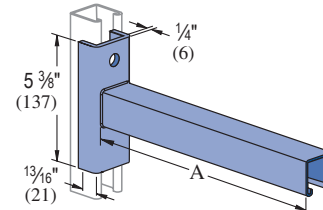

Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs (kN)
P2233A	18	436	P1000	12	600 (2.67)
	457	197.8	P1100	14	450 (2.00)
			P2000	16	300 (1.33)
P2234A	24	536	P1000	12	450 (2.00)
	610	243.1	P1100	14	330 (1.47)
			P2000	16	220 (.98)

Safety Factor - 2½

P2513 THRU P2516




When installed in inverted position use 60% of loads shown.

Safety Factor 2½

Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs (kN)
P2513	6	161	P1000	12	1,200 (5.34)
	152	73.0	P1100	14	800 (3.56)
			P2000	16	600 (2.67)
P2514	12	261	P1000	12	600 (2.67)
	305	118.4	P1100	14	400 (1.78)
			P2000	16	300 (1.33)
P2515	18	361	P1000	12	400 (1.78)
	457	163.7	P1100	14	270 (1.20)
			P2000	16	200 (.89)
P2516	24	461	P1000	12	300 (1.33)
	610	209.1	P1100	14	200 (.89)
			P2000	16	150 (.67)

P2513A THRU P2516A



When installed in inverted position use 60% of loads shown.

Safety Factor 2½

Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)	Vertical Channel Part No.	Gauge	Uniform Design Load Lbs (kN)
P2513A	6	161	P1000	12	1,200 (5.34)
	152	73.0	P1100	14	800 (3.56)
			P2000	16	600 (2.67)
P2514A	12	261	P1000	12	600 (2.67)
	305	118.4	P1100	14	400 (1.78)
			P2000	16	300 (1.33)
P2515A	18	361	P1000	12	400 (1.78)
	457	163.7	P1100	14	270 (1.20)
			P2000	16	200 (.89)
P2516A	24	461	P1000	12	300 (1.33)
	610	209.1	P1100	14	200 (.89)
			P2000	16	150 (.67)

Standard Dimensions for 1½" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)



Hole Diameter: 5/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1 1/8" (48mm); Width: 1 1/2" (41mm); Thickness: 1/4" (6mm)

Note : When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping.



P2815



ADJUSTABLE BRACE FITTING

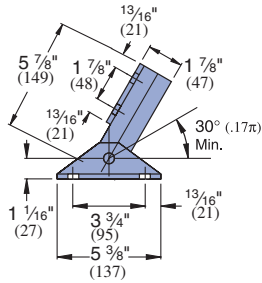

Wt/100 pcs: 307 Lbs (139.3 kg)

P2815D

ADJUSTABLE BRACE FITTING

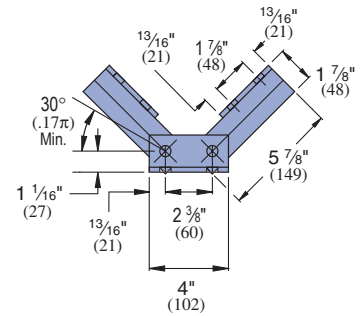





Wt/100 pcs: 497 Lbs (225.4 kg)

P2452

KNEE BRACE

P2458-18 THRU P2458-36


TUBULAR KNEE BRACES

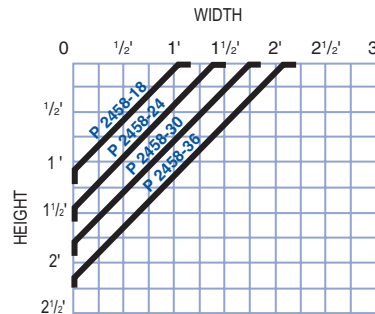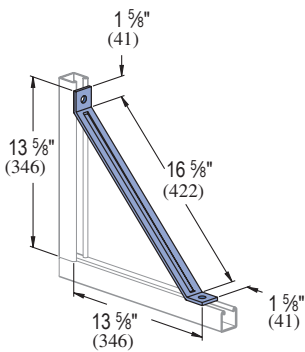

Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2458-18	18	146
P2458-24	24	186
P2458-30	30	227
P2458-36	36	267
	914	121.1

Design Axial Load
1200 Lbs (5.34 kN)

Material: 1/4" (6.4) thick steel.




Design Loads
Compression = 1500 Lbs (6.67 kN)
Tension = 300 Lbs (1.33 kN)



Wt/100 pcs: 277 Lbs (125.6 kg)

P2459-36 THRU P2459-96

TUBULAR BACK BRACES

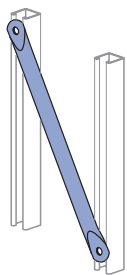

1. The vertical lines of the graph correspond to the center to center line dimension of the uprights.
2. Along this vertical line locate the (maximum usable) horizontal bracing height line.
3. The arc line that intersects the point formed by the intersection of the two lines, indicates the brace required.
4. 60° - 30° maximum, minimum brace angles are indicated for maximum effect.

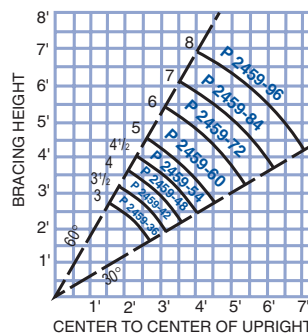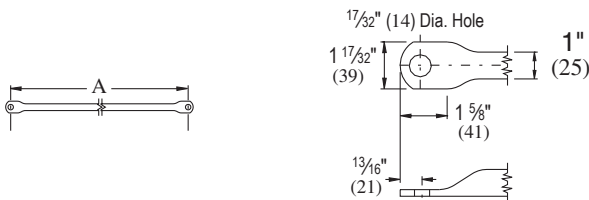


Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2459-36	36	255
	914	115.7
P2459-42	42	296
	1,067	134.3
P2459-48	48	336
	1,219	152.4
P2459-54	54	377
	1,372	171.0
P2459-60	60	418
	1,524	189.6
P2459-72	72	499
	1,829	226.3
P2459-84	84	580
	2,134	263.1
P2459-96	96	661
	2,438	299.8

Standard Dimensions for 1 1/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1 1/8" (48mm); Width: 1 1/8" (41mm); Thickness: 1/4" (6mm)

Note : When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping.

P2897

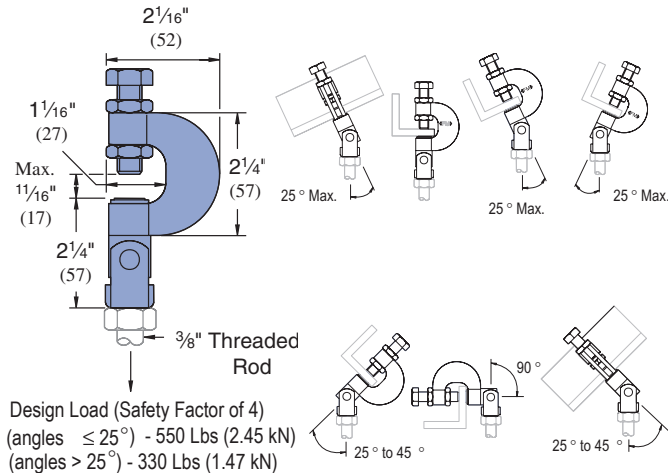


Design Load (Safety Factor of 4)
(angles ≤ 25°) - 550 Lbs (2.45 kN)
(angles > 25°) - 330 Lbs (1.47 kN)

Safety Factor 4
Torque: 13 Ft-Lbs (18 N*m)

Wt/100 pcs: 33 Lbs (15.0 kg)


P2784

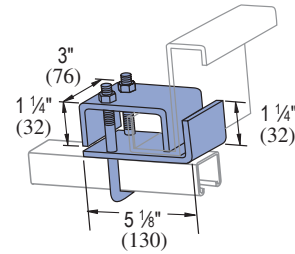

Part Number	For Use With	Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2784-1	P1000,	1,200	175
	P1100,	5.34	79.3
	P2000		
P2784-2	P1001,	1,200	179
	P1101,	5.34	81.1
	P2001		
P2784-3	P5001,	1,200	180
	P5501	5.34	81.5

PFL2-37

SWIFTGRIP

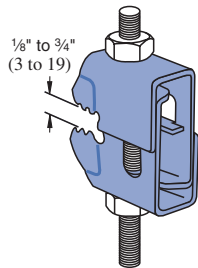


Designed to significantly reduce installation time, while offering greater performance than cast beam clamps, the Swiftgrip enables connection of drop rod to beam in one simple operation.

Ideal for the suspension of building services equipment including heating, ventilating and air conditioning equipment; pipework; fire protection systems; electrical equipment and cable tray.





Available finish choices are Stainless Steel or Perma-Gold™ Industry Standard Yellow Dichromate.

Design Load is 540 Lbs (2.40 kN).
Safety Factor is 4
Torque is 8 Ft/Lbs (10.8 N*m)
Rod Size is 3/8" (9.5mm)

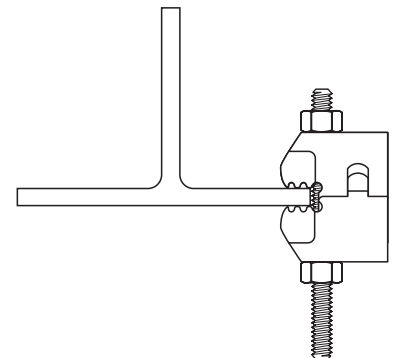

Wt/100 pcs: 26 Lbs (11.9 kg)

P2675

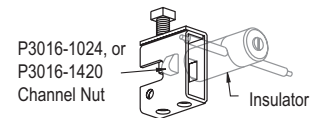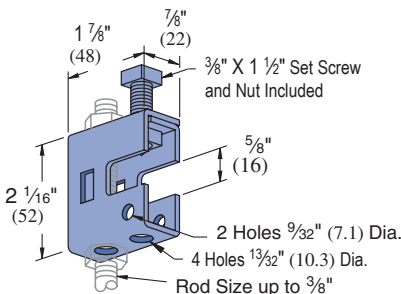

Clamp Materials: .105" (2.7) thick steel.
Clamp P2675 is designed for light duty rod suspension.
It also may be used with P3016-1024 or P3016-1420 nut as illustrated above for mounting insulators, etc.

Wt/100 pcs: 33 Lbs (15.0 kg)



Standard Dimensions for 1 3/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 3/8" (41mm); Thickness: 1/4" (6mm)

Note: When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.



P2676

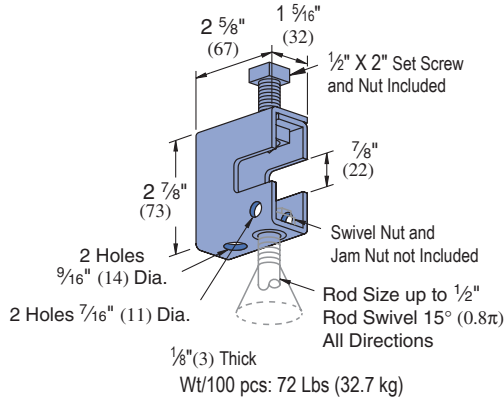

Design Load
300 Lbs (1.33 kN)



Design Load
500 Lbs (2.22 kN)


Clamp P2676 provides a means of rod suspension where a free swing of up to 15° (0.8π) is required. Clamp will accommodate 1/4" (6), 3/8" (10), or 1/2" (13) rods. Order swivel nuts P2679-4, -6, or -8 as required. Clamp may also be used with P2677 as illustrated in application drawings.

Clamp Materials: 1/8" (3.2) thick steel.

P2898

UNIVERSAL BEAM CLAMP


- Maximum temperature of 450° F (232° C)
- At least one full thread must be exposed

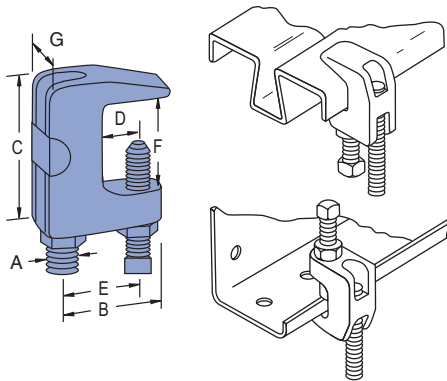

	A In	B In (mm)	C In (mm)	D In (mm)	E In (mm)	F In (mm)	G In (mm)	Max Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2898-37	3/8	1	1 1/2	1/2	1	3/4	7/8	400 1.78	33 15.0
P2898-50	1/2	1	1 1/2	1/2	1	3/4	7/8	500 2.22	33 15.0
P2898-62	5/8	1 1/2	1 1/2	1/2	1	3/4	1	600 2.67	22 10.0
P2898-75	3/4	1 1/2	1 3/4	5/8	1 1/2	1	1 1/4	800 3.56	88 40.0
P2898-87	7/8	2	1 3/4	5/8	1 1/2	1	1 1/4	1,200 5.34	79 35.9

P2899



WIDE THROAT BEAM CLAMP

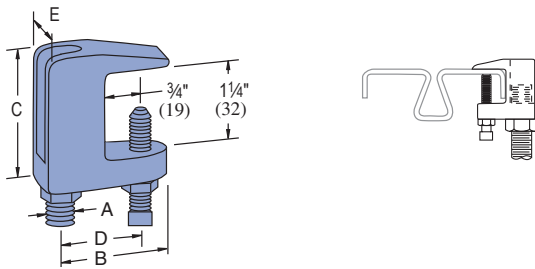

- Maximum temperature of 450° F (232° C)

	Rod Size					Max. Load Lbs (kN)	Wt/100 pcs Lbs (kg)
	A in	B In (mm)	C In (mm)	D In (mm)	E In (mm)		
P2899-37	3/8	1 5/8	2	1	7/8	400 1.78	28 12.7
P2899-50	1/2	1 5/8	2	1	7/8	500 2.22	34 15.4
P2899-62	5/8	1 3/4	2 1/4	1 1/4	1	600 2.67	66 30.0
P2899-75	3/4	1 7/8	2 3/8	1 3/8	1 1/4	800 3.56	83 37.7


P2682

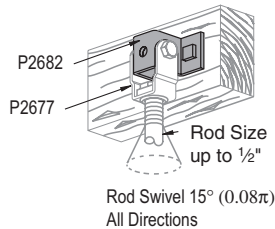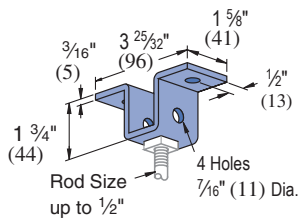

Hanger clevis for up to 1/2" (12.7) rod suspension from wood ceilings. May also be used with P2677 as illustrated in application drawings.


Wt/100 pcs: 55 Lbs (24.9 kg)

P2677

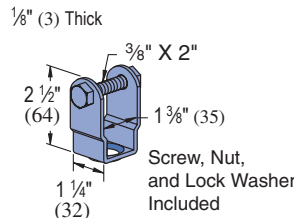

Clevis hanger to be used with P2676 or P2682 to provide angle adjustment and 15° (0.08 π) free swing for up to 1/2" (13) rod suspension. Order swivel nuts P2679-4, -6, or -8 as required.

Wt/100 pcs: 30 Lbs (13.6 kg)

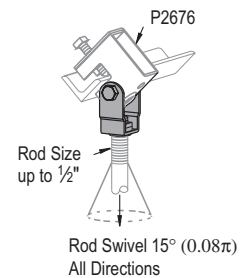


Design Load
500 Lbs (2.22 kN)

Note: When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

1 1/2" Channel
 Telesnut System
 Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P2674

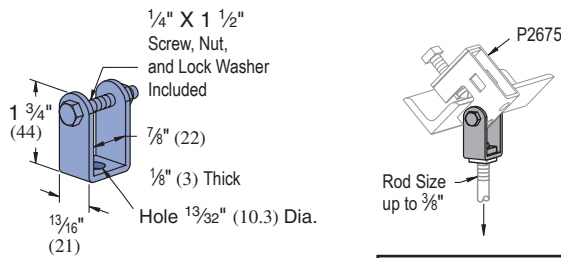


Clevis hanger to be used with P2675 to provide angle adjustment for up to 3/8" rod suspension as illustrated.

Wt/100 pcs: 17 Lbs (7.7 kg)

Design Load
250 Lbs (1.11 kN)

P2679-4, -6 & -8


SWIVEL NUT



Part Number	Thread Size	Wt/100 pcs Lbs (kg)
P2679-4	1/4"-20	4 1.8
P2679-6	3/8"-16	5 2.3
P2679-8	1/2"-13	6 2.7

- Use with P2676 and P2677.
- Order size as required.

P2398S, P2401S, P2403S, P2405S

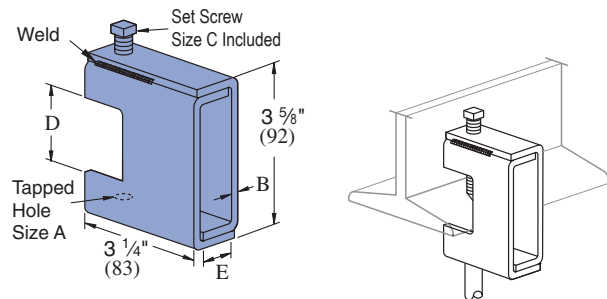


Weld is not continuous it is either 1 1/4" (32) - 1 3/4" (44) long or 2 spot welds. All welds are on the top and bottom.

Part Number	"A" In	"B" In (mm)	"C" In	"D" In (mm)	"E" In (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P2398S	1/4 - 20	1/8 3	3/8 x 2	1 21/32 42	7/8 22	109 49.4	800 3.56
P2401S	3/8 - 16	3/16 5	1/2 x 2	1 11/16 43	29/32 23	156 70.8	1,300 5.78
P2403S	1/2 - 13	1/4 6	1/2 x 2	1 11/16 43	15/16 24	201 91.2	1,900 8.45
P2405S	5/8 - 11	5/16 8	5/8 x 2	1 11/16 43	1 1/2 33	311 141.1	2,400 10.68

For beams between 3/4" (19) to 1 5/8" (41) thick flanges.


P1648S THRU P1653S

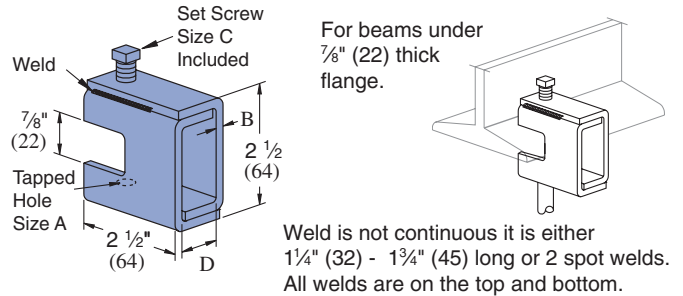

Part Number	"A" In	"B" In (mm)	"C" In	"D" In (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P1648S	1/4 - 20	1/8 3	3/8 x 1 1/2	7/8 22	67 30.4	650 2.89
P1649S	5/16 - 18	1/8 3	3/8 x 1 1/2	7/8 22	67 30.4	650 2.89
P1649AS	3/8 - 16	1/8 3	3/8 x 1 1/2	7/8 22	67 30.4	650 2.89
P1650S	3/8 - 16	3/16 5	1/2 x 1 1/2	15/16 24	100 45.4	1,100 4.89
P1650AS	1/2 - 13	3/16 5	1/2 x 1 1/2	15/16 24	100 45.4	1,100 4.89
P1651S	1/2 - 13	1/4 6	1/2 x 1 1/2	15/16 24	130 59.0	1,600 7.12
P1651AS	5/8 - 11	1/4 6	1/2 x 1 1/2	15/16 24	130 59.0	1,600 7.12
P1652S	5/8 - 11	5/16 8	5/8 x 1 1/2	1 1/2 33	160 72.6	2,400 10.68
P1653S	3/4 - 10	5/16 8	5/8 x 1 1/2	1 1/2 33	160 72.6	2,400 10.68

P1654A THRU P1661A

RETAINER STRAP

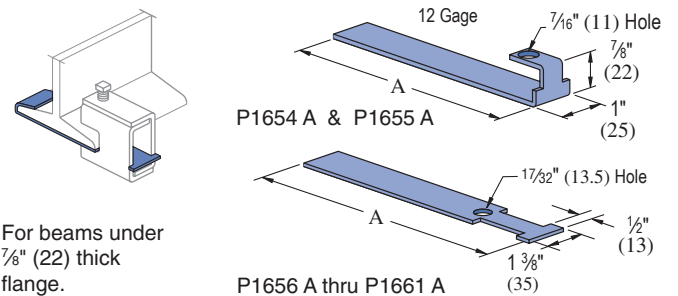


For beams under 7/8" (22) thick flange.

Strap Part Number	Flange Width In (mm)	"A" In (mm)	Wt/100 pcs Lbs (kg)	Beam Clamp Used With
P1654 A	6 152	7 178	25 11.3	P2675
P1655 A	9 229	10 254	34 15.4	P2675
P1656 A	6 152	9 229	35 15.9	P1648 S Thru P1651 AS, & P2398 S Series
P1657 A	9 229	12 305	47 21.3	
P1658 A	12 305	15 381	59 26.8	
P1659 A	6 152	9 229	33 15.0	P2676
P1660 A	9 229	12 305	45 20.4	P2676
P1661 A	12 305	15 381	57 25.9	P2676

Note: When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.



P1271S

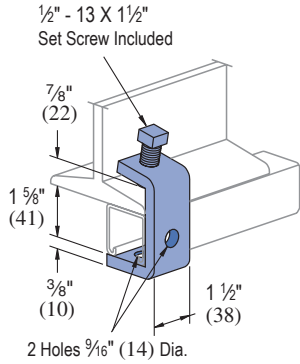


Note: Requires P1010 Channel Nut and bolt.

Design Load Each
500 Lbs (2.22 kN)
Use in Pairs Only

Wt/100 pcs: 95 Lbs (43.1 kg)



P1796S

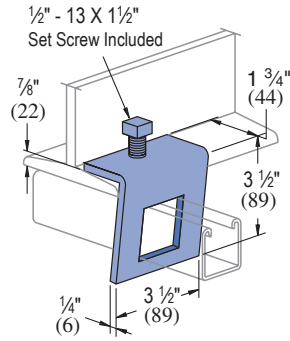

Design Load Each
500 Lbs (2.22 kN)
Use in Pairs Only

Wt/100 pcs: 91 Lbs (41.3 kg)


P2824-6,-9,-12

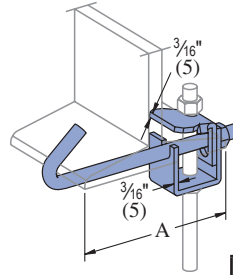

Clamp Requires
1/2" Diameter Rod and
2 Hex Nuts (Sold Separately)

Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P2824-6	2 1/2 - 6	125	500
	64 - 152	56.7	2.22
P2824-9	5 1/2 - 9	140	500
	140 - 229	63.5	2.22
P2824-12	8 1/2 - 12	171	500
	216 - 305	77.6	2.22

P2785

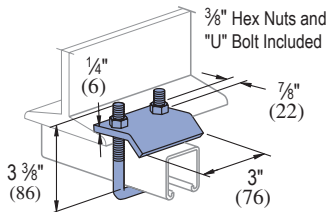


• For use with Beams up to 3/4" (19) Flanges and with Channels P1000, P1100, P2000, P3000, P3300, P3301, P4000, P4001, P4100, and P4101.

Design Load Each
1000 Lbs (4.45 kN)
Use in Pairs Only

Wt/100 pcs: 83 Lbs (37.6 kg)

P2786

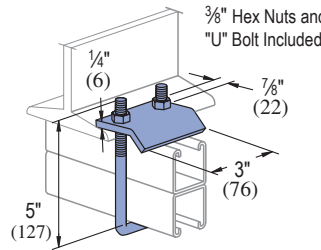


• For use with Beams up to 3/4" (19) Flanges and with Channels P1001, P1101, P2001, P3001, P5000, and P5500.

Design Load Each
1000 Lbs (4.45 kN)
Use in Pairs Only

Wt/100 pcs: 92 Lbs (41.7 kg)

P2787

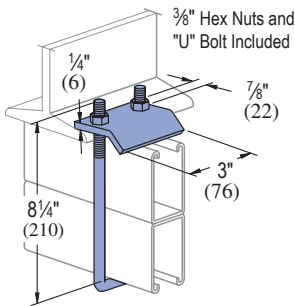


• For use with Beams up to 3/4" (19) Flanges and with Channels P5001 and P5501.

Design Load Each
1000 Lbs (4.45 kN)
Use in Pairs Only

Wt/100 pcs: 112 Lbs (50.8 kg)

P2867

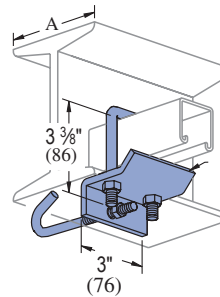


Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2867	4"-6"	142 (64.4)
P2867-9	6"-9"	151 (68.5)
P2867-12	9"-12"	160 (72.6)
P2867-15	12"-15"	170 (77.1)
P2867-18	15"-18"	179 (81.2)

• Includes: "J" Bolt, "U" Bolt and Hex Nuts.

• For use with Channels P1000, P1100, P2000, P3000, P3300, P3301, P4000, P4001, P4100, and P4101.

P2867A

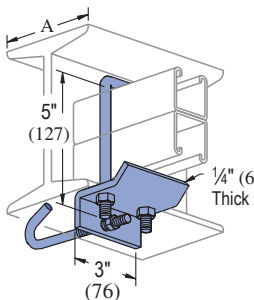


Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2867A	4"-6"	151 (68.5)
P2867A-9	6"-9"	157 (71.2)
P2867A-12	9"-12"	166 (75.3)
P2867A-15	12"-15"	176 (79.8)
P2867A-18	15"-18"	185 (83.9)

• Includes: "J" Bolt, "U" Bolt and Hex Nuts.

• For use with Channel P1001, P1101, P2001, P3001, P5000, and P5500.

P2867B

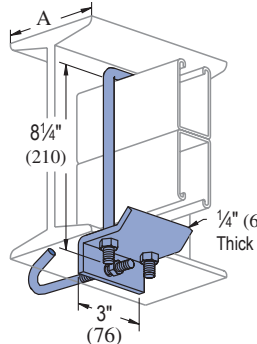


Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2867B	4"-6"	161 (73.0)
P2867B-9	6"-9"	167 (75.7)
P2867B-12	9"-12"	176 (79.8)
P2867B-15	12"-15"	186 (84.4)
P2867B-18	15"-18"	195 (88.5)

• Includes: "J" Bolt, "U" Bolt and Hex Nuts.

• For use with Channel P5001, and P5501.

Note: When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.


P2868

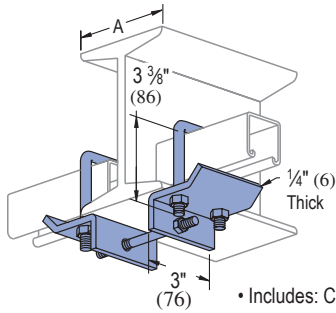

Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2868	4"-6"	282 (127.9)
P2868-9	6"-9"	289 (131.1)
P2868-12	9"-12"	296 (134.3)
P2868-15	12"-15"	304 (137.9)
P2868-18	15"-18"	311 (141.1)

- Includes: Center Rod, "U" Bolts and Hex Nuts.
- For use with Channels P1000, P1100, P2000, P3000, P3300, P3301, P4000, P4001, P4100, and P4101.


P2868A

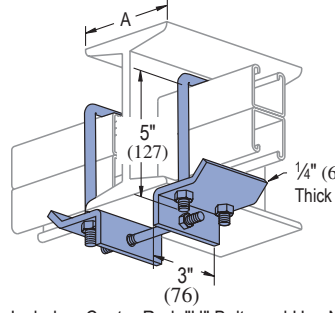

Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2868A	4"-6"	300 (136.1)
P2868A-9	6"-9"	307 (139.3)
P2868A-12	9"-12"	314 (142.2)
P2868A-15	12"-15"	322 (146.1)
P2868A-18	15"-18"	329 (149.2)

- Includes: Center Rod, "U" Bolts and Hex Nuts.
- For use with Channels P1001, P1101, P2001, P3001, P5000, and P5500.


P2868B

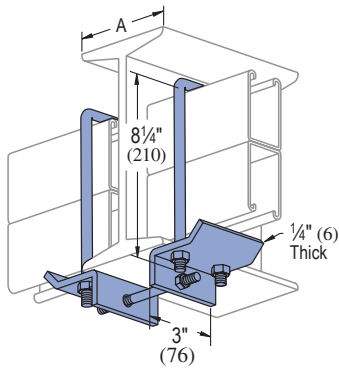

Part Number	Beam Size "A"	Wt/100 pcs Lbs (kg)
P2868B	4"-6"	320 (145.1)
P2868B-9	6"-9"	327 (148.3)
P2868B-12	9"-12"	334 (151.5)
P2868B-15	12"-15"	342 (155.1)
P2868B-18	15"-18"	349 (153.3)

- Includes: Center Rod, "U" Bolts and Hex Nuts.
- For use with Channels P5001, and P5501.


P2894



Material: Malleable Iron
 7/8" Maximum Flange Thickness
 Note: Tapped Hole on Top and Bottom

Part Number	Rod Size In	"A" In (mm)	"B" In (mm)	Load Ratings Lbs (kN)	Wt/100 pcs Lbs (kg)
P2894-25	1/4	1 1/8	1 1/4	150	23
		29	32	.67	10.4
P2894-37	3/8	2	2	350	95
		51	51	1.56	43.1
P2894-50	1/2	2 5/8	2 1/2	400	195
		67	64	1.78	88.5


P2893



Material: Steel
 Use With: 1/4" rod
 Load Rating: 75 lbs. (.33 kN)

Wt/100 pcs: 14 lbs. (6.4 kg)


P2895

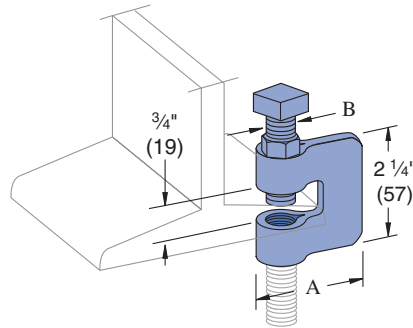

Material: Steel

Part Number	Rod Size In	"A" In (mm)	"B" In (mm)	Load Ratings Lbs (kN)	Wt/100 pcs Lbs (kg)
P2895-37	3/8	2 5/16	3/8	330	35
		59	10	1.47	15.9
P2895-50	1/2	2 1/4	1/2	380	41
		57	13	1.69	18.6
P2895-62	5/8	2 3/8	5/8	450	67
		60	16	2.00	30.4
P2895-75	3/4	2 1/4	1/2	500	72
		57	13	2.22	32.7

P2896

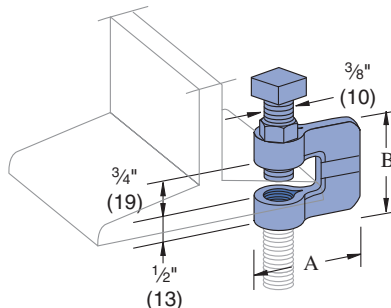

Material: Malleable Iron,
 Steel Set Screw

Part Number	Rod Size In	"A" In (mm)	"B" In (mm)	Load Ratings Lbs (kN)	Wt/100 pcs Lbs (kg)
P2896-37	3/8	1 11/16	1 1/4	400	38
		43	45	1.78	17.2
P2896-50	1/2	1 23/32	1 3/4	400	52
		44	45	1.78	23.6
P2896-62	5/8	1 15/16	2	450	68
		49	51	2.00	30.8
P2896-75	3/4	2 1/32	2	600	128
		52	51	2.67	58.1


Standard Dimensions for 1 3/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21mm); Hole Spacing - On Center: 1 1/8" (48mm); Width: 1 1/8" (41mm); Thickness: 1/4" (6mm)

Note: When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.



P1386

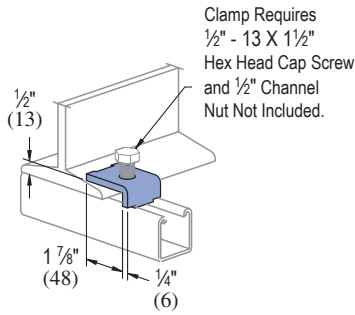


Clamp Requires
1/2" - 13 X 1 1/2"
Hex Head Cap Screw
and 1/2" Channel
Nut Not Included.

Channel Style	Design Load Each (Use in Pairs Only) Lbs (kN)
P1000	600 2.67
P1100	500 2.22
P2000	450 2.00

Wt/100 pcs: 27 Lbs (12.2 kg)

P1379S

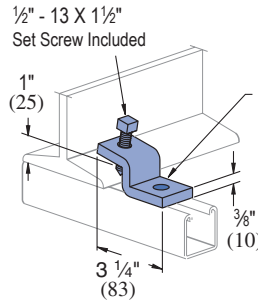


Clamp Requires
1/2" x 1 3/16"
Hex Head Cap Screw
and 1/2" Channel
Nut Not Included.

Channel Style	Design Load Each (Use in Pairs Only) Lbs (kN)
P1000	600 2.67
P1100	500 2.22
P2000	450 2.00

Wt/100 pcs: 75 Lbs (34.0kg)


P1272S, P1985S, P1986S

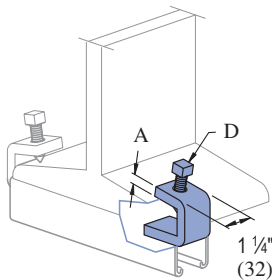

Part Number	"A" In (mm)	Flange Thickness In (mm)	"D" Set Screw Included	Wt/100 pcs Lbs (kg)	Design Load Per Pair (Use in Pairs Only) Lbs (kN)
P1272S	1/4 6	Up to 3/4 Up to 19	3/8-16 x 1 1/2	39 17.7	450 2.00
P1985S	3/8 10	Up to 3/4 Up to 19	1/2-13 x 1 1/2	62 28.1	1,000 4.45
P1986S	3/8 10	7/8 to 2 22 - 51	1/2-13 x 1 1/2	74 33.6	900 4.00


P3087

COLUMN INSERT

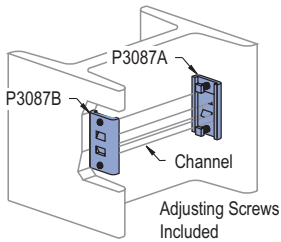

Channel Part Number	Design Pull Out Load Lbs (kN)	Design Slip Load Lbs (kN)
P1000	1,000 4.45	800 3.56
P1100	700 3.34	500 2.22
P2000	500 2.22	300 1.33

Safety factor of 3.




Wt/100 pcs: 136 Lbs (61.7 kg)

- Adjusting Screws Included.
- Unistrut channel not included.
- Part number P3087 consists of:
 - (1) piece P3087A,
 - (1) piece P3087B and
 - (2) set screws, 3/8" Dia.


P3088

COLUMN INSERT

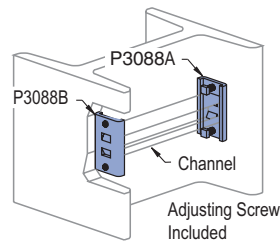

Channel Part Number	Design Pull Out Load Lbs (kN)	Design Slip Load Lbs (kN)
P3300	1,000 4.45	800 3.56
P4100	700 3.11	500 2.22
P4000	500 2.22	300 1.33

Safety factor of 3.




Wt/100 pcs: 120 Lbs (54.4 kg)

- Adjusting Screws Included.
- Unistrut channel not included.
- Part number P3088 consists of:
 - (1) piece P3088A,
 - (1) piece P3088B and
 - (2) set screws, 3/8" Dia.

PLLC025

FLANGE CLAMP

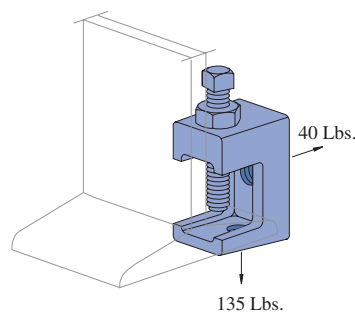

Cup point set screw and lock nut included.

Set Screw Torque = 3 Ft-Lb
Lock Nut Torque = 3.5 Ft-Lb

X, Y are threaded holes.

Part Number	Rod Size	"Z" Set Screw Size	Wt/100 pcs Lbs (kg)
PLLC025	1/4"	1/4"	16 (7.3)




Part Number	Dimensions				
	"S" In (mm)	"T" In (mm)	"U" In (mm)	"V", "W" In (mm)	"X", "Y" In
PLLC025	5/8 16	1 25	1 1/16 37	3/4 19	1/4 X 20

Material: Malleable Iron.

Note: When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

PFL037 THRU PFL050T

FLANGE CLAMP

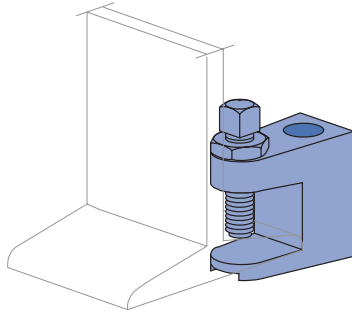

Material: Malleable Iron.

Cup point set screw and lock nut included.

Set Screw Torque = 6 Ft-Lb
Lock Nut Torque = 16 Ft-Lb



Safety Factor: 5

Part Number	Type of Hole	Rod Size	"Z" Set Screw Size	Wt/100 pcs Lbs (kg)	Max. Allowable Load Lbs (kN)
PFL037	Clear	3/8"	3/8"	28 (12.7)	540 (2.40)
PFL037T	Tapped	3/8"	3/8"	28 (12.7)	540 (2.40)
PFL050	Clear	1/2"	3/8"	40 (18.1)	700 (3.11)
PFL050T	Tapped	1/2"	3/8"	40 (18.1)	700 (3.11)

Part Number	Dimensions						
	"T" In (mm)	"U" In (mm)	"V" In (mm)	"W" In (mm)	"X" In (mm)	"Y" In (mm)	
PFL037	1 1/16	1 3/16	7/8	3/4	1	7/16	
	43	40	22	19	25	11	
PFL037T	1 1/16	1 3/16	7/8	3/4	1	3/8	Tapped Hole
	43	40	22	19	25		
PFL050	2	1 23/32	1	29/32	1 3/32	9/16	
	51	44	25	23	28	14	
PFL050T	2	1 23/32	1	29/32	1 3/32	1/2	Tapped Hole
	51	44	25	23	28		

PLF3037 THRU PLF3075

FLANGE CLAMP

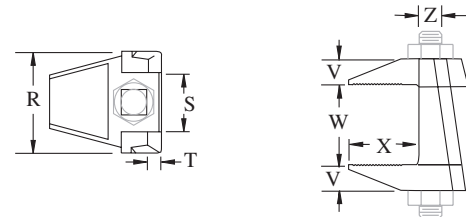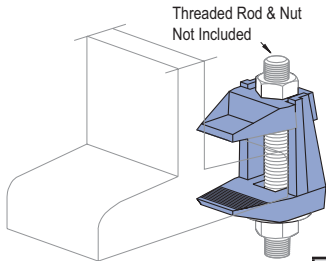

Safety Factor: 4



Material: Malleable Iron.

Part Number	Rod Size	Wt/100 pcs Lbs (kg)	Max. Allowable Load Lbs (kN)	Torque Ft-Lbs
PLF3037	3/8"	53	270	15
		24	1.20	
PLF3050	1/2"	91	450	29
		41	2.00	
PLF3062	5/8"	186	900	69
		84	4.00	
PLF3075	3/4"	334	1,350	130
		152	6.01	

Part Number	Dimensions					
	"X" In (mm)	"W" In (mm)	"V" In (mm)	"T" In (mm)	"R" In (mm)	"S" In (mm)
PLF3037	1	0 - 1 1/16	3/8	9/32	1 1/2	7/8
	25	0 - 30	10	7	38	22
PLF3050	1 3/8	0 - 1 3/16	1/2	1 1/32	1 5/16	1 5/32
	35	0 - 40	13	9	49	29
PLF3062	1 13/16	0 - 2 3/16	5/8	1/2	2 1 1/2	1 1/16
	46	0 - 56	16	13	60	37
PLF3075	2 3/16	0 - 1 3/4	3/4	5/8	3	1 3/4
	56	0 - 45	19	16	76	45

PLF9037 THRU PLF9100

FLANGE CLAMP

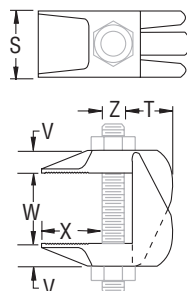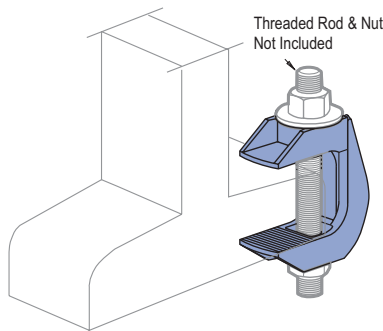

Material: Malleable Iron.

Safety Factor: 5

Part Number	Rod Size	Wt/100 pcs Lbs (kg)	Max. Allowable Load Lbs (kN)	Torque Ft-Lbs	"X"	"W"	"V"	"T"	"S"
					In (mm)	In (mm)	In (mm)	In (mm)	In (mm)
PLF9037	3/8"	55	440	15	1	3/4 - 1 1/16	1/2	3/4	1
		24.9	1.96		25	19 - 43	13	19	25
PLF9050	1/2"	122	630	29	1 3/8	1 - 2 3/8	2 1/32	1 5/16	1 3/16
		55.3	2.80		35	25 - 60	17	24	30
PLF9062	5/8"	200	1,260	69	1 11/16	1 1/8 - 2 3/4	1 3/16	1 1/8	1 3/8
		90.7	5.60		43	29 - 70	21	29	35
PLF9075	3/4"	367	1,880	131	2	1 1/4 - 3 1/4	1	1 3/8	1 3/4
		166.5	8.36		51	32 - 183	25	35	45
PLF9100	1"	1,101	3,150	173	3	1 3/4 - 3 3/4	1 1/2	2 1/16	2 1/2
		499.4	14.01		76	45 - 95	38	56	64


Note: When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping. Clamps are designed to be used with W, M, S & HP Shape beams, Standard C & Misc. MC Channels, Angles & Structural Tees. Clamps must be used in pairs where indicated. For beam clamps with HG finish, standard hardware is EG finish. For optional stainless steel hardware, please contact the factory for availability.

1 5/8" Channel
Telesrnut System
Nuts & Hardware
General Fittings
Pipe/Conduit Supports
Electrical Fittings
Concrete Inserts
1 1/2" Framing System
1 3/16" Framing System
Fiberglass System
Special Metals
PrimeAngle System
Product Index



P1834

CHANNEL TROLLEY SUPPORT

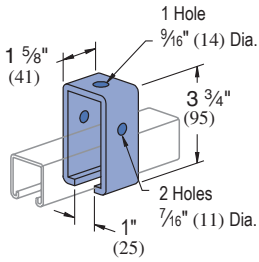


Requires $\frac{3}{8}$ " x $2\frac{1}{2}$ " Bolt and $\frac{3}{8}$ " Nut (not included)

Design Load
1200 Lbs (5.34 kN)

Wt/100 pcs: 102 Lbs (46.3 kg)

P1834A

CHANNEL TROLLEY SUPPORT

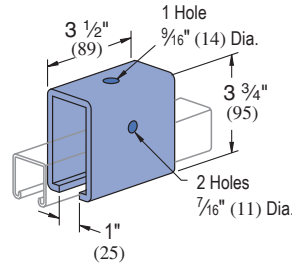


Requires $\frac{3}{8}$ " x $2\frac{1}{2}$ " Bolt and $\frac{3}{8}$ " Nut (not included)

Design Load
2500 Lbs (11.12 kN)

Wt/100 pcs: 220 Lbs (99.8 kg)


P2749*, P2749N†

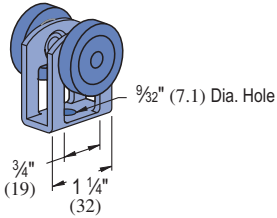

Clevis Material:
12 gauge.


*Wheel bearings are stainless steel, and should not be lubricated.

† "N" indicates acetal wheels.

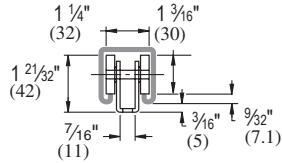

Part Number	Design Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2749	50 .22	21 9.5
P2749N	10 .04	13 5.9


P2751*, P2751 N†

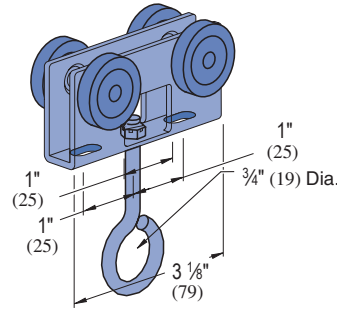

Clevis Material: 12 gauge.


*Wheel bearings are stainless steel, and should not be lubricated.

† "N" indicates acetal wheels.

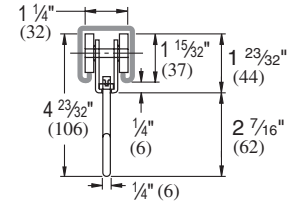

Part Number	Design Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2751	100 .44	63 28.6
P2751N	20 .09	40 18.1


P2750*, P2750N†

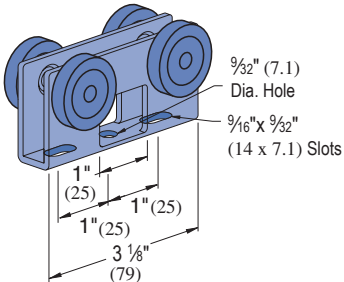

Clevis Material: 12 gauge.


*Wheel bearings are stainless steel, and should not be lubricated.

† "N" indicates acetal wheels.

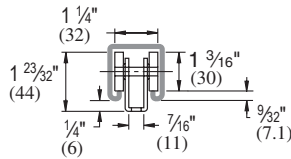


Part Number	Design Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2750	100 .44	55 24.9
P2750N	20 .09	32 14.5

P2950

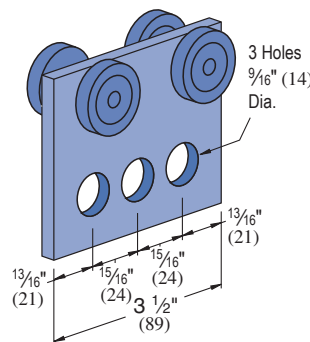


Wheel bearings are stainless steel. Do not lubricate.



FPM	RPM	Design Load In P1000 Lbs (kN)
180	600	300
90	300	450
30	100	600
		2.67

P2949

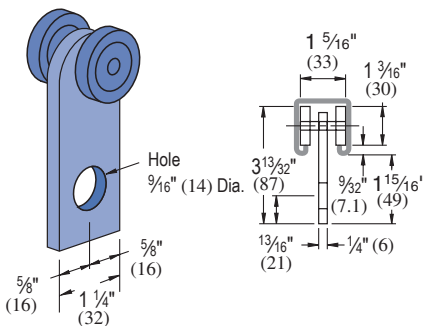

Design Load In P1000		
FPM	RPM	Lbs (kN)
180	600	150 .67
90	300	225 1.00
30	100	437 1.94

Wheel bearings are stainless steel. Do not lubricate.

Wt/100 pcs: 46 Lbs (20.9 kg)


Wt/100 pcs: 110 Lbs (49.9 kg)

Standard Dimensions for 1 5/8" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)

P2354 R-L, P2355 R-L

REEL RACK SUPPORTS FOR 1 1/4" & 2" PIPE

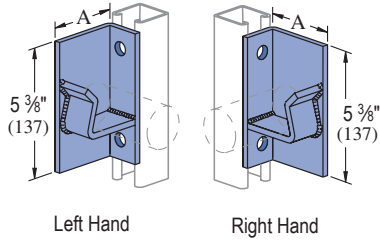

Vertical Channel	Max. Allowable Load
Part No. Gauge	Lbs (kN)
P1000 12	3,000 (13.34)
P1100 14	2,000 (8.90)
P2000 16	2,000 (8.90)


Part Number	"A" In (mm)	Std. Pipe Size In (mm)	Wt/100 pcs Lbs (kg)
P2354 R-L	3	1 1/4	220
	76	32	99.8
P2355 R-L	3 5/8	2	114.3

P1204 THRU P1208


WALL LADDER BRACKET

P2454

DOUBLE PIPE AXLE SUPPORT

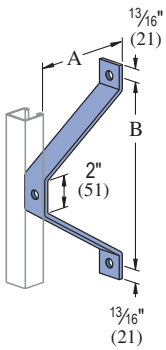

Part Number	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P1204	2 1/2 60	6 152	113 51.3
P1205	4 3/8 111	8 203	164 74.4
P1206	6 3/8 162	10 254	216 98.0
P1207	8 3/8 213	12 305	267 121.1
P1208	10 3/8 264	14 356	318 144.2

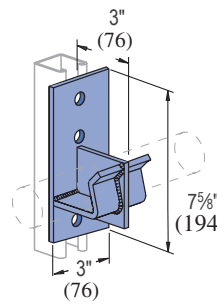

Load Rating 4,000 Lbs (17.79 kN)

For 1 1/4" (32) Standard Pipe


Wt/100 pcs: 310 Lbs (140.6 kg)

P1201, P1202, P1203


LADDER RUNG

P2470-50, -75, -100

PIPE COUPLING FITTING

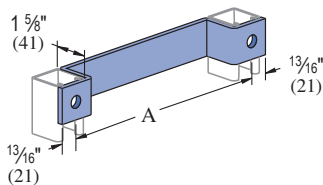

Part Number	"A" In (mm)	Wt/100 pcs Lbs (kg)
P1201	12 305	186 84.4
P1202	15 381	221 100.2
P1203	18 457	254 115.2




Pipe Coupling		
Part Number	Size In	Wt/100 pcs Lbs (kg)
P2470-50	1/2	77 (34.9)
P2470-75	3/4	93 (42.2)
P2470-100	1	103 (46.7)

P1944


45° (.25π) STAIR TREAD SUPPORT

P2655

37 1/2° (.21π) STAIR TREAD SUPPORT

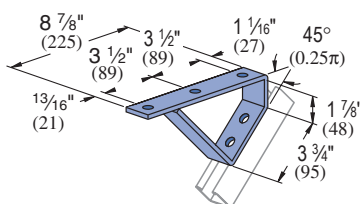

Wt/100 pcs: 220 Lbs (99.8 kg)

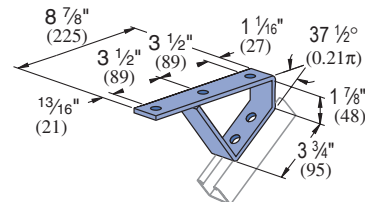

Wt/100 pcs: 213 Lbs (96.6 kg)


Standard Dimensions for 1 1/2" (41mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 13/16" (21mm); Hole Spacing - On Center: 1 7/8" (48mm); Width: 1 1/2" (41mm); Thickness: 1/4" (6mm)

Note : When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping.




P1843 ADJ. HINGE CONNECTION




Wt/100 pcs: 68 Lbs (30.8 kg)

P1354A ADJ. HINGE CONNECTION

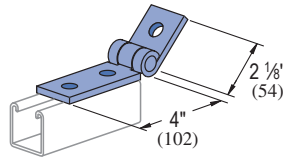

Wt/100 pcs: 89 Lbs (40.4 kg)


P1354 ADJ. HINGE CONNECTION

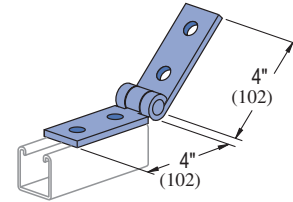

Wt/100 pcs: 109 Lbs (49.4 kg)

SPF® 100

SEISMIC PIVOT FITTINGS

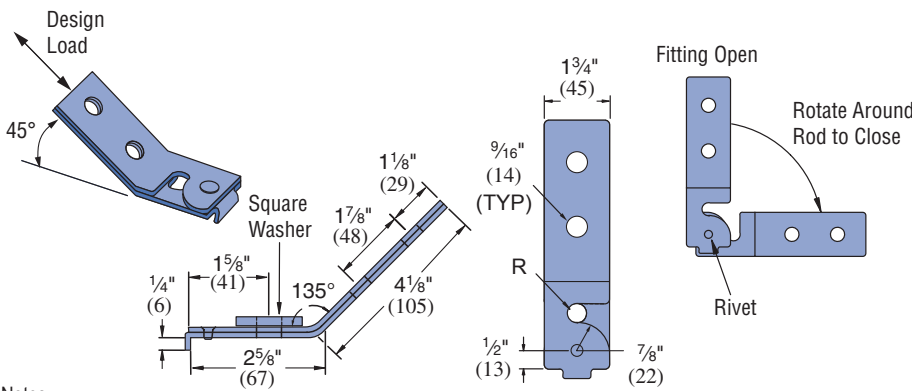

Notes:

1. Design load is limited to slip capacity of a channel nut at hole "R".
2. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications.
3. For retrofit application, engineer of record must verify.
4. Patented.
5. Square washer provided with fitting.
6. When a hanger rod is thru-bolted (in lieu of channel nut installation), higher transverse loads may be transmitted due to the higher allowed rod shear loads compared to channel nut slip values. This higher load may be used with verification through engineering calculations.

Part Number	Rod Size In (mm)	"R" - Hole Diameter In (mm)	Design Load Lbs (KN)
SPF 100-037	3/8 10	7/16 11	1,400 6.23
SPF 100-050	1/2 13	9/16 14	2,100 9.34
SPF 100-062	5/8 16	11/16 18	2,100 9.34
SPF 100-075	3/4 19	13/16 21	2,400 10.68


Safety Factor = 3.0

FINISH

Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

SPF® 200

ADJUSTABLE SEISMIC PIVOT FITTINGS

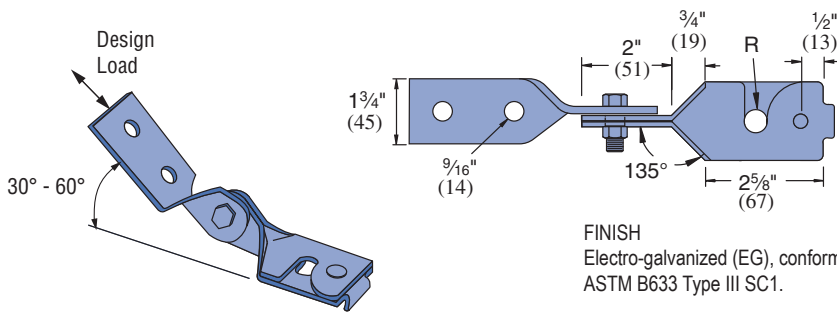

FINISH


Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

Part Number	Rod Size In (mm)	"R" - Hole Diameter In (mm)	Design Load Lbs (KN)
SPF 200-037	3/8 10	7/16 11	1,400 6.23
SPF 200-050	1/2 13	9/16 14	2,100 9.34
SPF 200-062	5/8 16	11/16 18	2,100 9.34
SPF 200-075	3/4 19	13/16 21	2,400 10.68

Safety Factor = 3.0


Notes:

1. Design load is limited to slip capacity of a channel nut at hole "R".
2. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications at 45° from horizontal.
3. For retrofit application, engineer of record must verify.
4. Patented.
5. Square washer provided with fitting.
6. When a hanger rod is thru-bolted (in lieu of channel nut installation), higher transverse loads may be transmitted due to the higher allowed rod shear loads compared to channel nut slip values. This higher load may be used with verification through engineering calculations.

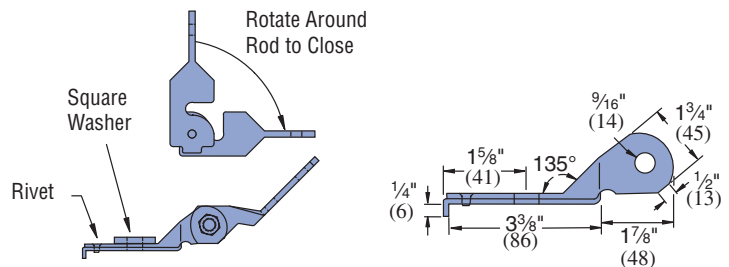

SPF® 300

SEISMIC PIVOT FITTINGS

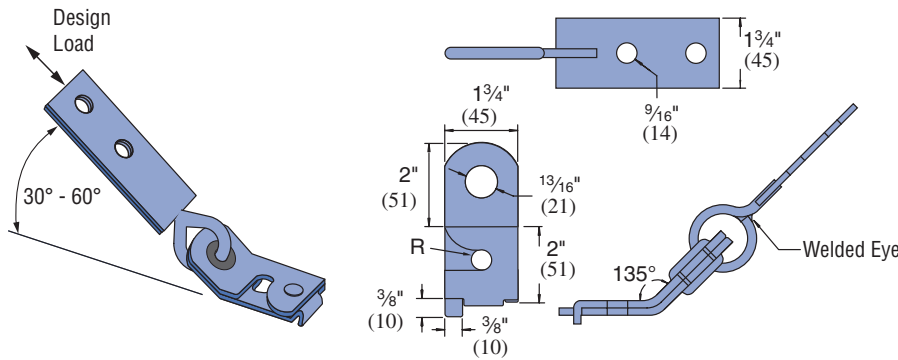

Part Number	Rod Size In (mm)	"R" - Hole Diameter In (mm)	Design Load Lbs (kN)
SPF 300-037	3/8 10	7/16 11	1,400 6.23
SPF 300-050	1/2 13	9/16 14	2,100 9.34
SPF 300-062	5/8 16	11/16 18	2,100 9.34
SPF 300-075	3/4 19	13/16 21	2,400 10.68

Safety Factor = 3.0
FINISH
Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.


Notes:

- Design load is limited to slip capacity of a channel nut at hole "R".
- Allowable loads have been determined by the manufacturers testing, analysis and technical specifications at 45° from horizontal.
- For retrofit application, engineer of record must verify.
- Patented.
- Square washer provided with fitting.
- When a hanger rod is thru-bolted (in lieu of channel nut installation), higher transverse loads may be transmitted due to the higher allowed rod shear loads compared to channel nut slip values. This higher load may be used with verification through engineering calculations.



SPF® 400

SEISMIC PIVOT FITTINGS

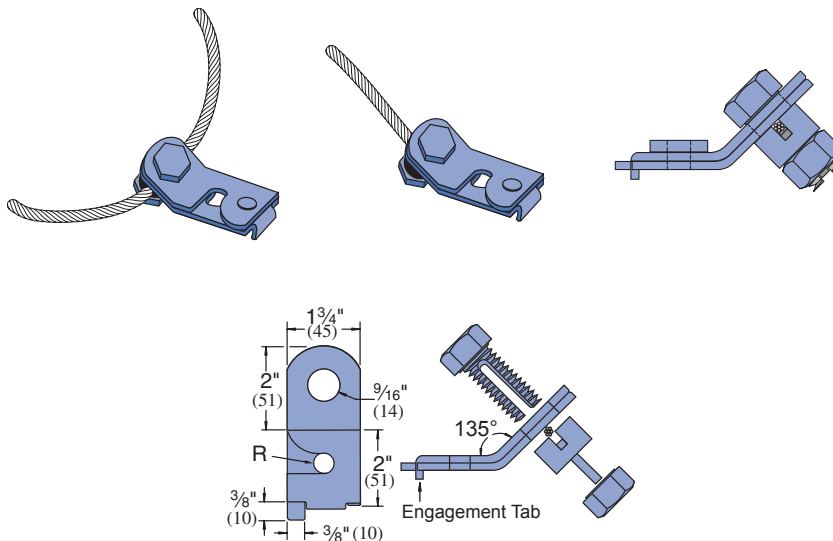


Part Number	Rod Size In (mm)	"R" - Hole Diameter In (mm)
SPF 400-037	3/8 10	7/16 11
SPF 400-050	1/2 13	9/16 14
SPF 400-062	5/8 16	11/16 18
SPF 400-075	3/4 19	13/16 21

FINISH
Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

Wire Rope Diameter In (mm)	Horizontal Design Load		
	4-Way Splayed		Single Cable Transverse
	Transverse lbs (kN)	Longitudinal lbs (kN)	lbs (kN)
3/16	1050	1116	650
5	4.67	4.96	2.89

Notes:

- Allowable loads have been determined by the manufacturers testing, analysis and technical specifications.
- Galvanized wire rope, 7 x 19 IWSC, RHRL (Prestretched).
- Torque on nut/spacer: 50 ft-lbs.
- Safety Factor of 3 for prestretched cable..

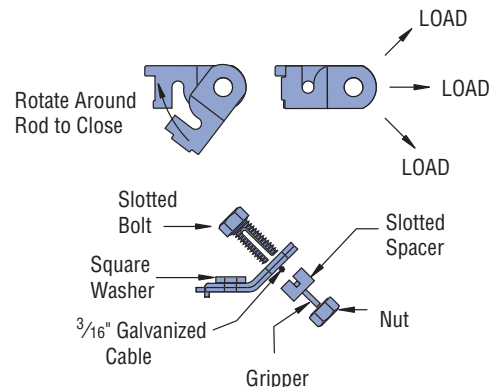


1 1/2" Channel
1 1/2" System
Nuts & Hardware
General Fittings
Pipe/Conduit Supports
Electrical Fittings
Concrete Inserts
1 1/2" Framing System
1 3/16" Framing System
Fiberglass System
Special Metals
PrimeAngle System
Product Index



LS 410

SEISMIC PIVOT FITTINGS

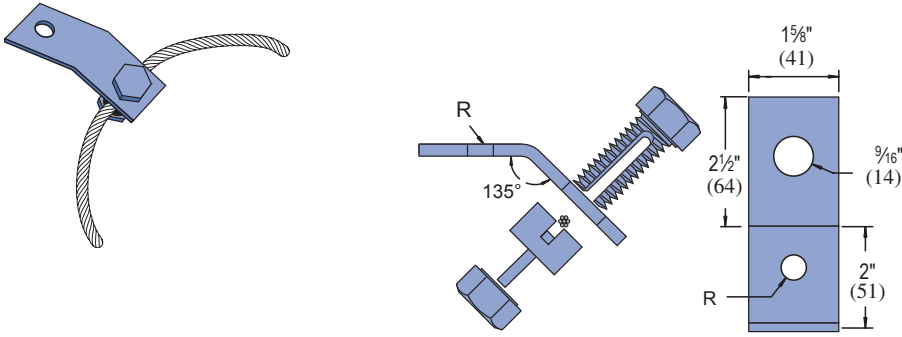


Part Number	Anchor Size In (mm)	"R" - Hole Diameter In (mm)
LS 410-037	3/8 10	7/16 11
LS 410-050	1/2 13	9/16 14
LS 410-062	5/8 16	11/16 18
LS 410-075	3/4 19	13/16 21

FINISH
Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

- Note:
1. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications.
 2. For retrofit application, engineer of record must verify.
 3. Torque on nut/spacer: 50 ft-lbs.
 4. Square washer provided with fitting.
 5. Loads are the same as the SPF 400

LS 500

SEISMIC PIVOT FITTINGS

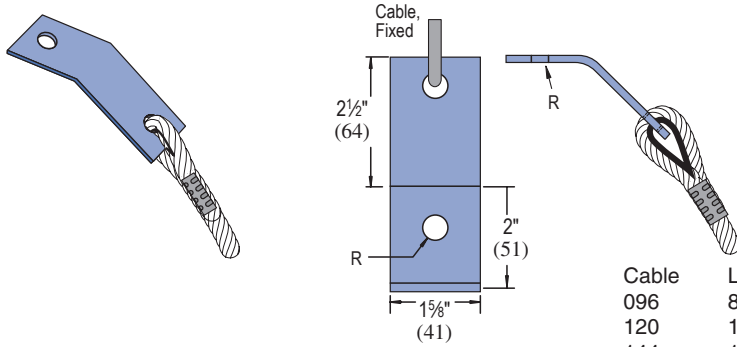

Example
LS500-037-096



Cable	Length
096	8' (2.4M)
120	10' (3.0M)
144	12' (3.6M)
180	15' (4.5M)
240	20' (6.1M)
300	25' (7.6M)
360	30' (9.1M)
480	40' (12.2M)


Part Number	Anchor Size In (mm)	"R" - Hole Diameter In (mm)
LS 500-037	3/8 10	7/16 11
LS 500-050	1/2 13	9/16 14
LS 500-062	5/8 16	11/16 18
LS 500-075	3/4 19	13/16 21

FINISH
Electro-galvanized (EG), conforming to ASTM B633 Type III SC1.

- Note:
1. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications.
 2. For retrofit application, engineer of record must verify.
 3. Patented
 4. Square washer provided with fitting.
 5. Loads are the same as the SPF 400



PIPE/CONDUIT SUPPORTS

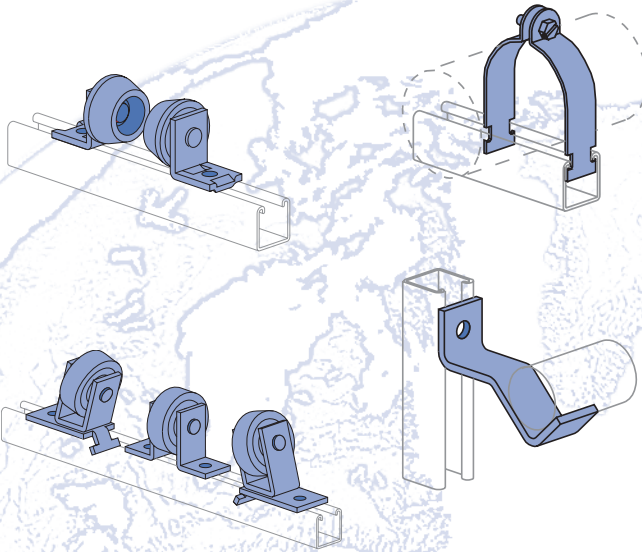

Pipe/Conduit Clamps 102-105

Unicushion® 106



Pipe & Tubing (Cush-A-Clamp®) Clamps 107-110

Pipe Hangers 111

Pipe Rollers 111-112

Pipe Brackets 113

Reference Tables 114-120

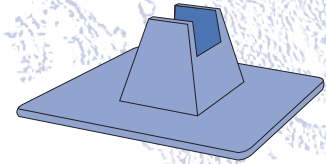

MATERIAL

Unistrut pipe clamps, unless noted, are punch-press made from hot-rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A1008, A575, A576, A635, or A36. The fitting steel also meets the physical requirements of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

Many items are also available in stainless steel.

Consult factory for ordering information.

FINISHES

Pipe supports are available in:

- Electro-galvanized (EG), conforming to ASTM B633 Type III SC1
- Hot-dipped galvanized (HG), conforming to ASTM A123 or A153 (hardware)
- Perma-Green III (GR), and plain (PL).

APPLICATION

Unistrut pipe clamps, pipe hangers, brackets and rollers are designed for the support of electrical and mechanical services. Supports to meet nearly every requirement can be attained using Unistrut Metal Framing components.

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

DESIGN BOLT TORQUE

BOLT SIZE	1/4"-20	5/16"-18	3/8"-16	1/2"-13	5/8"-11	3/4"-10
Rec.Torque Ft/Lbs (N*m)	6 (8)	11 (15)	19 (26)	50 (68)	100 (136)	125 (170)
Max Torque Ft/Lbs (N*m)	7 (9)	15 (20)	25 (34)	70 (95)	125 (170)	135 (183)

Note: When tightening 1/4" screws used with a two piece pipe clamp, a torque of 5 foot pounds (60 inch-pounds) should be used.

DESIGN LOAD



Design load data, where shown, is based on the ultimate strength of the connection with a safety factor of 5.0, unless otherwise noted.

Pipe Clamps In Special Materials (P1109, P1211, P1425, P2024 Series)


Material	Add Suffix to P/N	Example
Steel Strap, Everdur Hardware	E	P1109 E
Copper Coated Steel Strap & Hardware	CC	P1109 CC
Aluminum Material: Malleable Iron.	AL	P1109 AL
Stainless Steel 304 or 316	SS or ST	P1109 SS
Plastic Coated Steel Straps	PC	P1109 PC





Pipe & Conduit Clamps

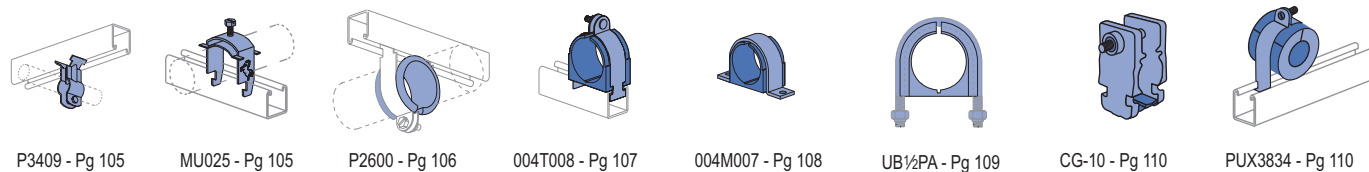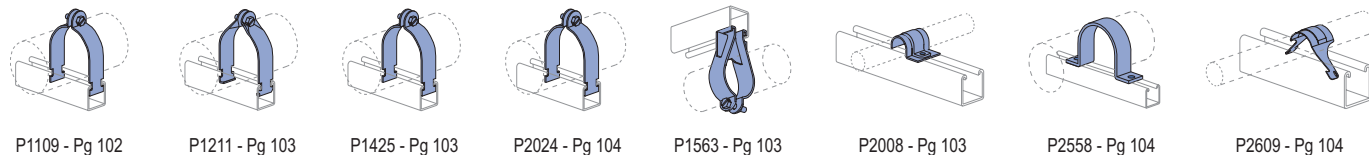

Pipe Rollers

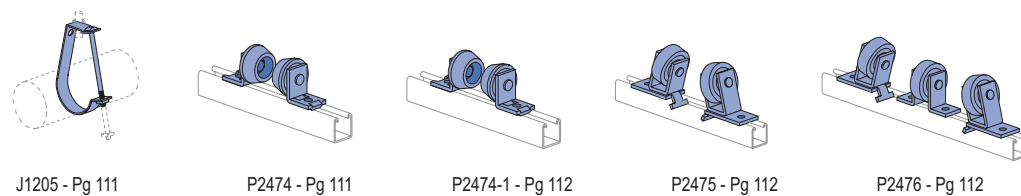


Pipe Brackets

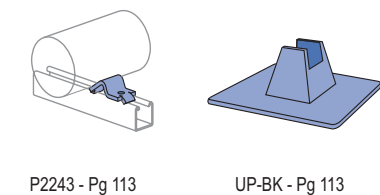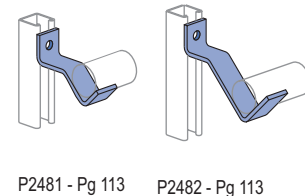

P1109 THRU P1126

PIPE CLAMPS FOR RIGID STEEL CONDUIT

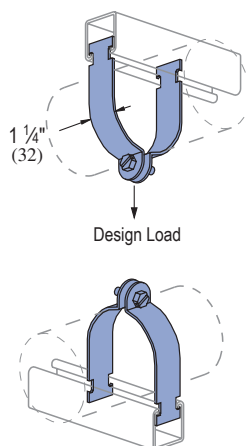

Part No.	Conduit Size In	O.D. Size In (mm)	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P1109	¾	0.675	16	10	400
		17.1	1.5	4.5	1.78
P1111	½	0.840	16	11	400
		21.3	1.5	5.0	1.78
P1112	¾	1.050	14	15	600
		26.7	1.9	6.8	2.67
P1113	1	1.315	14	17	600
		33.4	1.9	7.7	2.67
P1114	1¼	1.660	14	19	600
		42.2	1.9	8.6	2.67
P1115	1½	1.900	12	29	800
		48.3	2.7	13.2	3.56
P1117	2	2.375	12	34	800
		60.3	2.7	15.4	3.56


Part No.	Conduit Size In	O.D. Size In (mm)	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P1118	2½	2.875	12	40	800
		73.0	2.7	18.1	3.56
P1119	3	3.500	12	47	800
		88.9	2.7	21.3	3.56
P1120	3½	4.000	11	62	1,000
		101.6	3.0	28.1	4.45
P1121	4	4.500	11	67	1,000
		114.3	3.0	30.4	4.45
P1123	5	5.563	11	80	1,000
		141.3	3.0	36.3	4.45
P1124	6	6.625	10	102	1,000
		168.3	3.4	46.3	4.45
P1126	8	8.625	10	130	1,000
		219.1	3.4	59.0	4.45

Slotted hex head screw and nut included with EG or HG Finish.

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P1425 THRU P1431

PIPE CLAMPS FOR THIN WALL CONDUIT (E.M.T.)

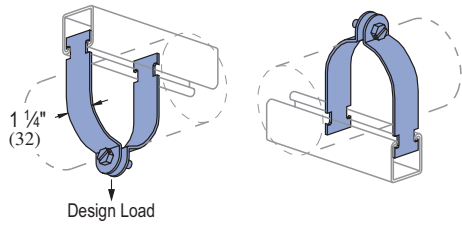


Slotted hex head screw and nut included with EG or HG Finish.

Part No.	Conduit Size In (mm)	O.D. Size In (mm)	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P1425	3/8 10	0.577 14.7	16 1.5	9 4.1	400 1.78
P1426	1/2 13	0.706 17.9	16 1.5	11 5.0	400 1.78
P1427	3/4 19	0.922 23.4	16 1.5	12 5.4	400 1.78
P1428	1 25	1.163 29.5	14 1.9	15 6.8	600 2.67
P1429	1 1/4 32	1.510 38.4	14 1.9	18 8.2	600 2.67
P1430	1 1/2 38	1.740 44.2	12 2.7	29 13.2	800 3.56
P1431	2 51	2.197 55.8	12 2.7	33 15.0	800 3.56
P1118	2 1/2 64	2.875 73.0	12 2.7	40 18.1	800 3.56
P1119	3 76	3.500 88.9	12 2.7	47 21.3	800 3.56
P1120	3 1/2 89	4.000 101.6	11 3.0	62 28.1	1,000 4.45
P1121	4 102	4.500 114.3	11 3.0	67 30.4	1,000 4.45

P1211 THRU P1217

UNIVERSAL CLAMPS FOR RIGID OR THINWALL CONDUIT

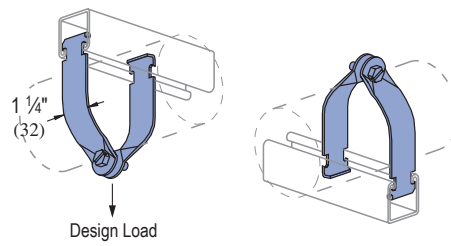


Slotted hex head screw and nut included with EG or HG Finish.

Part No.	Conduit Size In (mm)	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P1211	1/2 13	16 1.5	10 4.5	400 1.78
P1212	3/4 19	16 1.5	11 5.0	400 1.78
P1213	1 25	16 1.5	12 5.4	400 1.78
P1214	1 1/4 32	14 1.9	18 8.2	600 2.67
P1215	1 1/2 38	14 1.9	20 9.1	600 2.67
P1217	2 51	14 1.9	22 10.0	600 2.67

P1563 THRU P1573

PARALLEL CLAMPS FOR RIGID CONDUIT AND PIPE

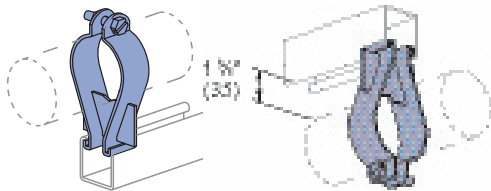


Slotted hex head screw and nut included.

Finish: Electro-galvanized.

Part No.	Pipe Size In (mm)	O.D. Size In (mm)	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)
P1563	3/8 10	0.675 17.1	14 1.9	27 12.2
P1564	1/2 13	0.840 21.3	14 1.9	29 13.2
P1565	3/4 19	1.050 26.7	14 1.9	30 13.6
P1566	1 25	1.315 33.4	14 1.9	31 14.1
P1567	1 1/4 32	1.660 42.2	14 1.9	38 17.2
P1568	1 1/2 38	1.900 48.3	12 2.7	40 18.1
P1569	2 51	2.375 60.3	12 2.7	47 21.3
P1570	2 1/2 64	2.875 73.0	12 2.7	66 29.9
P1571	3 76	3.500 88.9	12 2.7	78 35.4
P1572	3 1/2 89	4.000 101.6	12 2.7	87 39.5
P1573	4 102	4.500 114.3	12 2.7	90 40.8

P2008 THRU P2020

ONE HOLE CLAMP FOR O.D. TUBING

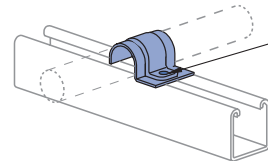

1/4" X 3/4" Round Head Machine Screw and Channel Nut Not Included


Finish: Electro-galvanized and Aluminum

Part No.	O.D. Tube Size In (mm)	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)
P2008	1/4 6	16 1.5	4 1.8
P2009	5/16 8	16 1.5	5 2.3
P2010	3/8 10	16 1.5	5 2.3
P2012	1/2 13	16 1.5	6 2.7
P2014	5/8 16	14 1.9	8 3.6
P2016	3/4 19	14 1.9	9 4.1
P2018	7/8 22	14 1.9	10 4.5
P2020	1 25	14 1.9	11 5.0




P2024 THRU P2070-84

PIPE CLAMPS FOR O.D. TUBING



- P2024 - P2029 16 ga.
- P2030 - P2035 14 ga.
- P2037 - P2052 12 ga.
- P2053 - P2066 11 ga.
- P2067 - P2070-84 10 ga.




Slotted hex head screw and nut included with EG or HG Finish.

Part Number	O.D. Size In (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P2024	1/4 (6)	8 (3.6)	400 (1.78)
P2025	3/8 (10)	8 (3.6)	
P2026	1/2 (13)	9 (4.1)	
P2027	5/8 (16)	10 (4.5)	
P2028	3/4 (19)	11 (5.0)	
P2029	7/8 (22)	12 (5.4)	600 (2.67)
P2030	1 (25)	14 (6.4)	
P2031	1 1/8 (29)	15 (6.8)	
P2032	1 1/4 (32)	16 (7.3)	
P2033	1 3/8 (35)	17 (7.7)	
P2034	1 1/2 (38)	18 (8.2)	800 (3.56)
P2035	1 5/8 (41)	19 (8.6)	
P1430	1 3/4 (45)	29 (13.2)	
P2037	1 7/8 (48)	28 (12.7)	
P2038	2 (51)	31 (14.1)	
P2039	2 1/8 (54)	32 (14.5)	
P2040	2 1/4 (57)	33 (15)	
P1117	2 3/8 (60)	34 (15.4)	
P2042	2 1/2 (64)	35 (15.9)	
P2043	2 5/8 (67)	37 (16.8)	
P2044	2 3/4 (70)	38 (17.2)	
P1118	2 7/8 (73)	40 (18.1)	
P2046	3 (76)	41 (18.6)	
P2047	3 1/8 (79)	43 (19.5)	
P2048	3 1/4 (83)	45 (20.4)	
P2049	3 3/8 (86)	46 (20.9)	
P1119	3 1/2 (89)	47 (21.3)	1000 (4.45)
P2051	3 5/8 (92)	56 (25.4)	
P2052	3 3/4 (95)	58 (26.3)	
P2053	3 7/8 (98)	60 (27.2)	
P1120	4 (102)	62 (28.1)	
P2055	4 1/8 (105)	62 (28.1)	
P2056	4 1/4 (108)	64 (29.0)	
P2057	4 3/8 (111)	66 (29.9)	
P1121	4 1/2 (114)	67 (30.4)	
P2059	4 5/8 (118)	70 (31.8)	
P2060	4 3/4 (121)	72 (32.7)	


Part Number	O.D. Size In (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P2061	4 7/8 (124)	73 (33.1)	1000 (4.45)
P2062	5 (127)	74 (33.6)	
P2063	5 1/8 (130)	76 (34.5)	
P2064	5 1/4 (133)	77 (34.9)	
P2065	5 3/8 (137)	78 (35.4)	
P2066	5 1/2 (140)	79 (35.8)	
P2067	5 5/8 (143)	88 (39.9)	
P2068	5 3/4 (146)	90 (40.8)	
P2069	5 7/8 (149)	92 (41.7)	
P2070	6 (152)	94 (42.6)	
P2070-61	6 1/8 (156)	96 (43.5)	
P2070-62	6 1/4 (159)	98 (44.5)	
P2070-63	6 3/8 (162)	99 (44.9)	
P2070-64	6 1/2 (165)	100 (45.4)	
P1124	6 5/8 (168)	102 (46.3)	
P2070-66	6 3/4 (172)	104 (47.2)	
P2070-67	6 7/8 (175)	106 (48.1)	
P2070-70	7 (178)	108 (49.0)	
P2070-71	7 1/8 (181)	110 (49.9)	
P2070-72	7 1/4 (184)	112 (50.8)	
P2070-73	7 3/8 (187)	114 (51.7)	
P2070-74	7 1/2 (191)	116 (52.6)	
P2070-75	7 5/8 (194)	117 (53.1)	
P2070-76	7 3/4 (197)	119 (54.0)	
P2070-77	7 7/8 (200)	121 (54.9)	
P2070-80	8 (203)	123 (55.8)	
P2070-81	8 1/8 (206)	125 (56.7)	
P2070-82	8 1/4 (210)	126 (57.2)	
P2070-83	8 3/8 (213)	128 (58.1)	
P2070-84	8 1/2 (216)	129 (58.5)	
P1126	8 5/8 (219)	130 (59.0)	

P2558-5 THRU P2558-60

SINGLE PIECE PIPE STRAP

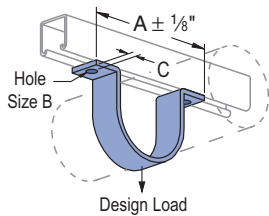

Hardware sold separately.

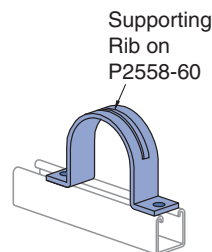


Part No.	Nom. Pipe Size In	A In (mm)	"B" In (mm)	C In (mm)	Thickness In (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kN)
P2558-05	1/2	2 1/8 73				23	
P2558-07	3/4	3 1/8 79				9/32	
P2558-10	1	3 3/8 86	7.1	11.1	3.2	31	500
P2558-12	1 1/4	3 3/4 95				14.1	2.22
P2558-15	1 1/2	3 7/8 98				35	
P2558-20	2	5 3/4 146				39	
P2558-25	2 1/2	6 1/4 159				15.9	
P2558-30	3	6 7/8 175				39	
P2558-35	3 1/2	7 3/8 187	7/16	11.1	1/4	17.7	
P2558-40	4	7 7/8 200				94	
P2558-50	5	9 229				42.6	
P2558-60	6	10 254				114	
						51.7	
						133	
						60.3	
						152	1,000
						68.9	4.45
						176	
						79.8	
						198	
						89.8	
						225	
						102.1	

1 1/2" Channel
 Telesruct System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P3409 THRU P3417

STAND-OFF PIPE CLAMPS

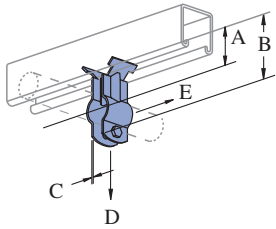


Hardware included.
 Finish: Electro-galvanized.
 Pipe Clamp 1¼" Wide
 Patent No. 3417951.

Part No.	Pipe Size In (mm)	O.D. Size In (mm)	Load "D" Lbs (kN)	Load "E" Lbs (kN)	A In (mm)	B In (mm)	C Gauge (mm)	Wt/100 pcs Lbs (kg)
P3409	¾	0.675	100	25	1⅞	2⅞	14	14
	10	17.1	0.44	0.11	29	54	1.9	6.4
P3411	½	0.840	150	35	1¼	2⅝	14	15
	13	21.3	0.67	0.16	32	59	1.9	6.8
P3412	¾	1.050	175	40	1⅝	2½	14	19
	19	26.7	0.78	0.18	33	64	1.9	8.6
P3413	1	1.315	200	50	1½	2¾	14	22
	25	33.4	0.89	0.22	38	70	1.9	10.0
P3414	1¼	1.660	300	70	1⅞	3¼	12	34
	32	42.2	1.33	0.31	43	83	2.7	15.4
P3415	1½	1.900	400	80	1¾	3½	11	49
	38	48.3	1.78	0.36	45	89	3.0	22.2
P3417	2	2.375	500	120	2	4	10	55
	51	60.3	2.22	0.53	51	102	3.4	24.9

Safety factor of 5

P2609 THRU P2617, P2426 THRU P2431

UNI-CLIP® SUPPORT

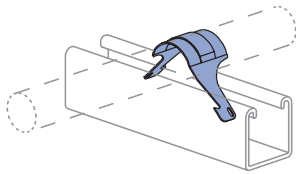

Material: Stainless steel type 301.

The Uni-Clip supports meet or exceed load requirements for American Standard Code for Pressure Piping (1967), and National Electric Code (1971).

Patent No. 2863625.

UNI-CLIP® SUPPORTS FOR THINWALL CONDUIT (E.M.T.)



Part Number	Conduit Size In (mm)	O.D. Size In (mm)	Wt/100 pcs Lbs (kg)
P2426	½	0.706	1.7
	13	17.9	0.8
P2427	¾	0.922	2.4
	19	23.4	1.1
P2428	1	1.163	3.6
	25	29.5	1.6
P2429	1¼	1.510	4.6
	32	38.4	2.1
P2430	1½	1.740	5.9
	38	44.2	2.7
P2431	2	2.197	8
	51	55.8	3.6

UNI-CLIP® SUPPORTS FOR RIGID STEEL CONDUIT

Part Number	Conduit Size In (mm)	O.D. Size In (mm)	Wt/100 pcs Lbs (kg)
P2609	¾	0.675	1.6
	10	17.1	0.7
P2611	½	0.840	2.3
	13	21.3	1.0
P2612	¾	1.050	3.2
	19	26.7	1.5
P2613	1	1.315	4.1
	25	33.4	1.9
P2614	1¼	1.660	5.1
	32	42.2	2.3
P2615	1½	1.900	6.3
	38	48.3	2.9
P2617	2	2.375	10
	51	60.3	4.5

MU025 THRU MU400

MUSTANG UNIVERSAL ONE-PIECE PIPE, CONDUIT (GRC, EMT & IMC) AND TUBING CLAMPS

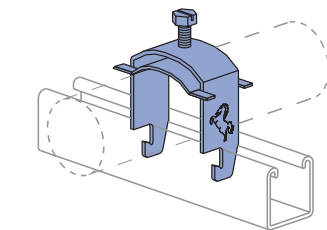

Finish: Electro-galvanized.
 Clamps are 14 ga.


Part No.	Nominal Trade Size In (mm)	OD		Height Above Channel "H"	
		Min In (mm)	Max In (mm)	Min In (mm)	Max In (mm)
MU025	¼	0.375	0.540	1¼	2
	6	10	14	44	51
MU037	¾	0.500	0.675	1⅞	2⅞
	10	13	17	48	54
MU050	½	0.625	0.840	2	2¼
	13	16	21	51	57
MU075	¾	0.875	1.050	2¼	2½
	19	22	27	57	64
MU100	1	1.125	1.315	2½	2¾
	25	29	33	64	70
MU125	1¼	1.375	1.660	2¾	3⅞
	32	35	42	70	79
MU150	1½	1.625	1.900	3	3⅝
	38	41	48	76	86
MU200	2	2.125	2.375	3½	3⅞
	51	54	60	89	98
MU250	2½	2.625	2.875	4¼	4⅞
	64	67	73	108	117
MU300	3	3.125	3.500	4⅞	5⅞
	76	79	89	124	137
MU350	3½	3.625	4.000	5⅝	5⅞
	89	92	102	137	149
MU400	4	4.125	4.500	5⅞	6⅞
	102	105	114	149	162



P2600

UNICUSHION®: ISOLATION MATERIAL

Wt/Carton: 2.5 Lbs (1.1 kg)

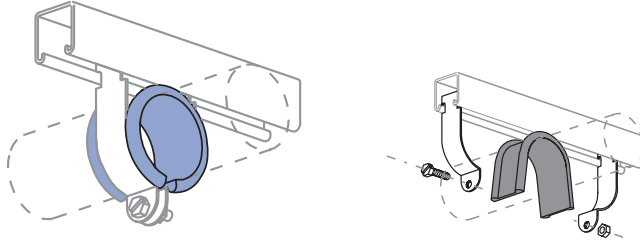

- 25 feet per carton.
- Cut to length as shown in chart below.

UNICUSHION FEATURES

- Shock absorption
- Protection from corrosion and abrasion
- Allowance for expansion and contraction in pipe diameter
- Sound and vibration isolation
- Stability in use from - 50° F (-47° C) to + 350°F (+177° C)
- Flexible elastomer material
- Will not support combustion

UNICUSHION® CLAMP SELECTION GUIDE

EMT CONDUIT

Nominal Size	Use with Clamp	UNICUSHION Length In (mm)
3/8"	P1426	1 3/4 (45)
1/2"	P1111	2 1/8 (54)
3/4"	P1112	2 3/4 (70)
1"	P2032	3 5/8 (92)
1 1/4"	P2035	4 3/4 (121)
1 1/2"	P2037	5 1/2 (140)
2"	P1117	6 3/4 (172)

STANDARD PIPE OR RIGID CONDUIT

Nominal Size	Use with Clamp	UNICUSHION Length In (mm)
3/8"	P1111	2 1/8 (54)
1/2"	P2030	3 (76)
3/4"	P2031	3 1/4 (83)
1"	P2034	4 1/4 (108)
1 1/4"	P2037	5 1/4 (133)
1 1/2"	P2038	6 (152)
2"	P2042	7 1/2 (191)
2 1/2"	P2046	9 (229)
3"	P2051	11 (279)
3 1/2"	P2055	12 1/4 (311)
4"	P2059	14 (356)
5"	P2067	17 1/2 (445)
6"	P2070-66	20 3/4 (527)

COPPER TUBING TYPE K OR L

Nominal Size	Use with Clamp	UNICUSHION Length In (mm)
1/4"	P2026	1 1/16 (27)
3/8"	P2027	1 1/2 (38)
1/2"	P2028	2 1/8 (54)
5/8"	P2029	2 1/4 (57)
3/4"	P2030	3 (76)
1"	P2032	3 5/8 (92)
1 1/4"	P2034	4 1/2 (114)
1 1/2"	P1430	5 1/4 (133)
2"	P2040	6 3/4 (172)
2 1/2"	P2044	8 1/4 (210)
3"	P2048	10 (254)
3 1/2"	P2052	11 1/4 (286)
4"	P2056	12 1/2 (318)
5"	P2064	16 (406)
6"	P2070-62	19 (483)
8"	P2070-82	25 (635)

UNICUSHION® CLAMP CUTTING GUIDE

O. D. Size In (mm)	Use With Clamp	UNICUSHION Length In (mm)
1/4 (6)	P2025	7/8 (22)
3/8 (9)	P2026	1 1/16 (27)
1/2 (13)	P2027	1 1/2 (38)
5/8 (16)	P2028	2 1/8 (54)
3/4 (19)	P2029	2 1/4 (57)
7/8 (22)	P2030	3 (76)
1 (25)	P2031	3 1/4 (83)
1 1/8 (29)	P2032	3 5/8 (92)
1 1/4 (32)	P2033	4 (102)
1 3/8 (35)	P2034	4 1/2 (114)
1 1/2 (38)	P2035	4 7/8 (124)
1 5/8 (41)	P1430	5 1/4 (133)
1 3/4 (45)	P2037	5 1/2 (140)
1 7/8 (48)	P2038	6 (152)
2 (51)	P2039	6 1/2 (165)
2 1/8 (54)	P2040	6 3/4 (172)
2 1/4 (57)	P1117	7 1/4 (184)
2 3/8 (60)	P2042	7 1/2 (191)
2 1/2 (64)	P2043	8 (203)
2 5/8 (67)	P2044	8 1/4 (210)
2 3/4 (70)	P1118	8 3/4 (222)
2 7/8 (73)	P2046	9 1/4 (235)
3 (76)	P2047	9 1/2 (241)


O. D. Size In (mm)	Use With Clamp	UNICUSHION Length In (mm)
3 1/8 (79)	P2048	10 (254)
3 1/4 (83)	P2049	10 1/2 (267)
3 5/8 (86)	P1119	10 3/4 (273)
3 1/2 (89)	P2051	11 (279)
3 5/8 (92)	P2052	11 1/4 (286)
3 3/4 (95)	P2053	11 1/2 (292)
3 7/8 (98)	P1120	11 3/4 (299)
4 (102)	P2055	12 (305)
4 1/8 (105)	P2056	12 1/2 (318)
4 1/4 (108)	P2057	13 (330)
4 3/8 (111)	P1121	13 1/2 (343)
4 1/2 (114)	P2059	14 (356)
4 5/8 (118)	P2060	14 1/4 (362)
4 3/4 (121)	P2061	14 3/4 (375)
4 7/8 (124)	P2062	15 (381)
5 (127)	P2063	15 1/2 (394)
5 1/8 (130)	P2064	16 (406)
5 1/4 (133)	P2065	16 1/4 (413)
5 3/8 (137)	P2066	16 1/2 (419)
5 1/2 (140)	P2067	17 (432)
5 5/8 (143)	P2068	17 1/2 (445)
5 3/4 (146)	P2069	17 3/4 (451)
5 7/8 (149)	P2070	18 1/4 (464)

O. D. Size In (mm)	Use With Clamp	UNICUSHION Length In (mm)
6 (152)	P2070-61	18 1/2 (469)
6 1/8 (156)	P2070-62	19 (482)
6 1/4 (159)	P2070-63	19 1/4 (489)
6 3/8 (162)	P2070-64	19 3/4 (502)
6 1/2 (165)	P1124	20 (508)
6 5/8 (168)	P2070-66	20 1/2 (521)
6 3/4 (172)	P2070-67	21 (533)
6 7/8 (175)	P2070-70	21 1/4 (540)
7 (178)	P2070-71	21 3/4 (553)
7 1/8 (181)	P2070-72	22 (559)
7 1/4 (184)	P2070-73	22 1/2 (572)
7 3/8 (187)	P2070-74	22 3/4 (578)
7 1/2 (191)	P2070-75	23 1/4 (591)
7 5/8 (194)	P2070-76	23 1/2 (597)
7 3/4 (197)	P2070-77	24 (610)
7 7/8 (200)	P2070-80	24 1/2 (622)
8 (203)	P2070-81	24 3/4 (629)
8 1/8 (206)	P2070-82	25 (635)
8 1/4 (210)	P2070-83	25 1/2 (648)
8 3/8 (213)	P2070-84	26 (660)
8 1/2 (216)	P1126	26 1/4 (667)

1 5/8" Channel
 Telesruct System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

004T008 THRU 098N106, 009N012 THRU 106N114

CUSH-A-CLAMP® ASSEMBLY

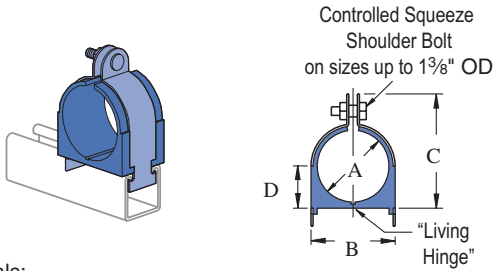

Materials:

- Clamp: Electro-galvanized or stainless steel.
- Cushion: Thermoplastic elastomer. (UV Resistant)

Includes cushion, clamp and hardware.

Temperature Rating:
-50°F to +275°F (-45°C to +135°C)

Insert Width: 1.56" (39.6)

Patent Numbers: 4,516,296; 4,934,635

Part Numbers are "coded" to designate cushion size and clamp size. Examples:

- 004T008** 004 - Cushion Size 1/16" (6.4)
T - With Controlled Squeeze Shoulder Bolt
Available on sizes up to 1 3/8"
- 008 - Clamp Size 3/16" (12.7)
- 009N012** 009 - Cushion Size 3/16" (14.3)
N - With Standard Bolt
- 012 - Clamp Size 1/2" (19.1)

Pipe Series Assembly

Part No.	Nominal Pipe Size	"A" In(mm)	"B" In(mm)	"C" In(mm)	"D" In(mm)	Wt/100 pcs Lbs/(kg)
009N012	1/4	0.54 14	0.98 25	1.34 34	0.43 11	13 5.9
011N014	3/8	0.67 17	1.13 29	1.54 39	0.49 12	14 6.4
014N018	1/2	0.84 21	1.29 33	1.82 46	0.58 15	15 6.8
017N022	3/4	1.05 27	1.50 38	1.95 50	0.70 18	17 7.7
021N026	1	1.31 33	1.76 45	2.34 59	0.81 21	19 8.6
027N032	1 1/4	1.66 42	2.17 55	2.73 69	0.99 25	35 15.9
030N034	1 1/2	1.90 48	2.35 60	2.86 73	1.09 28	39 17.7
038N044	2	2.37 60	2.82 72	3.67 93	1.41 36	49 22.2
046N052	2 1/2	2.87 73	3.32 84	4.17 106	1.66 42	57 25.9
056N062	3	3.50 89	3.95 100	4.79 122	1.97 50	55 24.9
064N072	3 1/2	4.00 102	4.45 113	5.42 138	2.28 58	88 39.9
072N080	4	4.50 114	4.95 126	5.92 150	2.53 64	110 49.9
089N096	5	5.56 141	6.01 153	6.92 176	3.06 78	130 59.0
106N114	6	6.62 168	7.07 180	8.23 209	3.59 91	140 63.5



Tube Series Assembly

Part Number	Copper & Steel Tube O. D. Size	Copper Water Pipe (Nominal)	Dimensions				Wt/100 pcs Lbs/(kg)
			"A" In(mm)	"B" In(mm)	"C" In(mm)	"D" In(mm)	
004T008	1/4		0.25 6	0.62 16	0.98 29	0.27 7	10 4.5
006T010	3/8	1/4	0.37 9	0.82 21	1.13 29	0.33 8	11 5.0
008T012	1/2	3/8	0.50 13	0.94 24	1.34 34	0.40 10	13 5.9
010T014	5/8	1/2	0.62 16	1.06 27	1.54 39	0.46 12	14 6.4
012T016	3/4	5/8	0.75 19	1.20 31	1.68 43	0.52 13	14 6.4
014T018	7/8	3/4	0.87 22	1.31 33	1.82 46	0.58 15	15 6.8
016T020	1		1.00 25	1.44 37	1.95 50	0.65 17	17 7.7
018T022	1 1/8	1	1.12 28	1.57 40	2.08 53	0.70 18	18 8.2
020T024	1 1/4		1.25 32	1.70 43	2.21 56	0.77 20	18 8.2
022T026	1 3/8	1 1/4	1.37 35	1.82 46	2.34 59	0.83 21	20 9.1
024N028	1 1/2		1.50 38	1.95 50	2.47 63	0.90 23	33 15.0
026N030	1 5/8	1 1/2	1.62 41	2.07 53	2.60 66	0.96 24	35 15.9
028N032	1 3/4		1.75 45	2.20 56	2.73 69	1.02 26	37 16.8
030N034	1 7/8		1.90 48	2.35 60	2.86 73	1.09 28	39 17.7
032N036	2		2.00 51	2.45 62	3.04 77	1.15 29	46 20.9
034N040	2 1/8	2	2.12 54	2.57 65	3.23 82	1.27 32	47 21.3
038N044	2 3/8		2.37 60	2.82 72	3.67 93	1.41 36	49 22.2
040N046	2 1/2		2.50 64	2.94 75	3.79 96	1.46 37	51 23.1
042N048	2 5/8		2.62 67	3.07 78	3.92 100	1.53 39	55 24.9
046N052	2 7/8		2.87 73	3.32 84	4.17 106	1.66 42	57 25.9
050N054	3		3.00 76	3.57 91	4.42 112	1.78 45	60 27.2
050N056	3 1/8		3.12 79	3.57 91	4.42 112	1.78 45	60 27.2
053N060	3 5/16		3.31 84	3.96 101	4.75 121	1.90 48	62 28.1
056N062	3 1/2		3.50 89	3.95 100	4.79 122	1.97 50	55 24.9
058N064	3 3/8		3.62 92	4.20 107	4.99 127	2.03 52	70 31.8
064N072	4		4.00 102	4.45 113	5.42 138	2.28 58	88 39.9
066N074	4 1/8		4.12 105	4.57 116	5.54 141	2.34 59	94 42.6
069N076	4 5/16		4.34 110	4.96 126	5.84 148	2.40 61	100 45.4
072N080	4 1/2		4.50 114	4.95 126	5.92 150	2.53 64	110 49.9
082N090	5 1/8		5.12 130	5.57 142	6.54 166	2.84 72	125 56.7
098N106	6 1/8		6.12 155	6.57 167	7.54 192	3.34 85	130 59.0



004M007 THRU 034M040

CUSH-A-CLAMP® ASSEMBLY OMEGA SERIES™

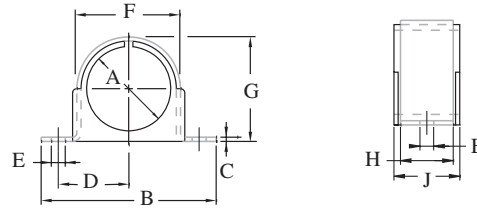



Includes clamp and cushion.
 Materials: Clamp: ZD or stainless steel.
 Cushion: Thermoplastic elastomer.

Note: Cannot be mounted on the slotted side of metal framing channel.
 Can be mounted to any flat surface.

Part Number	Copper & Steel Tubing O. D. In	Copper Water Pipe (Nominal) In	Pipe Size (Nominal) In	Dimensions									Wt/100 pcs Lbs (kg)
				"A" In (mm)	"B" In (mm)	"C" In (mm)	"D" In (mm)	"E" In (mm)	"F" In (mm)	"G" In (mm)	"H" In (mm)	"J" In (mm)	
004M007	¼			0.25	1.81	0.06	0.60	0.20	0.53	0.48	0.62	0.78	3.4
				6	46	2	15	5	14	12	16	20	1.5
006M008	¾	¼		0.37	1.90	0.06	0.65	0.20	0.62	0.62	0.62	0.81	4.0
				9	48	2	17	5	16	16	16	20	1.8
008M011	½	¾	¼	0.50	2.20	0.06	0.80	0.26	0.82	0.75	0.75	0.98	5.5
				12	56	2	20	7	21	19	19	25	2.5
010M013	⅝	½	¾	0.62	2.32	0.06	0.86	0.26	0.94	0.87	0.75	0.98	6.0
				16	59	2	22	7	24	22	19	25	2.7
012M015	¾	⅝		0.75	2.41	0.06	0.90	0.26	1.03	1.01	0.75	0.98	6.5
				19	61	2	23	7	26	26	19	25	2.9
014M017	⅞	¾	½	0.87	2.56	0.06	0.98	0.26	1.18	1.03	0.75	0.98	7.1
				22	65	2	25	7	30	26	19	25	3.2
016M019	1			1.00	2.68	0.06	1.04	0.26	1.31	1.25	0.75	0.98	7.8
				25	68	2	26	7	33	32	19	25	3.5
018M020			¾	1.05	2.68	0.06	1.04	0.26	1.31	1.25	0.75	0.98	8.1
				27	68	2	26	7	33	32	19	25	3.7
018M021	1⅛	1		1.12	2.82	0.06	1.11	0.26	1.44	1.33	0.75	0.98	8.4
				28	72	2	28	7	37	34	19	25	3.8
020M024	1¼			1.25	3.00	0.08	1.20	0.26	1.65	1.47	1.25	1.56	17
				32	76	2	31	7	42	37	32	40	7.7
021M026			1	1.31	3.12	0.08	1.26	0.26	1.76	1.71	1.25	1.56	20
				33	79	2	32	7	45	43	32	40	9.1
022M026	1⅜	1¼		1.37	3.12	0.08	1.26	0.26	1.76	1.71	1.25	1.56	19
				35	79	2	32	7	45	43	32	40	8.6
024M028	1½			1.50	3.65	0.08	1.42	0.26	1.93	1.88	1.25	1.56	20
				38	93	2	36	7	49	48	32	40	9.1
026M030	1⅝	1½		1.62	3.77	0.08	1.48	0.26	2.07	2.00	1.25	1.56	23
				41	96	2	38	7	53	51	32	40	10.4
027M032			1¼	1.66	3.90	0.10	1.55	0.33	2.21	2.12	1.25	1.56	32
				42	99	3	39	8	56	54	32	40	14.5
028M032	1¾			1.75	3.90	0.10	1.55	0.33	2.21	2.12	1.25	1.56	32
				45	99	3	39	8	56	54	32	40	14.5
030M034	1⅞		1½	1.87	4.02	0.10	1.61	0.33	2.33	2.25	1.25	1.56	34
				48	102	3	41	8	59	57	32	40	15.4
032M036	2			2.00	4.15	0.10	1.67	0.33	2.46	2.38	1.25	1.56	36
				51	105	3	42	8	63	61	32	40	16.3
034M040	2½			2.12	4.40	0.10	1.80	0.33	2.71	2.62	1.25	1.56	41
				54	112	3	46	8	69	67	32	40	18.6
038M044			2	2.37	4.71	0.10	1.94	0.33	2.96	2.88	1.25	1.56	44
				60	120	3	49	8	75	73	32	40	20.0
082M090	5⅝			5.12	7.64	0.10	3.41	0.40	5.83	6.75	1.25	1.56	120
				130	194	3	87	10	148	172	32	40	54.4

1½" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1¼" Framing System
 1⅜" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

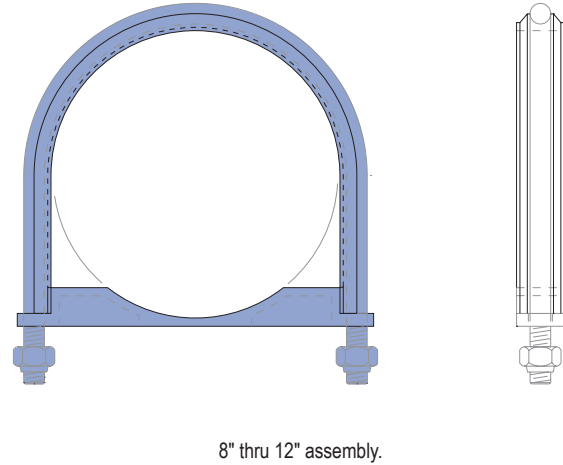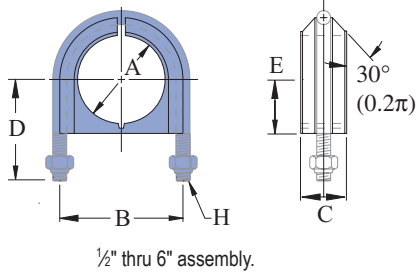

Includes U bolt, cushion, and hardware.

Materials:

U Bolt: Electro-galvanized finish or Type 316SS

Cushion: Thermoplastic elastomer.


Note: Not intended for use with metal framing components due to the length of the thread.

Part Number	Pipe Size (Nominal) In (mm)	Dimensions							H	Wt/100 pcs Lbs (kg)
		"A" In (mm)	"B" In (mm)	"C" In (mm)	"D" In (mm)	"E" In (mm)	"F" In (mm)			
UB ¹ / ₂ PA	1/2	0.84	1.60	0.68	1.5	0.67	1/4	1/4-20 UNC-2B	9	
	13	21	41	17	38	17	6.4		4.1	
UB ³ / ₄ PA	3/4	1.05	1.80	0.68	1.6	0.78	1/4	1/4-20 UNC-2B	10	
	19	27	46	17	41	20	6.4		4.5	
UB1PA	1	1.31	2.05	0.68	1.7	0.91	1/4	1/4-20 UNC-2B	12	
	25	33	52	17	43	23	6.4		5.4	
UB1 ¹ / ₄ PA	1 1/4	1.66	2.54	1.24	2.1	1.08	3/8	3/8-16 UNC-2B	36	
	32	42	65	32	53	27	9.5		16.3	
UB1 ¹ / ₂ PA	1 1/2	1.90	2.78	1.24	2.2	1.19	3/8	3/8-16 UNC-2B	32	
	38	48	71	32	56	30	9.5		14.5	
UB2PA	2	2.37	3.32	1.24	2.5	1.45	3/8	3/8-16 UNC-2B	42	
	51	60	84	32	64	37	9.5		19.1	
UB2 ¹ / ₂ PA	2 1/2	2.87	3.88	1.24	3.0	1.69	1/2	1/2-13 UNC-2B	72	
	64	73	99	32	76	43	12.7		32.7	
UB3PA	3	3.50	4.50	1.24	3.3	2.00	1/2	1/2-13 UNC-2B	84	
	76	89	114	32	84	51	12.7		38.1	
UB3 ¹ / ₂ PA	3 1/2	4.00	5.00	1.24	3.7	2.25	1/2	1/2-13 UNC-2B	93	
	89	102	127	32	94	57	12.7		42.2	
UB4PA	4	4.50	5.50	1.24	3.9	2.5	1/2	1/2-13 UNC-2B	102	
	102	114	140	32	99	64	12.7		46.3	
UB5PA	5	5.56	6.59	1.24	4.5	3.03	1/2	1/2-13 UNC-2B	123	
	127	141	167	32	114	77	12.7		55.8	
UB6PA	6	6.62	7.81	1.44	5.4	3.56	5/8	5/8-11 UNC-2B	123	
	152	168	198	37	137	90	15.9		55.8	
UB8PA	8	8.62	9.84	1.44	6.4	4.56	5/8	5/8-11 UNC-2B	243	
	203	219	250	37	163	116	15.9		110.2	
UB10PA	10	10.75	12.25	1.65	7.7	5.68	3/4	3/4-10 UNC-2B	492	
	254	273	311	42	196	144	19.1		223.2	
UB12PA	12	12.75	14.25	1.65	8.7	6.68	3/4	3/4-10 UNC-2B	563	
	305	324	362	42	221	170	19.1		255.4	



CG-10 THRU CG-40

CUSH-A-GRIP®

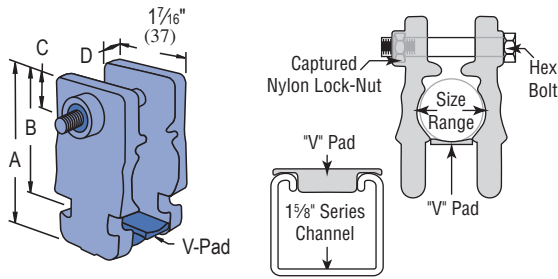

Part Number	O.D. Tube Sizes In(mm)			Nominal Pipe Sizes In(mm)		Diameters In(mm)	PullOut Load Lbs(kN)	Slip Load Lbs(kN)
CG-10	1/4	3/8	1/2	1/4		0.25 - 0.54	500	40
	6	10	13	6		6 - 14	2.22	0.18
CG-20	5/8	3/4	7/8	3/8	1/2	0.62 - 0.87	500	40
	16	19	22	10	13	16 - 22	2.22	0.18
CG-30	7/8	1	1 1/8	3/4		0.87 - 1.12	500	40
	22	25	29	19		22 - 29	2.22	0.18
CG-40	1	1 1/8	1 1/4	3/4	1	1.00 - 1.31	500	40
	25	29	32	19	25	25 - 33	2.22	0.18

Includes Cushion, V-pad, and Hardware.

Materials: Cushion: Thermoplastic elastomer.

Hardware: Stainless Steel with Captured Nylon Locknut

Temperature Rating:

-40°F to +275°F (-40°C to 135°C)



Part Number	Nominal Pipe Size	"A" In(mm)	"B" In(mm)	"C" In(mm)	"D" In(mm)	Hex Head Cap Screw & Lock Nut	Wt/100 pcs Lbs(kg)
CG-10	1/4	1 15/16	1 3/8	3/8	3/16	1/4-20 x 1 1/2"	4
		49	35	10	5		1.8
CG-20	3/8	2 3/8	1 5/8	7/16	5	1/4-20 x 2"	6
		60	42	11	6		2.7
CG-30	1/2	2 9/16	1 13/16	7/16	5 1/16	1/4-20 x 2"	8
		65	46	11	8		3.6
CG-40	3/4	2 11/16	1 15/16	7/16	5 1/16	1/4-20 x 2"	8
		68	49	11	8		3.6

PUX3834 THRU PUX41810

CUSH-A-THERM™

The only airtight, crush-resistant insulation clamp on the market.

- Maintains thermal barrier protection
- Prevents condensation
- Properly supports pipe and tube
- Absorbs vibration

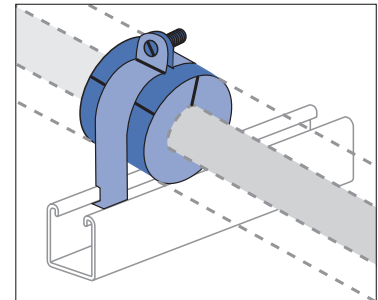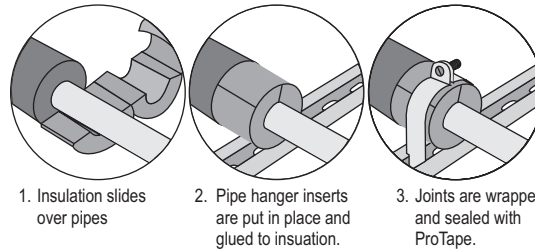

Nominal 3/4" Wall

Part Number	Hole Size In(mm)	Copper Nom. I.D. In(mm)	O.D. In(mm)	IPS In(mm)	O.D. In(mm)	Length In(mm)
PUX3834	3/8 ID	1/4	3/8	-	1.81	2.17
	10	6	10	-	46	55
PUX1234	1/2 ID	3/8	1/2	1/4	1.89	2.17
	13	10	13	6	48	55
PUX5834	5/8 ID	1/2	5/8	3/8	2.05	2.17
	16	13	16	10	52	55
PUX3434	3/4 ID	5/8	3/4	-	2.22	2.17
	19	16	19	-	56	55
PUX7834	7/8 ID	3/4	7/8	1/2	2.44	2.17
	22	19	22	13	62	55
PUX11834	1 1/8 ID	1	1 1/8	3/4	2.76	2.17
	29	25	29	29	70	55
PUX13834	1 3/8 ID	1 1/4	1 3/8	1	3.19	2.56
	35	32	35	25	81	65
PUX15834	1 5/8 ID	1 1/2	1 5/8	1 1/4	3.35	2.58
	41	38	41	32	85	66
PUX21834	2 1/8 ID	2	2 1/8	-	3.86	2.56
	54	51	54	-	98	65
PUX23834	2 3/8 ID	2 1/4	2 3/8	2	4.29	2.96
	60	57	60	51	109	75
PUX25834	2 5/8 ID	2 1/2	2 5/8	-	4.87	2.96
	67	64	67	-	124	75
PUX31834	3 1/8 ID	3	3 1/8	-	5.00	3.35
	79	76	79	-	127	85
PUX35834	3 3/8 ID	3 1/2	3 3/8	-	5.94	3.94
	92	89	92	-	151	100
PUX41834	4 1/8 ID	4	4 1/8	3 1/2	6.14	3.94
	105	102	105	89	156	100


Nominal 1" Wall

Part Number	Hole Size In(mm)	Copper Nom. I.D. In(mm)	O.D. In(mm)	IPS In(mm)	O.D. In(mm)	Length In(mm)
PUX5810	1/2 ID	1/4	5/8	3/8	2.54	2.17
	16	13	16	10	65	55
PUX3410	3/4 ID	5/8	3/4	-	2.82	2.17
	19	16	19	-	72	55
PUX7810	7/8 ID	3/4	7/8	1/2	2.82	2.17
	22	19	22	13	72	55
PUX11810	1 1/8 ID	1	1 1/8	3/4	3.06	2.17
	29	25	29	19	78	55
PUX13810	1 3/8 ID	1 1/4	1 3/8	1	3.33	2.56
	35	32	35	25	85	65
PUX15810	1 5/8 ID	1 1/2	1 5/8	1 1/4	3.65	2.56
	41	38	41	32	93	65
PUX21810	2 1/8 ID	2	2 1/8	-	4.16	2.56
	54	51	54	-	106	65
PUX23810	2 3/8 ID	2 1/4	2 3/8	2	3.92	2.56
	60	57	60	51	100	65
PUX25810	2 5/8 ID	2 1/2	2 5/8	-	4.87	2.96
	67	64	67	-	124	75
PUX31810	3 1/8 ID	3	3 1/8	-	5.14	3.35
	79	76	79	-	131	85
PUX35810	3 3/8 ID	3 1/2	3 3/8	-	6.48	3.94
	92	89	92	-	165	100
PUX41810	4 1/8 ID	4	4 1/8	3 1/2	6.48	3.94
	105	102	105	89	165	100

J1205 THRU J1280, J1205 N THRU J 1280 N (PLASTIC COATED)

"J" CONDUIT & PIPE HANGER


NOTE: Maximum operating temperature is 300°F (148.8°C)

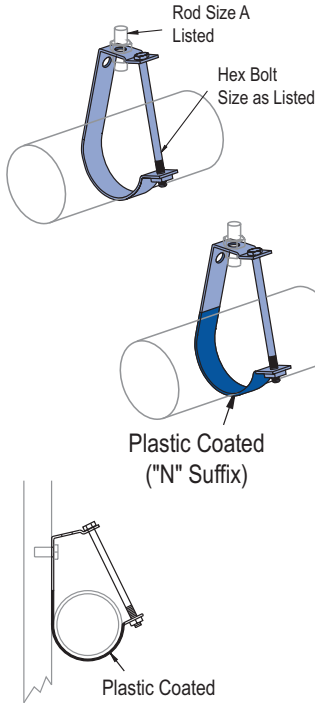

Part No.	Wt/100 pcs Lbs (kg)	Part No.	Wt/100 pcs Lbs (kg)	Pipe Size In	"A" In (mm)	"B" In (mm)	"C" In (mm)	"D" In (mm)	"E" In (mm)	"F" In (mm)	Load Lbs (kN)
J1205	20 9.1	J1205N	21 9.5	1/2	3/8 10	2 5/8 67	1 25	2 51	1 3/32 10.3	1/4 x 2 1/4 6 x 57	400 1.78
J1207	21 9.5	J1207N	22 10.0	3/4	3/8 10	2 7/8 73	1 25	2 1/4 57	1 3/32 10.3	1/4 x 2 1/4 6 x 57	400 1.78
J1210	24 10.9	J1210N*	25 11.3	1	3/8 10	3 76	1 25	2 3/8 60	1 3/32 10.3	1/4 x 2 1/2 6 x 64	400 1.78
J1212	27 12.2	J1212N	29 13.2	1 1/4	3/8 10	3 1/4 83	1 25	2 1/2 64	1 3/32 10.3	1/4 x 2 3/4 6 x 70	400 1.78
J1215	29 13.2	J1215N*	31 14.1	1 1/2	3/8 10	3 1/2 89	1 25	2 5/8 67	1 3/32 10.3	1/4 x 3 6 x 76	400 1.78
J1220	33 15.0	J1220N*	35 15.9	2	3/8 10	3 3/4 95	1 1/8 29	2 5/8 67	1 3/32 10.3	1/4 x 3 1/2 6 x 89	400 1.78
J1225	71 32.2	J1225N	74 33.6	2 1/2	1/2 13	4 3/8 111	1 1/8 29	3 5/8 92	9/16 14.3	3/8 x 4 1/2 10 x 114	800 3.56
J1230	78 35.4	J1230N*	81 36.7	3	1/2 13	4 7/8 124	1 1/8 29	4 102	9/16 14.3	3/8 x 5 10 x 127	800 3.56
J1235	85 38.6	J1235N	88 39.9	3 1/2	1/2 13	5 1/8 127	1 1/8 29	4 1/4 108	9/16 14.3	3/8 x 6 10 x 152	800 3.56
J1240	178 80.7	J1240N*	182 82.6	4	5/8 16	6 1/8 156	1 1/8 29	5 1/8 130	9/16 14.3	3/8 x 6 10 x 152	800 3.56
J1250	199 90.3	J1250N	203 92.1	5	5/8 16	6 3/4 172	1 1/8 29	5 3/4 146	9/16 14.3	3/8 x 7 1/2 10 x 191	800 3.56
J1260	231 104.8	J1260N*	236 107.0	6	3/4 19	7 3/4 197	1 1/4 32	6 1/2 165	9/16 14.3	3/8 x 8 1/2 10 x 216	1,000 4.45
J1280	449 203.7	J1280N	458 207.7	8	7/8 22	9 1/4 235	1 1/4 32	8 203	9/16 14.3	3/8 x 10 10 x 254	1,200 5.34

*Standard glass drainline and glass process pipe sizes. Minimum safety factor of five (5) on ultimate load.


"T" Bolt and Nut Included



Hanger Rod Suspended


P2474

PIPE ROLLER FOR 1/2" - 4" PIPE

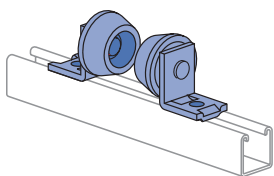

Sold in pairs.

Requires 2 each 1/2" x 1 9/16" bolts and 1/2" channel nuts per assembly. Sold separately.

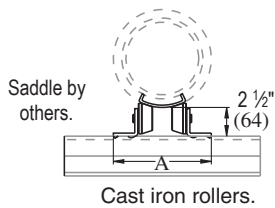

Design Load
500 Lbs (2.22kN)

Wt/100 pcs: 268 Lbs (121.6 kg)

Chart for Dimension A

Pipe Size In	No Insulation In (mm)	Insulation Thickness					
		1" In (mm)	1 1/2" In (mm)	2" In (mm)	2 1/2" In (mm)	3" In (mm)	4" In (mm)
1/2	6 1/2	6 1/2	-	-	-	-	-
	165	165	-	-	-	-	-
3/4	6 1/2	6 1/2	6 5/8	6 7/8	-	-	-
	165	165	168	175	-	-	-
1	6 1/2	6 1/2	6 5/8	6 7/8	-	-	-
	165	165	168	175	-	-	-
1 1/4	6 1/2	6 1/2	6 5/8	7 1/8	7 3/8	-	-
	165	165	175	181	187	-	-
1 1/2	6 1/2	6 1/2	6 5/8	7 1/8	7 3/8	-	-
	165	165	175	181	187	-	-
2	6 1/2	6 5/8	7 1/8	7 3/8	7 1/2	8	-
	165	168	181	187	191	203	-
2 1/2	6 1/2	6 5/8	7 1/8	7 3/8	7 1/2	8	-
	165	168	181	187	191	203	-
3	6 1/2	7	7 1/2	7 3/4	7 7/8	8 1/8	-
	165	178	191	197	200	206	-
3 1/2	6 1/2	7	7 1/2	7 3/4	7 7/8	8 1/8	-
	165	178	191	197	200	206	-
4	6 5/8	7 1/4	7 5/8	7 7/8	8	8 3/8	9
	168	184	194	200	203	213	229



1 5/8" Channel

Telestrut System

Nuts & Hardware

General Fittings

Pipe/Conduit Supports

Electrical Fittings

Concrete Inserts

1 1/4" Framing System

1 3/16" Framing System

1 3/16" Framing System


Fiberglass System

Special Metals

PrimeAngle System



Product Index

P2474-1 THRU P2474-4

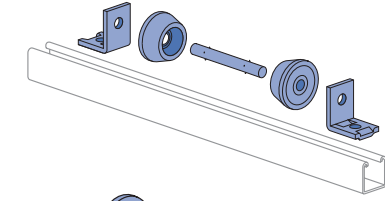

Parts are shipped loose and are easily assembled during installation.

Design Load
750 Lbs (3.34 kN)

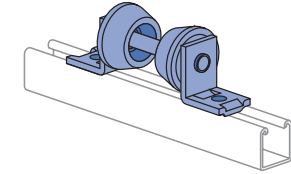

Saddle by others.

- Pipe roller will fit standard saddles.
- Select proper roller from chart.
- Requires 2 each 1/2" x 15/16" bolts and 1/2" channel nuts per assembly. Sold separately.


Chart for Roller Part Number Selection

Pipe Size In	No Insulation	Insulation Thickness					
		1" (25.4)	1 1/2" (38.1)	2" (50.8)	2 1/2" (63.5)	3" (76.2)	4" (101.6)
1/2	P2474-1	P2474-1	P2474-1	P2474-2	-	-	-
3/4	P2474-1	P2474-1	P2474-1	P2474-2	-	-	-
1	P2474-1	P2474-1	P2474-1	P2474-2	-	-	-
1 1/4	P2474-1	P2474-1	P2474-1	P2474-2	-	-	-
1 1/2	P2474-1	P2474-1	P2474-2	P2474-2	P2474-2	-	-
2	P2474-1	P2474-1	P2474-2	P2474-2	P2474-2	-	-
2 1/2	P2474-1	P2474-1	P2474-2	P2474-2	P2474-2	-	-
3	P2474-1	P2474-2	P2474-2	P2474-3	P2474-3	P2474-3	-
3 1/2	P2474-1	P2474-2	P2474-2	P2474-3	P2474-3	P2474-3	-
4	P2474-1	P2474-2	P2474-2	P2474-3	P2474-3	P2474-3	-
5	P2474-2	P2474-3	P2474-3	P2474-3	P2474-3	P2474-4	P2474-4
6	P2474-2	P2474-3	P2474-3	P2474-3	P2474-3	P2474-4	P2474-4
8	P2474-2	P2474-3	P2474-4	P2474-4	P2474-4	P2474-4	P2474-4

PIPE ROLLER FOR 1" - 8" PIPE

Part Number	A In (mm)	Wt/100 pcs Lbs (kg)
P2474-1	6 3/4	299
	172	135.6
P2474-2	7 1/2	304
	191	137.9
P2474-3	8 1/2	311
	216	141.1
P2474-4	9 9/16	319
	243	144.7

P2475

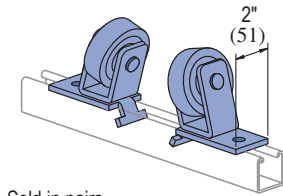

Material: Cast iron rollers.


- Requires 2 each 1/2" x 15/16" bolts and 1/2" channel nuts per assembly. Sold separately.

Chart for Dimension A

Pipe Size In	No Insulation In (mm)	Insulation Thickness					
		1" In (mm)	1 1/2" In (mm)	2" In (mm)	2 1/2" In (mm)	3" In (mm)	4" In (mm)
6	9 1/2	10 1/4	10 1/2	10 3/4	11	11 3/8	11 7/8
	241	260.4	273	279	289	289	302
8	10 3/8	*	11	11 3/8	11 3/4	12	12 1/2
	257		279	289	299	305	318
10	10 3/4	*	11 5/8	12	12 1/4	12 1/2	13
	273		295	305	311	316	330
12	11 1/4	*	12 1/8	12 1/2	12 3/4	13	13 1/2
	286		308	318	324	330	343
14	11 5/8	*	12 1/2	12 5/8	13	13 3/8	14
	295		318	327	330	340	356
16	12 1/8	*	13	13 3/8	13 5/8	14	14 1/2
	308		330	340	352	356	368

(*Not used for this size)

Sold in pairs.

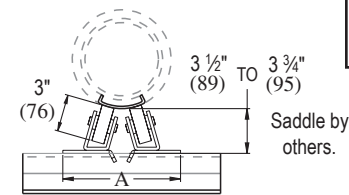


Saddle by others.

Design Load
1500 Lbs (6.67 kN)

Wt/100 pcs: 680 Lbs (308.4 kg)

P2476

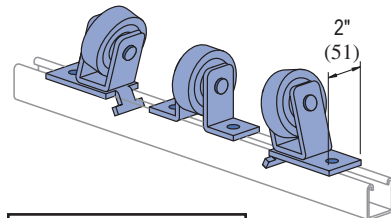


- Requires 4 each 1/2" x 15/16" bolts and 1/2" channel nuts per assembly. Sold separately.

Chart for Dimension A

Pipe Size In	Insulation Thickness				
	1 1/2" In (mm)	2" In (mm)	2 1/2" In (mm)	3" In (mm)	4" In (mm)
16	-	-	13 3/8	14	14 1/2
	-	-	352	356	368
18	13 3/8	14	14 1/8	14 1/2	15
	346	356	359	368	381
20	14 1/8	14 1/2	14 3/4	15	15 1/2
	359	368	375	381	394
24	15 1/4	15 1/2	15 5/8	16 1/8	16 3/4
	387	394	403	410	422

Design Load
2000 Lbs (8.90 kN)

Material: Cast iron rollers.




Saddle by others.

Wt/100 pcs: 1046 Lbs (474.5 kg)

Standard Dimensions for 1 5/8" (41 mm) width series channel fittings (Unless Otherwise Shown on Drawing)


Hole Diameter: 9/16" (14mm); Hole Spacing - From End: 1 3/16" (21 mm); Hole Spacing - On Center: 1 7/8" (48 mm); Width: 1 5/8" (41mm); Thickness: 1/4" (6mm)

P2481 PIPE SUPPORT BRACKET




For 1/2" pipe to 1 1/2" pipe.

P2482 PIPE SUPPORT BRACKET

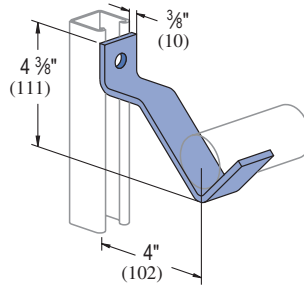

For 2" pipe to 3" pipe.

P2243 PIPE BLOCK

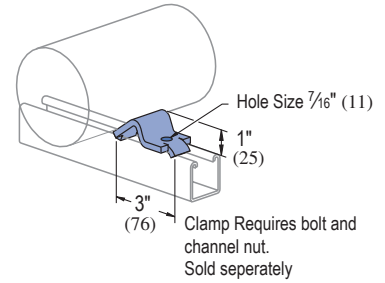

For 2" (51) to 8" (203) Pipes


Wt/100 pcs Lbs (kg)	Design Load (Upright Channel)		
	P1000 Lbs (kN)	P1100 Lbs (kN)	P2000 Lbs (kN)
90 40.8	85 0.38	85 0.38	85 0.38

Wt/100 pcs Lbs (kg)	Design Load (Upright Channel)		
	P1000 Lbs (kN)	P1100 Lbs (kN)	P2000 Lbs (kN)
139 63.0	185 0.82	120 0.53	95 0.42

Wt/100 pcs: 40 Lbs (18.1 kg)


UP-BK THRU **UP-MPDS**

UNIPIER™

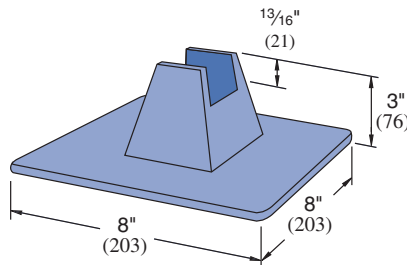

Part Number	UniPier Bases Qty.	Description
UP-BK	4	UniPier Base Only (4 Bases & Hardware)
UP-SPSS-6 HG	4	UP-BK + 4 Pcs P4100T HG @ 6" (152mm) Long for up to 3 1/2" (89mm) Pipe
UP-SPSS-10HG	4	UP-BK + 4 Pcs P4100T HG @ 10" (254mm) Long for 4" to 8" (101.6 to 203mm) Pipe
UP-MPDS-26HG	4	UP-BK + 2 Pcs P1000T HG @ 26" (66.0cm) Long for Trapeze
UP-MPDS-38HG	4	UP-BK + 2 Pcs P1000T HG @ 38" (96.5cm) Long for Trapeze
UP-MPDS-50HG	4	UP-BK + 2 Pcs P1000T HG @ 50" (127.0cm) Long for Trapeze
UP-MPDS-62HG	4	UP-BK + 2 Pcs P1000T HG @ 62" (157.5cm) Long for Trapeze

The UniPier Rooftop support system provides a simple and versatile way to support and manage pipe, tubing, conduit, HVAC systems, and the like. The UniPier system supports without roof surface penetration and allows the parts to remain off the surface

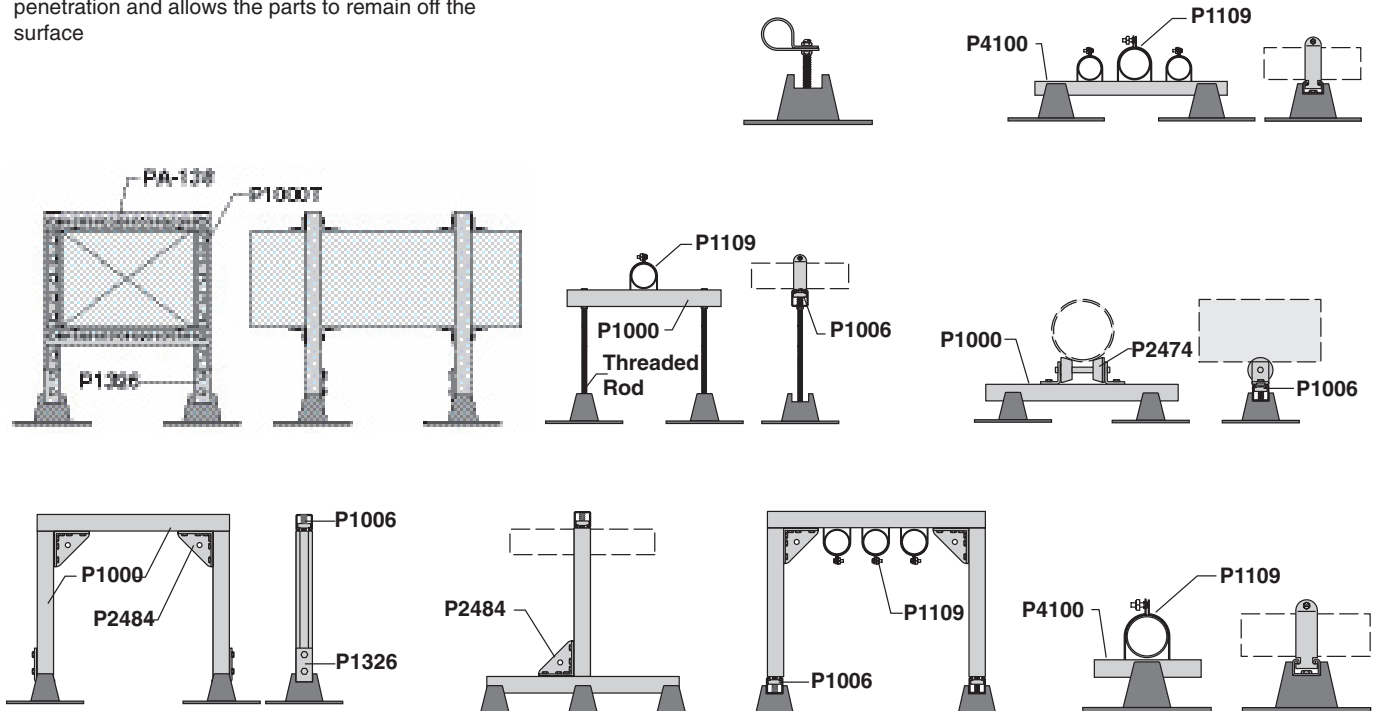



Nominal Pipe Dia.	Centerline to Centerline (In/mm)																	
	¾" (19mm)		1" (25mm)			1¼" (32mm)			1½" (38mm)			2" (51mm)			2½" (64mm)			
	T	S	T	F	S	T	F	S	T	F	S	T	F	S	T	F	S	
¾" 19mm	T	4¾ 121	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	S	4½ 114	4¾ 108	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
1" 25mm	T	5 127	4¾ 121	5¼ 133	-	-	-	-	-	-	-	-	-	-	-	-	-	
	F	6 152	5¾ 146	6¼ 159	7¼ 184	-	-	-	-	-	-	-	-	-	-	-	-	
	S	4¾ 121	4½ 114	5 127	6 152	4½ 114	-	-	-	-	-	-	-	-	-	-	-	
1¼" 32mm	T	5¼ 133	5 127	5½ 140	6½ 165	5 127	5½ 140	-	-	-	-	-	-	-	-	-	-	
	F	6¼ 159	6 152	6½ 165	7½ 191	6¼ 159	6¾ 171	7¼ 197	-	-	-	-	-	-	-	-	-	
	S	4¾ 121	4½ 114	5 127	6 152	4½ 114	5¼ 133	6¼ 159	4¾ 121	-	-	-	-	-	-	-	-	
1½" 38mm	T	5¼ 133	5 127	5½ 140	6½ 165	5¼ 133	5¾ 146	6¼ 171	5¼ 146	-	-	-	-	-	-	-	-	
	F	6½ 165	6¼ 159	6¾ 171	7¾ 197	6¼ 159	6¾ 171	8 203	6½ 165	7 178	8 203	-	-	-	-	-	-	
	S	5 127	4¾ 121	5¼ 133	6¼ 159	4¾ 121	5¼ 133	6 152	5 127	5½ 140	6½ 165	5 127	-	-	-	-	-	
2" 51mm	T	5¾ 146	5½ 140	6 152	7 178	5½ 140	6 152	7¼ 184	5¾ 146	6¼ 159	7¼ 184	5¾ 146	6½ 165	-	-	-	-	
	F	7 178	6¾ 171	7¼ 184	8¼ 210	6¾ 171	7¼ 184	8½ 216	7 178	7½ 191	8½ 216	7 178	7¾ 197	9 229	-	-	-	
	S	5¼ 133	5 127	5½ 140	6½ 165	5 127	5½ 140	6¼ 171	5¼ 133	5¼ 133	6¼ 159	5¼ 133	6 152	7¼ 184	5½ 140	-	-	
2½" 64mm	T	6 152	5¾ 146	6¼ 159	7¼ 184	6 152	6½ 165	7½ 191	6 152	6½ 165	7½ 191	6¼ 159	7 178	8¼ 210	6½ 165	7¼ 184	-	
	F	7½ 191	7¼ 184	7¾ 197	8¾ 222	7¼ 184	7¾ 197	9 229	7½ 191	8 203	9 229	7½ 191	8¼ 210	9½ 241	7¾ 197	8¼ 222	10 254	
	S	5½ 140	5¼ 133	5¾ 146	6¾ 171	5¼ 133	5¾ 146	7 178	5½ 140	6 152	7 178	5½ 140	6¼ 159	7½ 191	5¾ 146	6¼ 171	8 203	6 152
3" 76mm	T	6¼ 159	6 152	6½ 165	7½ 191	6¼ 159	6¾ 171	7¾ 197	6¼ 159	6¾ 171	7¾ 197	6¼ 159	7¼ 184	8½ 216	6¾ 171	7½ 191	9 229	7 178
	F	7¾ 197	7½ 191	8 203	9 229	7½ 191	8 203	9¼ 235	7¾ 197	8¼ 210	9¼ 235	7¾ 197	8½ 216	9¼ 235	8 203	9 229	10¼ 260	8¼ 210
	S	5¾ 146	5½ 140	6 152	7 178	5½ 140	6 152	7¼ 184	5¾ 146	6¼ 159	7¼ 184	5¾ 146	6½ 165	7¾ 197	6 152	7 178	8¼ 210	6¼ 159
4" 102mm	T	7½ 191	7¼ 184	7¾ 197	8¾ 222	7¼ 184	7¾ 197	9 229	7½ 191	8 203	9 229	7½ 191	8¼ 210	9½ 241	7¾ 197	8¼ 222	10 254	8 203
	F	9 229	8¾ 222	9¼ 235	10¼ 260	8¾ 222	9¼ 235	10½ 267	9 229	9½ 241	10½ 267	9 229	9¾ 248	11 279	9¼ 235	10¼ 260	11½ 292	9½ 241
	S	6¾ 171	6½ 165	7 178	8 203	6½ 165	7 178	8¼ 210	6¾ 171	7¼ 184	8¼ 210	6¾ 171	7½ 191	8¼ 210	7 178	8 203	9¼ 235	7¼ 184
5" 127mm	T	8 203	7¾ 197	8¼ 210	9¼ 235	7¾ 197	8¼ 210	9½ 241	8 203	8½ 216	9½ 241	8 203	8¾ 222	10 254	8¼ 210	9¼ 235	10½ 267	8½ 216
	F	9½ 241	9¼ 235	9¾ 248	10¾ 273	9¾ 235	9¾ 248	11 279	9½ 241	10 254	11 279	9½ 241	10¼ 260	11½ 292	9¾ 248	10¾ 273	12 305	10 254
	S	7¼ 184	7 178	7½ 191	8¼ 210	7 178	7½ 191	8¾ 214	7¼ 184	7¾ 197	8¾ 214	7¼ 184	8 203	9¼ 235	7½ 191	8¼ 210	9¼ 235	7¾ 197
6" 152mm	T	8¾ 222	8½ 216	9 229	10 254	8½ 216	9 229	10¼ 260	8¾ 222	9¼ 235	10¼ 260	8¾ 222	9½ 241	10¾ 273	9 229	10 254	11¼ 286	9¼ 235
	F	10 254	9¾ 248	10¼ 260	11¼ 286	9¾ 248	10¼ 260	11½ 292	10 254	10½ 267	11½ 292	10 254	10¾ 273	12 305	10¼ 260	11¼ 286	12½ 318	10½ 267
	S	7¾ 197	7½ 191	8 203	9 229	7½ 191	8 203	9¼ 235	7¾ 197	8¼ 210	9¼ 235	7¾ 197	8½ 216	9¼ 235	8 203	9 229	10¼ 260	8¼ 210
8" 203mm	T	8¾ 222	9½ 241	10 254	11 279	9¾ 248	10½ 267	11¼ 286	9¾ 248	10¼ 260	11¼ 286	10 254	10¾ 273	12 305	10½ 267	11 279	12½ 318	10½ 267
	F	11¼ 286	11 279	11½ 292	12½ 318	11 279	11½ 292	12¾ 324	11¼ 286	11¾ 298	12¾ 324	11¼ 286	12¼ 305	13¼ 337	11½ 292	12½ 318	13¾ 349	11¾ 298
10" 254mm	T	11¼ 286	11 279	11½ 292	12½ 318	11 279	11½ 292	12¾ 324	11¼ 286	11¾ 298	12¾ 324	11¼ 286	12¼ 305	13¼ 337	11½ 292	12½ 318	13¾ 349	11¾ 298
	F	12½ 318	12¼ 311	12¾ 324	13¾ 349	12¼ 311	12¾ 324	14 356	12½ 318	13 330	14 356	12½ 318	13¼ 337	14½ 368	12¾ 324	13¾ 349	15 381	13 330
12" 305mm	T	12¾ 311	12 305	12½ 318	13½ 343	12 305	12½ 318	13¾ 349	12¼ 311	12¾ 324	13¾ 349	12¼ 311	13 330	14¼ 362	12½ 318	13½ 343	14¾ 375	12¾ 324
	F	14 356	13¾ 349	14¼ 362	15¼ 387	13¾ 349	14¼ 362	15½ 394	14 356	14½ 368	15½ 394	14 356	14½ 368	16 406	14¼ 362	15¼ 387	16½ 419	14½ 368

1½" Channel
 Telesruct System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1¼" Framing System
 1½" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

PIPE SPACING TABLE

This chart, developed by Julius Getlan of Seelye Stevenson Value & Knect, consulting engineers, New York City, enables one to quickly determine the centerline-to-centerline dimension between any two size pipes on a rack.

Select the smaller pipe size at top and select the other at the side of the table. Where the appropriate columns intersect, the dimension is given.

These factors are included in the dimensions given:

- O.D. of flanges and fittings.
- 1" insulation over flanges and fittings.
- All fractional dimensions less than 1/4" were increased to the next larger 1/4".
- Clear space between fittings as follows:
 1. 1" between piping 3" and smaller.
 2. 1 1/2" between a pipe 3" and smaller and a pipe 4" or larger.
 3. 2" between piping 4" and larger.

T – denotes threaded IPS pipe. F – denotes flanged fittings on pipe. S – denotes soldered or brazed tubing.

Centerline to Centerline (In/mm)																				
3" (76mm)			4" (102mm)			5" (127mm)			6" (152mm)			8" (203mm)		10" (254mm)		12" (305mm)		Nominal Pipe Dia.		
T	F	S	T	F	S	T	F	S	T	F	S	T	F	T	F	T	F			
7 3/4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	T	3" 76mm
197	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	F	
9 1/4	10 1/2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S	
235	267	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	T	4" 102mm
7 1/4	8 1/2	6 1/2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	F	
184	216	165	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S	
9	10 1/4	8 1/4	10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	T	5" 127mm
229	260	210	254	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	F	
10 1/2	11 3/4	9 3/4	11 1/2	13	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S	
267	298	248	292	330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	T	6" 152mm
8 1/4	9 1/2	7 1/2	9 1/4	10 3/4	8 1/2	-	-	-	-	-	-	-	-	-	-	-	-	-	F	
210	241	191	235	273	216	-	-	-	-	-	-	-	-	-	-	-	-	-	S	
9 1/2	10 3/4	8 3/4	10 1/4	12	9 3/4	11	-	-	-	-	-	-	-	-	-	-	-	-	T	8" 203mm
241	273	222	260	305	248	279	-	-	-	-	-	-	-	-	-	-	-	-	F	
11	12 1/4	10 1/4	12	13 1/2	11 1/4	12 1/2	14	-	-	-	-	-	-	-	-	-	-	-	S	
279	311	260	305	343	286	318	356	-	-	-	-	-	-	-	-	-	-	-	T	10" 254mm
8 3/4	10	8	9 3/4	11 1/4	9	10 1/4	11 3/4	9 1/2	-	-	-	-	-	-	-	-	-	-	F	
222	254	203	248	286	229	260	298	241	-	-	-	-	-	-	-	-	-	-	S	
10 1/4	11 1/2	9 1/2	11 1/4	12 3/4	10 1/2	11 3/4	13 1/4	11	12 1/2	-	-	-	-	-	-	-	-	-	T	12" 305mm
260	292	241	286	324	267	298	337	279	318	-	-	-	-	-	-	-	-	-	F	
11 1/2	12 1/4	10 1/4	12 1/2	14	11 3/4	13	14 1/2	12 1/4	13 1/4	15	-	-	-	-	-	-	-	-	S	
292	311	273	318	356	298	330	368	311	337	381	-	-	-	-	-	-	-	-	T	10" 254mm
9 1/4	10 1/2	8 1/2	10 1/4	11 3/4	9 1/2	10 3/4	12 1/4	10	11 1/2	12 3/4	10 1/2	-	-	-	-	-	-	-	F	
235	267	216	260	298	241	273	311	254	292	324	267	-	-	-	-	-	-	-	S	
11 1/4	12 3/4	10 3/4	12 1/2	14	11 3/4	13	14 1/2	12 1/4	13 3/4	15	12 3/4	14 3/4	-	-	-	-	-	-	T	12" 305mm
286	324	273	318	356	298	330	368	311	349	381	324	375	-	-	-	-	-	-	F	
12 3/4	14	12	13 3/4	15 1/4	13	14 1/4	15 3/4	13 1/2	15	16 1/4	14	16 1/4	17.5	-	-	-	-	-	T	
324	356	305	349	387	330	362	400	343	381	413	356	413	17.5	-	-	-	-	-	F	
12 3/4	14	12	13 3/4	15 1/4	13	14 1/4	15 3/4	13 1/2	15	16 1/4	14	16 1/4	17 1/2	17 1/2	-	-	-	-	T	
324	356	305	349	387	330	362	400	343	381	413	356	413	445	445	-	-	-	-	F	
14	15 1/4	13 1/4	15	16 1/2	14 1/4	15 1/2	17	14 3/4	16 1/4	17 1/2	15 1/4	17 1/2	18 3/4	18 3/4	20	-	-	-	T	
356	387	337	381	419	362	394	432	375	413	445	387	445	476	476	508	-	-	-	F	
13 3/4	15	13	14 3/4	16 1/4	14	15 1/4	16 3/4	14 1/2	16	17 1/4	15	17 1/4	18 1/2	18 1/2	19 3/4	19 1/2	-	-	T	
349	381	330	375	413	356	387	425	368	406	438	381	438	470	470	502	495	-	-	F	
15 1/2	16 3/4	14 3/4	16 1/2	18	15 3/4	17	18 1/4	16 1/4	17 3/4	19	16 3/4	14	20 1/4	20 1/4	21 1/2	21 1/4	29	-	T	
394	425	375	419	457	400	432	464	413	451	483	425	356	514	514	546	540	737	-	F	



CHANNEL SELECTION FOR SCHEDULE 10 SPRINKLER PIPE TRAPEZE HANGERS

Note: Based on NFPA-13-1996 Section Modulus Table 3-10.1.7(a). Each of the following tables indicate the allowable span of the trapeze and the nominal pipe size for the specified channel. An entry of "-" indicates that the channel cannot be used for this span/pipe size combination. The table is based on a maximum allowable bending stress of 15 KSI and a midspan concentrated load from 15 ft of water-filled pipe, plus 250 lb.

Unistrut Channel	Section Modulus in ³ (cm ³)
P3000	0.154 2.52
P1000	0.202 3.31
P5500	0.391 6.41
P5000	0.628 10.29

Unistrut Channel	Section Modulus in ³ (cm ³)
P3001	0.431 7.06
P1001	0.572 9.37
P5501	1.153 18.89
P5001	1.916 31.40

Nominal Pipe Dia. (in)	Schedule 10 Pipe		I. D. (in)	Pipe Weight (p/f)	Water Weight (p/f)	Total Weight (p/f)
	O.D. (in)	Wall Thickness (in)				
1	1.315	0.109	1.097	1.41	0.42	1.83
1¼	1.660	0.109	1.442	1.81	0.73	2.54
1½	1.900	0.109	1.682	2.09	0.99	3.08
2	2.375	0.109	2.157	2.64	1.63	4.28
2½	2.875	0.120	2.635	3.53	2.44	5.97
3	3.500	0.120	3.260	4.34	3.73	8.07
3½	4.000	0.120	3.760	4.98	4.97	9.95
4	4.500	0.120	4.260	5.62	6.38	12.00
5	5.563	0.134	5.295	7.78	9.85	17.63
6	6.625	0.134	6.357	9.30	14.20	23.50
8	8.625	0.188	8.249	16.96	23.91	40.87
10	10.750	0.188	10.374	21.23	37.82	59.04

Trapeze Span	NFPA 13 Required Trapeze Section Modulus for Sch 10 Pipe											
	Pipe Diameter											
	1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	0.08	0.09	0.09	0.09	0.10	0.11	0.12	0.13	0.15	0.18	0.24	0.32
2' - 0"	0.11	0.12	0.12	0.13	0.13	0.15	0.16	0.17	0.20	0.24	0.32	0.43
2' - 6"	0.14	0.14	0.15	0.16	0.17	0.18	0.20	0.21	0.25	0.30	0.40	0.54
3' - 0"	0.17	0.17	0.18	0.19	0.20	0.22	0.24	0.26	0.31	0.36	0.48	0.65
4' - 0"	0.22	0.23	0.24	0.25	0.27	0.29	0.32	0.34	0.41	0.48	0.64	0.87
5' - 0"	0.28	0.29	0.30	0.31	0.34	0.37	0.40	0.43	0.51	0.59	0.80	1.08
6' - 0"	0.33	0.35	0.36	0.38	0.41	0.44	0.48	0.51	0.61	0.71	0.97	1.30
7' - 0"	0.39	0.40	0.41	0.44	0.47	0.52	0.55	0.60	0.71	0.83	1.13	1.52
8' - 0"	0.44	0.46	0.47	0.50	0.54	0.59	0.63	0.68	0.81	0.95	1.29	1.73
9' - 0"	0.50	0.52	0.53	0.56	0.61	0.66	0.71	0.77	0.92	1.07	1.45	1.95
10' - 0"	0.56	0.58	0.59	0.63	0.68	0.74	0.79	0.85	1.02	1.19	1.61	2.17

Values taken from NFPA 13 (1996 Edition), Table 2-6.1.5(a)

Trapeze Span	Single Channel Trapeze for Sch 10 Pipe											
	Pipe Diameter											
	1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	P3000	P3000	P3000	P3000	P3000	P3000	P3000	P3000	P3000	P1000	P5500	P5500
2' - 0"	P3000	P3000	P3000	P3000	P3000	P3000	P1000	P1000	P1000	P5500	P5500	P5000
2' - 6"	P3000	P3000	P3000	P1000	P1000	P1000	P1000	P5500	P5500	P5500	P5000	P5000
3' - 0"	P1000	P1000	P1000	P1000	P1000	P5500	P5500	P5500	P5500	P5500	P5000	N/A
4' - 0"	P5500	P5500	P5500	P5500	P5500	P5500	P5500	P5500	P5000	P5000	N/A	N/A
5' - 0"	P5500	P5500	P5500	P5500	P5500	P5500	P5000	P5000	P5000	P5000	N/A	N/A
6' - 0"	P5500	P5500	P5500	P5500	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A
7' - 0"	P5500	P5000	P5000	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A
8' - 0"	P5000	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A
9' - 0"	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10' - 0"	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Trapeze Span	Double Channel Trapeze for Sch 10 Pipe											
	Pipe Diameter											
	1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001
2' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001
2' - 6"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001
3' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P5501
4' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P5501	P5501
5' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P5501	P5501	P5501
6' - 0"	P3001	P3001	P3001	P3001	P3001	P1001	P1001	P1001	P5501	P5501	P5501	P5001
7' - 0"	P3001	P3001	P3001	P1001	P1001	P1001	P1001	P5501	P5501	P5501	P5501	P5001
8' - 0"	P1001	P1001	P1001	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5001	N/A
9' - 0"	P1001	P1001	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5501	P5001	N/A
10' - 0"	P1001	P5501	P5501	P5501	P5501	P5501	P5501	P5501	P5501	P5001	P5001	N/A

CHANNEL SELECTION FOR SCHEDULE 40 SPRINKLER PIPE TRAPEZE HANGERS

Note: Based on NFPA-13-1996 Section Modulus Table 3-10.1.7(a). Each of the following tables indicate the allowable span of the trapeze and the nominal pipe size for the specified channel. An entry of "-" indicates that the channel cannot be used for this span/pipe size combination. The table is based on a maximum allowable bending stress of 15 KSI and a midspan concentrated load from 15 ft of water-filled pipe, plus 250 lb.

Unistrut Channel	Section Modulus in ³ (cm ³)
P3000	0.154 2.52
P1000	0.202 3.31
P5500	0.391 6.41
P5000	0.628 10.29

Unistrut Channel	Section Modulus in ³ (cm ³)
P3001	0.431 7.06
P1001	0.572 9.37
P5501	1.153 18.89
P5001	1.916 31.40

Nominal Pipe Dia. (in)	Schedule 40 Pipe			Pipe Weight (p/f)	Water Weight (p/f)	Total Weight (p/f)
	O.D. (in)	Wall Thickness (in)	I. D. (in)			
1	1.315	0.133	1.049	1.68	0.39	2.07
1¼	1.660	0.140	1.380	2.27	0.67	2.94
1½	1.900	0.145	1.610	2.72	0.91	3.63
2	2.375	0.154	2.067	3.66	1.50	5.16
2½	2.875	0.203	2.469	5.80	2.14	7.94
3	3.500	0.216	3.068	7.58	3.31	10.89
3½	4.000	0.226	3.548	9.12	4.42	13.54
4	4.500	0.237	4.026	10.80	5.70	16.50
5	5.563	0.258	5.047	14.63	8.95	23.58
6	6.625	0.280	6.065	18.99	12.93	31.92
8	8.625	0.322	7.981	28.58	22.38	50.96
10	10.750	0.365	10.020	40.52	35.28	75.80

Trapeze Span	NFPA 13 Required Trapeze Section Modulus for Sch 40 Pipe											
	Pipe Diameter											
	1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	0.08	0.09	0.09	0.10	0.11	0.12	0.13	0.15	0.18	0.22	0.30	0.41
2' - 0"	0.11	0.12	0.12	0.13	0.15	0.16	0.18	0.20	0.24	0.29	0.40	0.55
2' - 6"	0.14	0.15	0.15	0.16	0.18	0.21	0.22	0.25	0.30	0.36	0.50	0.68
3' - 0"	0.17	0.18	0.18	0.20	0.22	0.25	0.27	0.30	0.36	0.43	0.60	0.82
4' - 0"	0.22	0.24	0.24	0.26	0.29	0.33	0.36	0.40	0.48	0.58	0.80	1.09
5' - 0"	0.28	0.29	0.30	0.33	0.37	0.41	0.45	0.49	0.60	0.72	1.00	1.37
6' - 0"	0.34	0.35	0.36	0.39	0.44	0.49	0.54	0.59	0.72	0.87	1.20	1.64
7' - 0"	0.39	0.41	0.43	0.46	0.51	0.58	0.63	0.69	0.84	1.01	1.41	1.92
8' - 0"	0.45	0.47	0.49	0.52	0.59	0.66	0.72	0.79	0.96	1.16	1.61	2.19
9' - 0"	0.50	0.53	0.55	0.59	0.66	0.74	0.81	0.89	1.08	1.30	1.81	2.46
10' - 0"	0.56	0.59	0.61	0.65	0.74	0.82	0.90	0.99	1.20	1.44	2.01	2.74

Values taken from NFPA 13 (1996 Edition), Table 2-6.1.5(a)

Trapeze Span	Single Channel Trapeze for Sch 40 Pipe											
	Pipe Diameter											
	1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	P3000	P3000	P3000	P3000	P3000	P3000	P3000	P3000	P1000	P5500	P5500	P5000
2' - 0"	P3000	P3000	P3000	P3000	P3000	P1000	P1000	P1000	P5500	P5500	P5000	P5000
2' - 6"	P3000	P3000	P3000	P1000	P1000	P5500	P5500	P5500	P5500	P5500	P5000	N/A
3' - 0"	P1000	P1000	P1000	P1000	P5500	P5500	P5500	P5500	P5500	P5000	P5000	N/A
4' - 0"	P5500	P5500	P5500	P5500	P5500	P5500	P5500	P5000	P5000	P5000	N/A	N/A
5' - 0"	P5500	P5500	P5500	P5500	P5500	P5000	P5000	P5000	P5000	N/A	N/A	N/A
6' - 0"	P5500	P5500	P5500	P5500	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A
7' - 0"	P5500	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A
8' - 0"	P5000	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A	N/A
9' - 0"	P5000	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10' - 0"	P5000	P5000	P5000	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Trapeze Span	Double Channel Trapeze for Sch 40 Pipe											
	Pipe Diameter											
	1"	1¼"	1½"	2"	2½"	3"	3½"	4"	5"	6"	8"	10"
1' - 6"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001
2' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001
2' - 6"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P5501
3' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P5501	P5501
4' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P5501	P5501	P5501
5' - 0"	P3001	P3001	P3001	P3001	P3001	P3001	P1001	P1001	P5501	P5501	P5501	P5001
6' - 0"	P3001	P3001	P3001	P3001	P1001	P1001	P1001	P5501	P5501	P5501	P5001	P5001
7' - 0"	P3001	P3001	P3001	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5001	N/A
8' - 0"	P1001	P1001	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5001	P5001	N/A
9' - 0"	P1001	P1001	P1001	P5501	P5501	P5501	P5501	P5501	P5501	P5001	N/A	N/A
10' - 0"	P1001	P5501	P5501	P5501	P5501	P5501	P5501	P5501	P5001	P5001	N/A	N/A



ELECTRICAL METALLIC TUBING (EMT) - THIN WALL

Tubing Size (Nominal) In	Outside Diameter In (mm)	Inside Diameter In (mm)	Weight Of Tubing Lbs/Ft (kg/m)
3/8	0.577	0.497	0.23
	14.7	12.6	0.34
1/2	0.706	0.626	0.29
	17.9	15.9	0.43
3/4	0.922	0.830	0.44
	23.4	21.1	0.65
1	1.163	1.055	0.64
	29.5	26.8	0.95
1 1/4	1.510	1.388	0.95
	38.4	35.3	1.41
1 1/2	1.740	1.618	1.10
	44.2	41.1	1.64
2	2.197	2.075	1.40
	55.8	52.7	2.08
2 1/2	2.875	2.731	2.30
	73.0	69.4	3.42
3	3.500	3.356	2.70
	88.9	85.2	4.02
3 1/2	4.000	3.834	3.40
	101.6	97.4	5.06
4	4.500	4.334	4.00
	114.3	110.1	5.95

INTERMEDIATE METALLIC CONDUIT (IMC)

Conduit Size (Nominal) In	Outside Diameter In (mm)	Inside Diameter In (mm)	Weight Of Conduit Lbs/Ft (kg/m)	Weight of Conduit and Conductor Lbs/Ft (kg/m)
1/2	0.815	0.745	0.60	0.12
	20.7	18.9	0.89	0.18
3/4	1.029	0.954	0.82	1.13
	26.1	24.2	1.22	1.68
1	1.290	1.205	1.16	1.82
	32.8	30.6	1.73	2.71
1 1/4	1.638	1.553	1.50	2.67
	41.6	39.4	2.23	3.97
1 1/2	1.883	1.793	1.82	3.42
	47.8	45.5	2.71	5.09
2	2.360	2.266	2.42	5.04
	59.9	57.6	3.60	7.50
2 1/2	2.857	2.727	4.01	7.75
	72.6	69.3	5.97	11.53
3	3.476	3.346	4.43	10.69
	88.3	85.0	6.59	15.91
3 1/2	3.971	3.841	5.73	13.46
	100.9	97.6	8.53	20.03
4	4.466	4.336	6.38	16.37
	113.4	110.1	9.49	24.36

COPPER TUBE (TYPE L)

Nom. Tube Size	O.D. Tubing In (mm)	O.D. In (mm)	Wall Thick. In (mm)	Weight Lbs/Ft (kg/m)	Weight Water Lbs/Ft (kg/m)
1/4"	3/8	0.375	0.030	0.126	0.034
	10	9.5	0.8	0.19	0.05
3/8"	1/2	0.500	0.035	0.198	0.062
	13	12.7	0.9	0.29	0.09
1/2"	5/8	0.625	0.040	0.285	0.100
	16	15.9	1.0	0.42	0.15
5/8"	3/4	0.750	0.042	0.362	0.151
	19	19.1	1.1	0.54	0.22
3/4"	7/8	0.875	0.045	0.455	0.209
	22	22.2	1.1	0.68	0.31
1"	1 1/8	1.125	0.050	0.655	0.357
	29	28.6	1.3	0.97	0.53
1 1/4"	1 1/4	1.375	0.055	0.884	0.546
	35	34.9	1.4	1.32	0.81
1 1/2"	1 5/8	1.625	0.060	1.140	0.767
	41	41.3	1.5	1.70	1.14
2"	2 1/8	2.125	0.070	1.750	1.341
	54	54.0	1.8	2.60	2.00
2 1/2"	2 5/8	2.625	0.080	2.480	2.064
	67	66.7	2.0	3.69	3.07
3"	3 1/8	3.125	0.090	3.330	2.949
	79	79.4	2.3	4.96	4.39
3 1/2"	3 5/8	3.625	0.100	4.290	3.989
	92	92.1	2.5	6.38	5.94
4"	4 1/8	4.125	0.110	5.380	5.188
	105	104.8	2.8	8.01	7.72
5"	5 1/8	5.125	0.125	7.610	8.081
	130	130.2	3.2	11.32	12.03
6"	6 1/8	6.125	0.140	10.200	11.616
	156	155.6	3.6	15.18	17.29
8"	8 1/8	8.125	0.200	19.290	20.289
	206	206.4	5.1	28.71	30.19
10"	10 3/8	10.125	0.250	30.100	31.590
	257	257.2	6.4	44.79	47.01
12"	12 3/8	12.125	0.280	40.400	45.426
	308	308.0	7.1	60.12	67.60

COPPER TUBE (TYPE K)

Nom. Tube Size	O.D. Tubing In (mm)	O.D. In (mm)	Wall Thick. In (mm)	Weight Lbs/Ft (kg/m)	Weight Water Lbs/Ft (kg/m)
1/4"	3/8	0.375	0.035	0.145	0.032
	10	9.53	0.89	0.22	0.05
3/8"	1/2	0.500	0.005	0.269	0.055
	13	12.70	0.13	0.40	0.08
1/2"	5/8	0.625	0.049	0.344	0.094
	16	15.88	1.24	0.51	0.14
5/8"	3/4	0.750	0.049	0.418	0.144
	19	19.05	1.24	0.62	0.21
3/4"	7/8	0.875	0.065	0.641	0.188
	22	22.23	1.65	0.95	0.28
1"	1 1/8	1.125	0.065	0.839	0.337
	29	28.58	1.65	1.25	0.50
1 1/4"	1 1/4	1.375	0.065	1.040	0.527
	35	34.93	1.65	1.55	0.78
1 1/2"	1 5/8	1.625	0.072	1.360	0.743
	41	41.28	1.83	2.02	1.11
2"	2 1/8	2.125	0.083	2.060	1.310
	54	53.98	2.11	3.07	1.95
2 1/2"	2 5/8	2.625	0.095	2.920	2.000
	67	66.68	2.41	4.35	2.98
3"	3 1/8	3.125	0.109	4.000	2.960
	79	79.38	2.77	5.95	4.40
3 1/2"	3 5/8	3.625	0.120	5.120	3.900
	92	92.08	3.05	7.62	5.80
4"	4 1/8	4.125	0.134	6.510	5.060
	105	104.78	3.40	9.69	7.53
5"	5 1/8	5.125	0.160	9.670	8.000
	130	130.18	4.06	14.39	11.91
6"	6 1/8	6.125	0.192	13.870	11.200
	156	155.58	4.88	20.64	16.67
8"	8 1/8	8.125	0.271	25.900	19.500
	206	206.38	6.88	38.54	29.02
10"	10 3/8	10.125	0.338	40.300	30.423
	257	257.18	8.59	59.97	45.27
12"	12 3/8	12.125	0.405	57.800	43.675
	308	307.98	10.29	86.02	65.00

RIGID STEEL (HEAVY DUTY) CONDUIT

Conduit Size (Nominal) In	I. D. Of Conduit In (mm)	O. D. Of Conduit In (mm)	O. D. Of Coupling In (mm)	Weight of Conduit Lbs/Ft (kg/m)	Maximum Weight* Of Conduit And Conductor Lead Covered Lbs/Ft (kg/m)	Not Lead Covered Lbs/Ft (kg/m)
1/2	0.622 15.8	0.840 21.3	1.063 27.0	0.85 1.26	1.20 1.79	1.00 1.49
3/4	0.824 20.9	1.050 26.7	1.297 32.9	1.13 1.68	1.80 2.68	1.40 2.08
1	1.049 26.6	1.315 33.4	1.563 39.7	1.68 2.50	2.60 3.87	2.30 3.42
1 1/4	1.380 35.1	1.660 42.2	1.969 50.0	2.28 3.39	4.30 6.40	3.60 5.36
1 1/2	1.610 40.9	1.900 48.3	2.234 56.7	2.73 4.06	5.90 8.78	4.50 6.70
2	2.067 52.5	2.375 60.3	2.719 69.1	3.68 5.48	8.50 12.65	7.20 10.71
2 1/2	2.469 62.7	2.875 73.0	3.313 84.2	5.82 8.66	11.50 17.11	10.20 15.18
3	3.068 77.9	3.500 88.9	3.938 100.0	7.62 11.34	16.50 24.55	14.50 21.58
3 1/2	3.548 90.1	4.000 101.6	4.438 112.7	9.20 13.69	19.00 28.28	17.50 26.04
4	4.026 102.3	4.500 114.3	4.938 125.4	10.89 16.21	24.80 36.91	21.50 32.00
5	5.047 128.2	5.563 141.3	6.296 159.9	14.81 22.04	35.90 53.43	30.80 45.84
6	6.065 154.1	6.625 168.3	7.358 186.9	19.19 28.56	50.70 75.45	43.40 64.59

* Maximum weight equals weight of rigid conduit plus weight of heaviest conductor combination (from the National Electrical Code Handbook.)

Nominal Pipe Size In	Max. Span Ft (m)	Nominal Pipe Size In	Max. Span Ft (m)
1	7 2.13	8	19 5.79
1 1/2	9 2.74	10	22 6.71
2	10 3.05	12	23 7.01
2 1/2	11 3.35	14	25 7.62
3	12 3.66	16	27 8.23
3 1/2	13 3.96	18	28 8.53
4	14 4.27	20	30 9.14
5	16 4.88	24	32 9.75

The above spacing based on a combined bending and shear stress of 1500 PSI when pipe is filled with water and the pitch of the line is such that a sag of 0.1 in. between supports is permissible.

CONDUIT SUPPORTS

346-12. Supports. Rigid metal conduit shall be installed as a complete system as provided in Article 344 and shall be securely fastened in place. Conduit shall be firmly fastened within 3 feet (914 mm) of each outlet box, junction box, cabinet, or fitting. Conduit shall be supported at least every 10 feet (3.05 m).

Exception: If made up with threaded couplings, it shall be permissible to support straight runs of rigid metal conduit in accordance with Table 344.30 (B)(2), provided such supports prevent transmission of stresses to termination where conduit is deflected between supports.

Table 344.30 (B)(2)
Support for Rigid Metal Conduit

Conduit Size In (mm)	Maximum Distance Between Supports Ft (m)
1/2-3/4	10
13 - 19	3.05
1	12
25	3.66
1 1/4- 1 1/2	14
32 - 38	4.27
2- 2 1/2	16
51 - 64	4.88
3 & larger	20
76 - Larger	6.10

SCHEDULE 40: PVC PLASTIC PIPE

Pipe Size (Nominal) In	Outside Diameter In (mm)	Inside Diameter In (mm)	Pipe Weight Lbs/Ft (kg/m)	Pipe and Water Weight Lbs/Ft (kg/m)
1/4	0.540 13.7	0.354 9.0	0.081 0.12	0.12 0.18
3/8	0.675 17.1	0.483 12.3	0.109 0.16	0.19 0.28
1/2	0.840 21.3	0.608 15.4	0.161 0.24	0.29 0.43
3/4	1.050 26.7	0.810 20.6	0.214 0.32	0.44 0.65
1	1.315 33.4	1.033 26.2	0.315 0.47	0.68 1.01
1 1/4	1.660 42.2	1.364 34.6	0.426 0.63	1.06 1.58
1 1/2	1.900 48.3	1.592 40.4	0.509 0.76	1.37 2.04
2	2.375 60.3	2.049 52.0	0.682 1.01	2.11 3.14
2 1/2	2.875 73.0	2.445 62.1	1.076 1.60	3.11 4.63
3	3.500 88.9	3.042 77.3	1.409 2.10	4.55 6.77
4	4.500 114.3	3.998 101.5	2.006 2.99	7.44 11.07
6	6.625 168.3	6.031 153.2	3.535 5.26	15.90 23.66
8	8.625 219.1	7.943 201.8	5.305 7.89	26.75 39.81
10	10.750 273.1	9.976 253.4	7.532 11.21	41.35 61.54

1 5/8" Channel
 Telesruct System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/2" Framing System
 1 3/4" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index




DATA FOR SCHEDULE STEEL PIPE

Nom. Size In	Pipe Schedule	Outside Dia. In (mm)	Inside Dia. In (mm)	Pipe Weight Lbs/Ft (kg/m)	Pipe and Water Weight Lbs/Ft (kg/m)
1/8	40	0.405 10.3	0.269 6.8	0.24 0.36	0.27 0.40
	80	0.405 10.3	0.215 5.5	0.31 0.46	0.33 0.49
1/4	40	0.540 13.7	0.364 9.2	0.42 0.63	0.47 0.70
	80	0.540 13.7	0.302 7.7	0.53 0.79	0.57 0.85
3/8	40	0.675 17.1	0.493 12.5	0.57 0.85	0.65 0.97
	80	0.675 17.1	0.423 10.7	0.74 1.10	0.80 1.19
1/2	40	0.840 21.3	0.622 15.8	0.85 1.26	0.98 1.46
	80	0.840 21.3	0.546 13.9	1.09 1.62	1.19 1.77
	160	0.840 21.3	0.464 11.8	1.31 1.95	1.38 2.05
3/4	40	1.050 26.7	0.824 20.9	1.13 1.68	1.36 2.02
	80	1.050 26.7	0.742 18.8	1.47 2.19	1.66 2.47
	160	1.050 26.7	0.612 15.5	1.94 2.89	2.07 3.08
1	40	1.315 33.4	1.049 26.6	1.68 2.50	2.05 3.05
	80	1.315 33.4	0.957 24.3	2.17 3.23	2.48 3.69
	160	1.315 33.4	0.815 20.7	2.84 4.23	3.07 4.57
1 1/4	40	1.660 42.2	1.380 35.1	2.27 3.38	2.92 4.35
	80	1.660 42.2	1.278 32.5	2.99 4.45	3.55 5.28
	160	1.660 42.2	1.160 29.5	3.76 5.60	4.22 6.28
1 1/2	40	1.900 48.3	1.610 40.9	2.71 4.03	3.60 5.36
	80	1.900 48.3	1.500 38.1	3.63 5.40	4.39 6.53
	160	1.900 48.3	1.338 34.0	4.85 7.22	5.46 8.13
2	40	2.375 60.3	2.067 52.5	3.65 5.43	5.10 7.59
	80	2.375 60.3	1.939 49.3	5.02 7.47	6.30 9.38
	160	2.375 60.3	1.687 42.8	7.45 11.09	8.42 12.53
2 1/2	40	2.875 73.0	2.469 62.7	5.79 8.62	7.86 11.70
	80	2.875 73.0	2.323 59.0	7.65 11.38	9.49 14.12
	160	2.875 73.0	2.125 54.0	10.00 14.88	11.54 17.17
3	40	3.500 88.9	3.068 77.9	7.57 11.27	10.77 16.03
	80	3.500 88.9	2.900 73.7	10.24 15.24	13.11 19.51
	160	3.500 88.9	2.624 66.6	14.31 21.30	16.65 24.78
3 1/2	40	4.000 101.6	3.548 90.1	9.10 13.54	13.39 19.93
	80	4.000 101.6	3.364 85.4	12.49 18.59	16.35 24.33

Nom. Size In	Pipe Schedule	Outside Dia. In (mm)	Inside Dia. In (mm)	Pipe Weight Lbs/Ft (kg/m)	Pipe and Water Weight Lbs/Ft (kg/m)
4	40	4.500 114.3	4.026 102.3	10.78 16.04	16.30 24.26
	80	4.500 114.3	3.826 97.2	14.97 22.28	19.95 29.69
	120	4.500 114.3	3.624 92.0	18.98 28.25	23.45 34.90
	160	4.500 114.3	3.438 87.3	22.48 33.45	26.51 39.45
5	40	5.563 141.3	5.047 128.2	14.60 21.73	23.27 34.63
	80	5.563 141.3	4.813 122.2	20.75 30.88	28.64 42.62
	120	5.563 141.3	4.563 115.9	27.01 40.20	34.09 50.73
	160	5.563 141.3	4.313 109.5	32.92 48.99	39.26 58.43
6	40	6.625 168.3	6.065 154.1	18.95 28.20	31.48 46.85
	80	6.625 168.3	5.761 146.3	28.54 42.47	39.84 59.29
	120	6.625 168.3	5.501 139.7	36.35 54.09	46.66 69.44
	160	6.625 168.3	5.187 131.7	45.30 67.41	54.47 81.06
	20	8.625 219.1	8.125 206.4	22.34 33.25	44.82 66.70
	30	8.625 219.1	8.071 205.0	24.67 36.71	46.85 69.72
8	40	8.625 219.1	7.981 202.7	28.52 42.44	50.21 74.72
	60	8.625 219.1	7.813 198.5	35.60 52.98	56.39 83.92
	80	8.625 219.1	7.625 193.7	43.34 64.50	63.14 93.96
	100	8.625 219.1	7.437 188.9	50.89 75.73	69.73 103.77
	120	8.625 219.1	7.187 182.5	60.65 90.26	78.23 116.42
	140	8.625 219.1	7.001 177.8	67.68 100.72	84.37 125.56
	160	8.625 219.1	6.813 173.1	74.61 111.03	90.42 134.56
	20	10.750 273.1	10.250 260.4	28.01 41.68	63.78 94.92
10	30	10.750 273.1	10.136 257.5	34.20 50.90	69.19 102.97
	40	10.750 273.1	10.020 254.5	40.44 60.18	74.63 111.06
	60	10.750 273.1	9.750 247.7	54.68 81.37	87.05 129.54
	80	10.750 273.1	9.562 242.9	64.36 95.78	95.50 142.12
	100	10.750 273.1	9.312 236.5	76.95 114.51	106.47 158.44
	120	10.750 273.1	9.062 230.2	89.20 132.74	117.16 174.35
	140	10.750 273.1	8.750 222.3	104.02 154.80	130.09 193.60
	160	10.750 273.1	8.500 215.9	115.52 171.91	140.13 208.54

15/16" Channel
 Teleslur System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 1/2" Framing System
 1 3/4" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

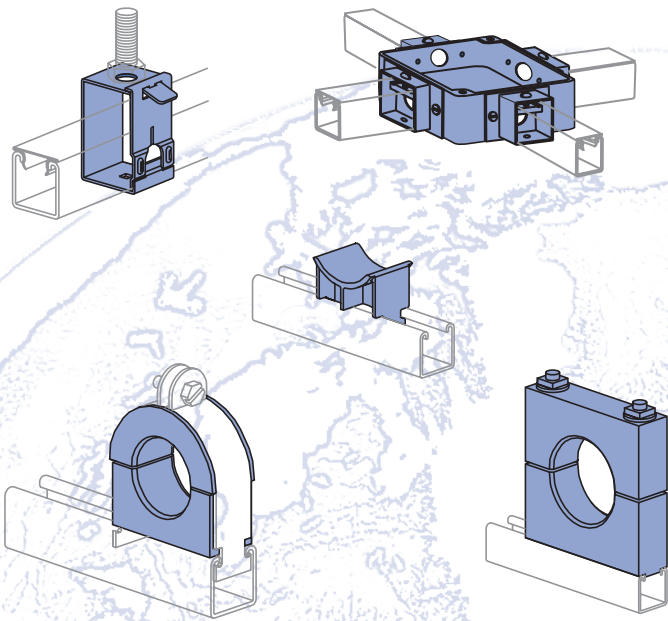

Electrical Fittings.....	122-124
Receptacles.....	124-125
Fixture Hangers.....	125
Accessories and Connectors.....	125-126
Junction Boxes	126
In-Channel Joiners	127
Swivel Hangers	127
Cable Entrance Tubing and Accessories	128-130
Electrical Fittings Technical Data.....	131-132

MATERIAL

Unistrut fittings, unless noted, are made from hot-rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A575, A576, A635, or A36. The fitting steel also meets the physical requirements of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

Maple cable saddles, cable clamps and bus bar clamps are made from kiln-dry maple treated with paraffin to a depth of $\frac{1}{16}$ " (1.6mm). Special sizes of clamps can be fabricated upon request. Porcelain cable clamps are made by the dry process and white glazed. Cable saddles are fiberglass-reinforced polyester.

CHANNEL RACEWAYS

The Unistrut Metal Framing System includes an exclusive combination of channel, fittings and hardware listed under new UL classification 5B. This classification covers strut-type channel raceways and fittings for use in accordance with Article 384 of the National Electrical Code, NFPA 70. Included are metal strut-type channel raceways at least .071 inch (1.81mm) thick and metal or non-metal closure strips at least .040 inch (1.02mm) thick.

The Unistrut system requires no welding, drilling or other complex fabrication techniques. This means faster, easier solutions for virtually any electrical support problem.

Unistrut channel offers structural and spanning capabilities not available with conventional surface raceway products and is available in continuous lengths of up to 20 feet. Just as important, it is part of an integrated system that can be used for raceways, trapeze hangers, cable-tray supports, lighting grids, fluorescent-fixture supports and countless other electrical applications.

CHANNEL COMPATABILITY

All of the electrical components in this section are intended for use with any of the $1\frac{5}{8}$ " wide channel. They are not intended for use with $1\frac{1}{4}$ " or $1\frac{3}{16}$ " framing systems.

FINISHES

Components listed in this section are available in:

- Electro-galvanized (EG), conforming to ASTM B633 Type III SC1;
- Hot-dipped galvanized (HG), conforming to ASTM A123 or A153,
- Perma-Green III (GR),
- Plain (PL).

Note: Many Unistrut Metal Framing components, when used with appropriate closures, are UL® listed, and CSA approved.

DESIGN LOAD

Design load data, where shown, is based on the ultimate strength of the connection with a safety factor of 2.5, unless otherwise noted.

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

LISTINGS

UL File No. - E19459	Channel & Closure Strips
UL File No. - E25629	Fittings
CSA File No. - 013669	All Products



Electrical Fittings

1 5/8" Channel

Telesrnut System

Nuts & Hardware

General Fittings

Pipe/Conduit Supports

Electrical Fittings

Concrete Inserts

1 1/4" Framing System


1 3/16" Framing System

Fiberglass System

Special Metals

PrimeAngle System

Product Index

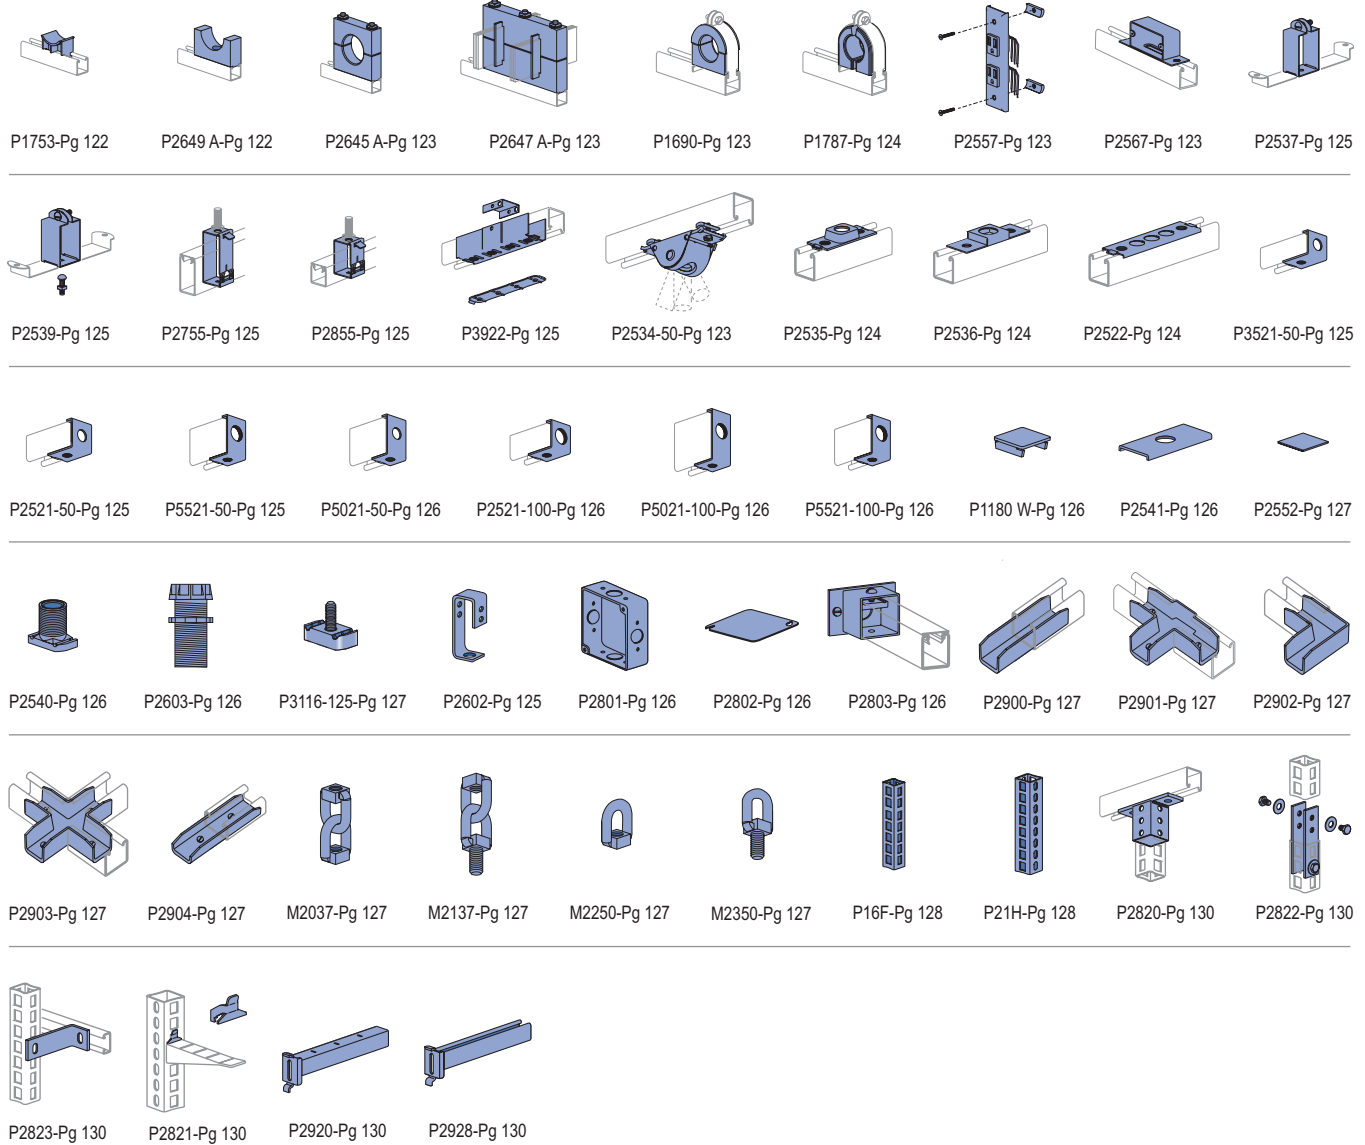


P2649A THRU P2649H

MAPLE CABLE SADDLES


P1753, P1754

CABLE SADDLES



- 3/8" Flat Head Machine Screw included.
 - Specify hole size when ordering.
 - Order channel nuts as required.
- Material: Maple hardwood paraffin impregnated.

Part No.	Hole Size In (mm)	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P2649A	0 - 1	3	1 3/4	31
	0 - 25	76	45	14.1
P2649B	1 - 1 1/2	3 1/2	2	38
	25 x 38	89	51	17.2
P2649C	1 1/2 - 2	4	2 1/4	47
	38 - 51	102	57	21.3
P2649D	2 - 2 1/2	4 1/2	2 1/2	57
	51 x 64	114	65	25.9
P2649E	2 1/2 - 3	5	2 3/4	68
	64 - 76	127	70	30.8
P2649F	3 - 3 1/2	5 1/2	3	80
	76 x 89	140	76	36.3
P2649G	3 1/2 - 4	6	3 1/4	94
	89 - 102	152	83	42.6
P2649H	over 4			
	over 102			




Part Number	"A" In (mm)	Maximum Cable Dia. In (mm)	Wt/100 pcs Lbs (kg)
P1753 FG	2 13/16	3	12
	71	76	5.4
P1754 FG	3 3/4	4 1/2	17
	95	114	7.7
P1753 PO	3	3	75
	76	76	34.0
P1754 PO	4	4 1/2	95
	102	114	43.1

Material: FG - Fiberglass Reinforced Polyester, PO - Dry Process White Glazed Porcelain

P2645A THRU P2645H

MAPLE CABLE CLAMPS




Part No.	Hole Size In (mm)	"A" & "B" Dimensions In (mm)	Wt/100 pcs Lbs (kg)
P2645A	0 - 1 0 - 25	3½ 89	84 38.1
P2645B	1 - 1½ 25 x 38	4 102	102 46.3
P2645C	1½ - 2 38 - 50.8	4½ 114	121 54.9
P2645D	2 - 2½ 51 x 64	5½ 140	165 74.8
P2645E	2½ - 3 64 - 76	6 152	189 85.7
P2645F	3 - 3½ 76 x 89	6½ 165	215 97.5
P2645G	3½ - 4 89 - 102	7 178	243 110.2
P2645H	over 4 over 102	-	-

- 3/8" studs, square nuts and washers included.
 - Specify hole size when ordering.
 - Order channel nuts as required.
- Material: Maple hardwood paraffin impregnated.

P2647A THRU P2647F

4" (101.6) BUS BAR MAPLE CLAMPS

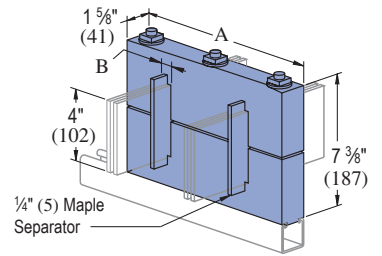


- 1/2" studs, square nuts and washers are included.
 - Channel nuts must be ordered separately.
 - Bus bar maple clamps also available in 1/4" (6.4) x 2" (50.8) and 1/4" (6.4) x 6" (152.4).
- Material: Paraffin impregnated maple hardwood.

Part No.	"A" In (mm)	"B" In (mm)	No. Bus Separators	No. Bars Per Leg	Wt/100 pcs Lbs (kg)
P2647A	8½ 216	3/32 7.1	0	1	421 191.0
P2647B	9½ 241	13/16 21	2	2	465 210.9
P2647C	10½ 267	15/16 33	4	3	509 230.9
P2647D	11½ 292	113/16 46	6	4	553 250.8
P2647E	12½ 318	23/8 60	8	5	597 270.8
P2647F	13½ 343	27/8 73	10	6	631 286.2

P1690 THRU P1697

MAPLE CABLE CLAMPS




Part No.	Steel Clamp No.	Hole Size In (mm)	"A" In (mm)	Wt/100 pcs Lbs (kg)
P1690	P1113 E	0 - 5/8 0 - 16	1½ 38	24 10.9
P1691	P1115 E	½ - 1 13 - 25	2½ 54	42 19.1
P1692	P1117 E	¾ - 1½ 19 x 38	25/8 67	54 24.5
P1693	P1118 E	1¼ - 1¾ 32 x 45	3 76	65 29.5
P1694	P1119 E	1½ - 2¼ 38 x 57	35/8 92	84 38.1
P1695	P1120 E	2 - 2½ 51 x 65	4½ 105	107 48.5
P1696	P1121 E	2¼ - 3 57 - 76	45/8 118	123 55.8
P1697	P1123 E	3 - 4 76 - 102	5¾ 146	163 73.9

- Use with steel clamp and Everdur hardware. Order clamp separately.
 - Specify hole size when ordering.
- Material: Paraffin impregnated maple hardwood.

P2557

DUPLEX GROUNDED RECEPTACLE

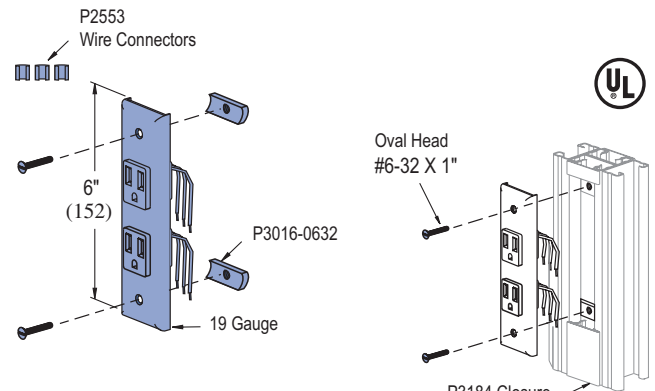


- Finish: White powder coat.
- 125 V, 15 amp receptacle, NEMA configuration 5-15R, cover plate.
 - #6 screws, nuts and wire connectors included.
 - Leads are 14 gauge 105°C plastic covered.
 - Ground wire is green 16 gauge.

Wt/100 pcs: 38 Lbs (17.2 kg)

P2534-50, P2534-75

CONDUIT SWING FITTING

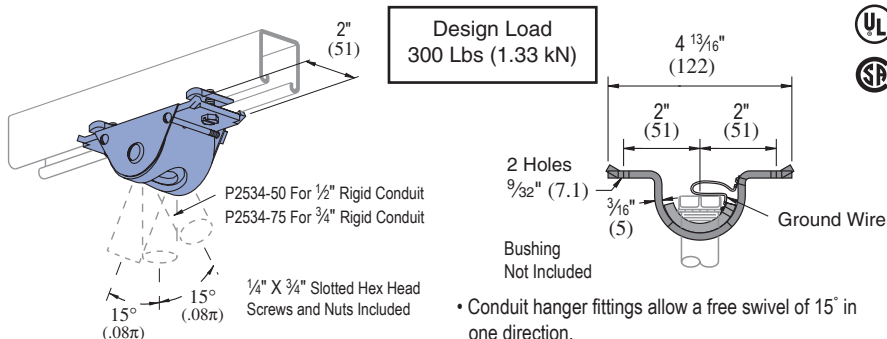

Design Load
300 Lbs (1.33 kN)

2 Holes
9/32" (7.1)

Bushing
Not Included


Ground Wire

- Conduit hanger fittings allow a free swivel of 15° in one direction.
- Fitting may be mounted to the slot side of the Unistrut channel or to the back.

Wt/100 pcs: 96 Lbs (43.5 kg)

P2567

OUTLET BOX

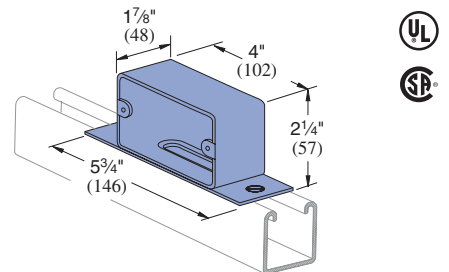

Material: 14 Gauge (.075)
Assembly: 1 Box, 2 Screws, 2 Channel Nuts


Wt/100 pcs: 88 Lbs (47.8 kg)

15/16" Channel
Telesnut System
Nuts & Hardware
General Fittings
Pipe/Conduit Supports
Electrical Fittings
Concrete Inserts
1 1/4" Framing System
1 3/16" Framing System
Fiberglass System
Special Metals
PrimeAngle System
Product Index



P1787 THRU P1795

PORCE-A-CLAMP™



Patents Pending
 Strap Material: Electro-galvanized Steel (EG) or Stainless Steel (SS)
 Use With: All 1½" channel


Porce-A-Clamp™

- Non-Breakable TPE Material.
- U.V. Resistant.
- U.L. Listed.
- Optional Stainless Steel Clamps.
- Tapered Flange to Protect Cable.
- Dielectric Strength 640 Volts Per Mil.
- One Piece Insulator.
- Replaces Porcelain & Maple Cable Clamp.
- For use in accordance with National Electrical Code ANSI/NFPA 70.
- Includes Pipe Strap.
- Temperature Rating -50°F to +275°F (-45°C to +135°C)

Part Number	Hole Size In (mm)	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P1787A	⅜ 10	1.36 35	1.82 46	25 11.3
P1787B	½ 13			
P1787C	⅝ 16			
P1788	¾ 19	1.86 47	2.34 59	37 16.8
P1788A	⅞ 22			
P1788B	1 25			
P1788C	1 ⅛ 29			
P1789	1 ¼ 32	2.36 60	2.86 73	58 16.8
P1789A	1 ⅜ 35			
P1789B	1 ½ 38			
P1789C	1 ⅝ 41			
P1790	1 ¾ 45			
P1790A	1 ⅞ 48	2.86 73	3.50 89	76 34.5
P1790B	2 51			
P1790C	2 ⅛ 54			
P1791	2 ¼ 57	3.36 85	4.05 103	90 40.8
P1791A	2 ⅝ 60			

Part Number	Hole Size In (mm)	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)
P1791B	2 ½ 64	3.36 85	4.05 103	90 40.8
P1791C	2 ⅝ 67			
P1792	2 ¾ 70	3.86 98	4.75 121	109 49.4
P1792A	2 ⅞ 73			
P1792B	3 76			
P1792C	3 ⅛ 79			
P1793	3 ¼ 83	4.36 111	5.125 130	130 59.0
P1793A	3 ⅝ 86			
P1793B	3 ¾ 89			
P1793C	3 ⅝ 92	4.86 184	5.54 141	160 72.6
P1794	3 ¾ 95			
P1794A	3 ⅞ 98			
P1794B	4 102			
P1794C	4 ⅛ 105	5.24 133	5.92 150	160 72.6
P1795	4 ¼ 108			
P1795A	4 ⅜ 111			
P1795B	4 ½ 114			

P2535 CONDUIT HANGER CONNECTION FOR ½" CONDUIT

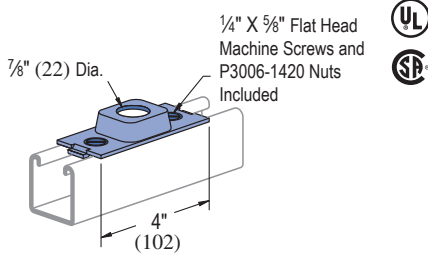


Design Load
400 Lbs (1.78 kN)

Material: 12 gauge (2.7).

Wt/100 pcs: 28 Lbs (12.7 kg)

P2536 CONDUIT HANGER CONNECTION FOR ¾" CONDUIT

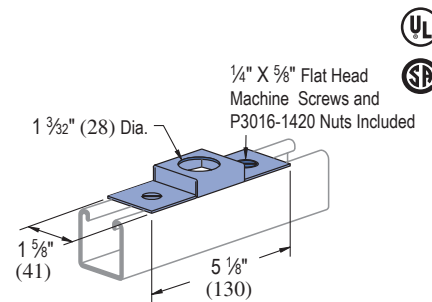


Design Load
200 Lbs (0.89 kN)

Material: 16 gauge (1.5)

Wt/100 pcs: 36 Lbs (16.3 kg)


P2522 OUTLET BOX CONNECTION

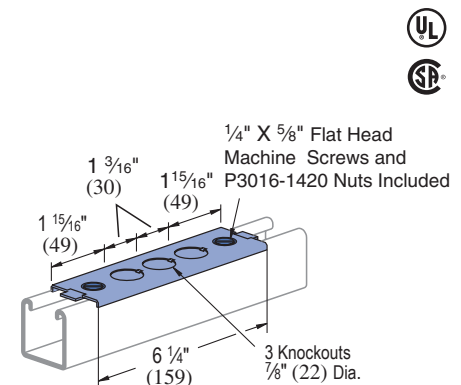

Wt/100 pcs: 35 Lbs (15.9 kg)

P2755, P2756, P2757

RACEWAY HANGERS




Design Load
120 Lbs (0.53 kN)

Part No.	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2755	9/16 14	44 20.0
P2756	7/8 22	44 20.0
P2757	13/32 10.3	44 20.0

Use with Channels:
P1001, P1101, P2001,
P5000, & P5500.
Material: 14 gauge (1.9).

P2855, P2856, P2857

RACEWAY HANGERS




Design Load
120 Lbs (0.53 kN)

Part No.	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2855	9/16 14	32 14.5
P2856	7/8 22	32 14.5
P2857	13/32 10.3	32 14.5

Use with Channels:
P1000, P1100,
P3000, P3300
Material: 14 gauge (1.9).

P2537, P5537

FLUORESCENT FIXTURE HANGERS

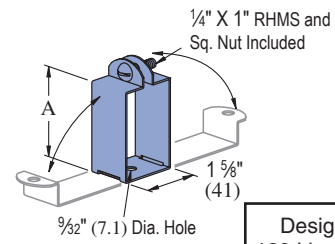



Design Load
120 Lbs (0.53 kN)

• Hanger provides more than 1/2" (12.7) space between channel and fixtures.
Materials: 18 gauge (1.2).

Part No.	Use w/Channel	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2537	P1000	27/16	19
	P1100	61.9	8.6
	P3000		
P5537	P5500	3 1/4	22
		82.6	10.0

P2602

MERCURY VAPOR FIXTURE HANGER

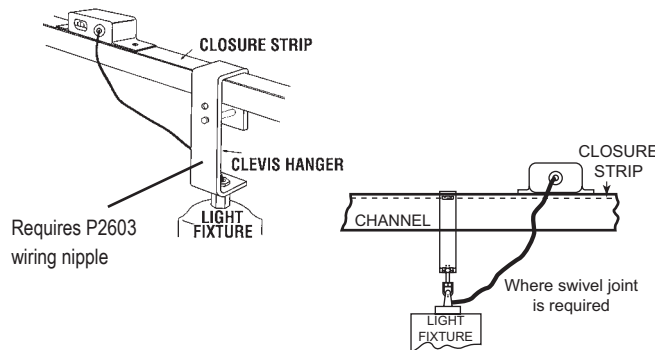


Requires P2603 wiring nipple

Wt/100 pcs: 154 Lbs (69.9 kg)

Use with 1 5/8" Channel
Finish: Electro-galvanized
Stock Size: 1/4"
NOTE: Supports fixture in slot up or down system.

P2539, P3539, P5539

FLUORESCENT FIXTURE HANGERS

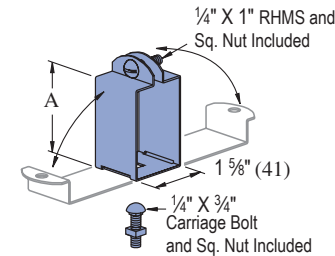


• Hanger provides 1/8" (3.2) space between channel and fixtures.
Materials: 18 gauge (1.2).

Part No.	Use w/Channel	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2539	P1000	1 1/4	17
	P1100	45	7.7
P3539	P3000	1 1/2	15
P5539	P3000	38	6.8
	P5500	2 9/16	18
		65	8.2

P3922 THRU P3926

SPLICE FITTINGS

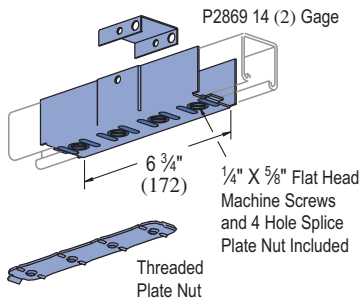


Assy. No.	Use W/ Channel	"A" In (mm)	Clevis No.	Back Clevis No.	Plate Nut No.	Wt/100 pcs Lbs (kg)
P3922	P1000	1 5/8	P2377	P2517	P2869	100
	P1100	41				45.4
P3923	P3000	1 3/8	P3377	P2517	P2869	97
P3924	P4000	13/16	P5377	P2517	P2869	80
		21				36.3
P3925	P5500	1 1/8	P2377	P5517	P2869	103
P3926	P5000	1 5/8	P2377	P5017	P2869	106
		41				48.1

Material: 16 gauge (1.6).

P3521-50

END CONNECTORS FOR 1/2" CONDUIT

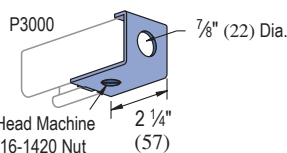

1/4" X 5/8" Flat Head Machine Screw and P3016-1420 Nut Included

Material: 12 gauge (3).


Wt/100 pcs: 27 Lbs (12.2 kg)

P5251-50, P2521-75

END CONNECTORS FOR 1/2" & 3/4" CONDUIT



1/4" X 5/8" Flat Head Machine Screw and P3016-1420 Nut Included



Part No.	Conduit Size In	Wt/100 pcs Lbs (kg)
P2521-50	1/2	27 12.2
P2521-75	3/4	26 11.8


Use with channels:
P1000 and P1100.
Material:
12 gauge (3)

P5521-50, P5521-75

END CONNECTORS FOR 1/2" & 3/4" CONDUIT



1/4" X 5/8" Flat Head Machine Screw and P3016-1420 Nut Included

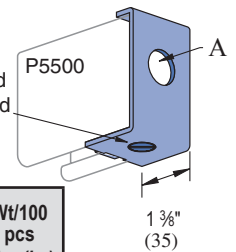


Part No.	Conduit Size In	Wt/100 pcs Lbs (kg)
P5521-50	1/2	27 12.2
P5521-75	3/4	26 11.8

Material:
12 gauge (3).




P5021-50, P5021-75 END CONNECTOR FOR 1/2" & 3/4" CONDUIT

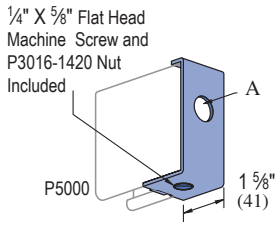

Part No.	Conduit Size A In	Wt/100 pcs Lbs (kg)
P5021-50	1/2	31 14.1
P5021-75	3/4	30 13.6

Material: 12 gauge (2.7).

P2521-100 END CONNECTOR FOR 1" CONDUIT




1/4" X 5/8" Flat Head Machine Screw and P3016-1420 Nut Included

Material: 12 gauge (2.7).

Wt/100 pcs: 24 Lbs (10.9 kg)

P5021-100 END CONNECTOR FOR 1" CONDUIT

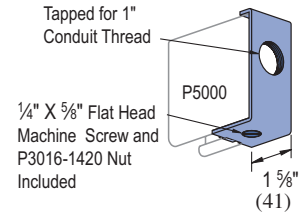


1/4" X 5/8" Flat Head Machine Screw and P3016-1420 Nut Included

Material: 12 gauge (2.7).

Wt/100 pcs: 28 Lbs (12.7 kg)


P5521-100 END CONNECTOR FOR 1" CONDUIT

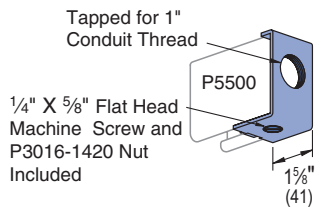

Material: 12 gauge (2.7).

Wt/100 pcs: 24 Lbs (10.9 kg)

P2541




Material: 12 gauge (2.7).

Wt/100 pcs: 24 Lbs (10.9 kg)

SPACER CLEVIS




P1180W THRU P5580 END CAPS



Material: 14 gauge (1.9)

Part Number	Use With	Wt/100 pcs Lbs (kg)
P1180W	P1100	12 (5.4)
P1280W	P1000	11 (5.0)
P2280W	P2000	11 (5.0)
P3280W	P3000	8 (3.6)
P4280W	P4000	5 (2.3)
P5280W	P5000	22 (10.0)
P5580W	P5500	18 (8.2)


P2603 FIXTURE WIRING NIPPLE



Assembly: 1/2" x 2" rigid conduit nipple Bushing Locknut

Wt/100 pcs: 14 Lbs (6.4 kg)

P2540, P2540A



Stamped Ident. No.
P2540 - 121961
P2540A - 121960
Material: Sintered metal.

1/2" American Standard Straight Pipe Thread


Part No.	"A" In (mm)	Wt/100 pcs Lbs (kg)
P2540	1 1/4 29	10.0 4.5
P2540A	5/8 16	8 3.6

Design Load
320 Lbs (1.42 kN)

WIRING STUD NUT





P2802 JUNCTION BOX COVER

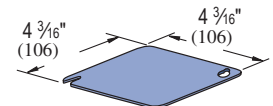

Wt/100 pcs: 30 Lbs (13.6kg)


P2803

Stamp ID No. 122022

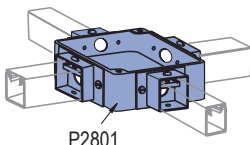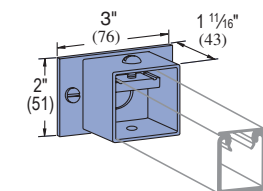

P2801


Wt/100 pcs: 32 Lbs (14.5 kg)

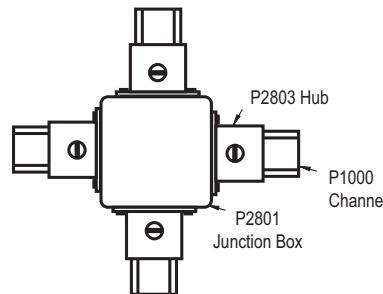

Note: Combine junction box (P2801) and hub assemblies (P2803) to make 1, 2, 3, or 4 way junction box.

P2801


JUNCTION BOX



Wt/100 pcs: 113 Lbs (51.4 kg)



P3116-125
FIXTURE STUD NUT




1/4" x 20 Thd.
1 3/16" (30)

Wt/100 pcs: 11 Lbs (5.0 kg)

P2552

POLYPROPYLENE WIRE RETAINER




1 1/2" (38) 1 1/2" (38)

Retainer may be easily pushed into channel to support wires until closure strip is installed.

Wt/100 pcs: .30 Lbs (.1 kg)



P2904




P3300, P4000, P4100

3/8"-16 x 1/4" Socket Cup Point
Set Screws Included
Extruded Aluminum

Wt/100 pcs: 12 Lbs (5.4kg)


P2900



3/8"-16 x 1/4"
Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 20 Lbs (9.1 kg)


P2901



3/8"-16 x 1/4"
Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 35 Lbs (15.9 kg)


P2902



3/8"-16 x 1/4"
Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 27 Lbs (12.2 kg)

P2903




3/8"-16 x 1/4"
Socket Cup Point
Set Screws Included
Material: Cast aluminum.

Wt/100 pcs: 45 Lbs (20.4 kg)

M2037, M2050

SWIVEL HANGERS

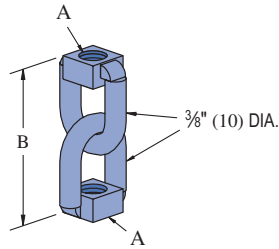


Design Load
600 Lbs (2.67 kN)

Part No.	"A" In	"B" In (mm)	Wt/100 pcs Lbs (kg)
M2037	3/8" - 16	2 31/32 75	23 10.4
M2050	1/2" - 13	2 3/4 70	32 14.5

M2250

SWIVEL HANGER

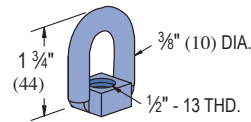


Design Load
600 Lbs (2.67 kN)

Wt/100 pcs: 18 Lbs (8.2 kg)

M2137, M2150

SWIVEL HANGERS

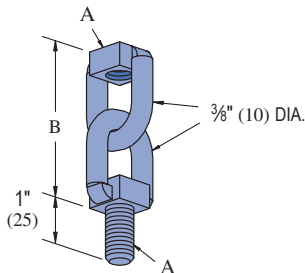


Design Load
600 Lbs (2.67 kN)

Part No.	"A" In	"B" In (mm)	Wt/100 pcs Lbs (kg)
M2137	3/8" - 16	2 29/32 74	27 12.2
M2150	1/2" - 13	2 3/4 70	45 20.4

M2350

SWIVEL HANGER

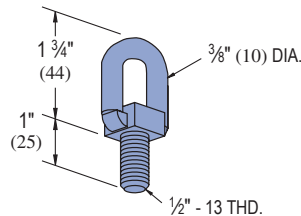


Design Load
600 Lbs (2.67 kN)


Wt/100 pcs: 20 Lbs (9.1 kg)



P16F

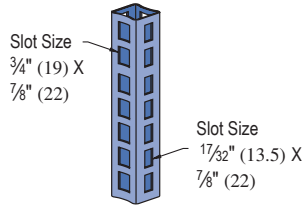


Slot spacing
1 1/4" (31.8)
on center.




Tubing Finishes: PL, GR, HG, PG;
Standard Lengths: 10' & 20'

Wt/100 Ft: 178 Lbs (260 kg/100 m)
Allowable Moment 4,800 In-Lbs (540 N·m)
12 Gauge Nominal Thickness .105" (2.7mm)

P21H

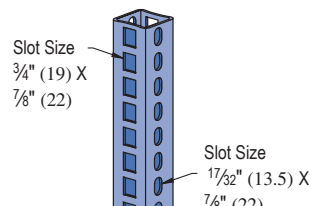

Slot spacing
1 1/4" (31.8)
on center.



Tubing Finishes: PL, GR, HG, PG;
Standard Lengths: 10' & 20'

Wt/100 Ft: 297 Lbs (440 kg/100 m)
Allowable Moment 11,370 In-Lbs (540 N·m)
12 Gauge Nominal Thickness .105" (2.7mm)

P16F - COLUMN LOADING

Unbraced Height In	Max. Allowable Load Column Loaded at C.G. Lbs	Max. Allowable Load Column Loaded at Slot Face Lbs
24	9,600	3,300
36	9,000	3,100
48	8,300	2,900
60	7,500	2,700
72	6,600	2,400
84	5,600	2,200
96	4,500	1,900
108	3,600	1,600
120	2,900	1,400
144	2,000	1,100

P21H - COLUMN LOADING

Unbraced Height In	Max. Allowable Load Column Loaded at C.G. Lbs	Max. Allowable Load Column Loaded at Slot Face Lbs
24	17,700	6,200
36	16,900	6,000
48	16,000	5,700
60	15,000	5,400
72	13,900	5,100
84	12,600	4,700
96	11,300	4,300
108	9,900	3,900
120	8,300	3,500
144	5,800	2,800
168	4,230	2,300

P16F - COLUMN LOADING (METRIC)

Unbraced Height mm	Max. Allowable Load Column Loaded at C.G. kN	Max. Allowable Load Column Loaded at Slot Face kN
610	42.7	14.7
914	40.0	13.8
1,219	36.9	12.9
1,524	33.4	12.0
1,829	29.4	10.7
2,134	24.9	9.8
2,438	20.0	8.5
2,743	16.0	7.1
3,048	12.9	6.2
3,658	8.9	4.9

P21H - COLUMN LOADING (METRIC)

Unbraced Height mm	Max. Allowable Load Column Loaded at C.G. kN	Max. Allowable Load Column Loaded at Slot Face kN
610	78.7	27.6
914	75.2	26.7
1,219	71.2	25.4
1,524	66.7	24.0
1,829	61.8	22.7
2,134	56.0	20.9
2,438	50.3	19.1
2,743	44.0	17.3
3,048	36.9	15.6
3,658	25.8	12.5
4,267	18.8	10.2

1 1/2" Channel
 Telesnut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P16F - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	1,600	0.06	1,600	1,600	1,600
36	1,070	0.13	1,070	1,070	820
48	800	0.23	800	690	460
60	640	0.36	590	440	290
72	530	0.52	410	310	200
84	460	0.71	300	220	150
96	400	0.93	230	170	110
108	360	1.18	180	140	90
120	320	1.45	150	110	70
144	270	2.09	100	80	50
168	230	2.85	70	60	40

P21H - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	3,790	0.05	3,790	3,790	3,790
36	2,530	0.11	2,530	2,530	2,380
48	1,900	0.19	1,900	1,900	1,340
60	1,520	0.29	1,520	1,280	860
72	1,260	0.42	1,190	890	590
84	1,080	0.58	870	660	440
96	950	0.76	670	500	330
108	840	0.96	530	400	260
120	760	1.18	430	320	210
144	630	1.70	300	220	150
168	540	2.31	220	160	110

P16F - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	7.2	1	7.2	7.2	7.2
750	5.8	2	5.8	5.8	5.4
1,000	4.3	4	4.3	4.3	3.0
1,250	3.5	6	3.5	2.9	1.9
1,500	2.9	9	2.7	2.0	1.4
1,750	2.5	12	2.0	1.5	1.0
2,000	2.2	16	1.5	1.1	0.8
2,500	1.7	25	1.0	0.7	0.5
3,000	1.5	36	0.7	0.5	0.3
3,500	1.2	49	0.5	0.4	0.2
4,000	1.1	64	0.4	0.3	0.2

P21H - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	17.1	1	17.1	17.1	17.1
750	13.7	2	13.7	13.7	13.7
1,000	10.3	3	10.3	10.3	8.8
1,250	8.2	5	8.2	8.2	5.7
1,500	6.9	7	6.9	5.9	3.9
1,750	5.9	10	5.8	4.3	2.9
2,000	5.1	13	4.4	3.3	2.2
2,500	4.1	20	2.8	2.1	1.4
3,000	3.4	29	2.0	1.5	1.0
3,500	2.9	40	1.4	1.1	0.7
4,000	2.6	52	1.1	0.8	0.5

Notes:

1. Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
2. Long span beams should be supported in such a manner as to prevent rotation and twist.
3. Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.

P16F - ELEMENTS OF SECTION


Parameter	P16F	P16F (metric)
Area of Section	0.416 In ²	2.68 cm ²
Axis 1-1		
Moment of Inertia (I)	0.168 In ⁴	7.0 cm ⁴
Section Modulus (S)	0.192 In ³	3.1 cm ³
Radius of Gyration (r)	0.650 In	1.7 cm
Axis 2-2		
Moment of Inertia (I)	0.210 In ⁴	8.7 cm ⁴
Section Modulus (S)	0.240 In ³	3.9 cm ³
Radius of Gyration (r)	0.725 In	1.8 cm

P21H - ELEMENTS OF SECTION

Parameter	P21H	P21H (metric)
Area of Section	0.749 In ²	4.83 cm ²
Axis 1-1		
Moment of Inertia (I)	0.490 In ⁴	20.4 cm ⁴
Section Modulus (S)	0.455 In ³	7.5 cm ³
Radius of Gyration (r)	0.820 In	2.1 cm
Axis 2-2		
Moment of Inertia (I)	0.590 In ⁴	24.6 cm ⁴
Section Modulus (S)	0.540 In ³	8.8 cm ³
Radius of Gyration (r)	0.900 In	2.3 cm




P2820, P2940 CHANNEL/TUBE CONNECTORS

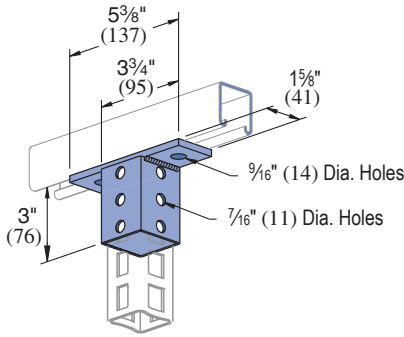

Part No.	Use With	Wt/100 pcs Lbs (kg)
P2820	P16F	116 (2.6)
P2940	P21H	148 (67.1)

P2822, P2932


SPLICE FITTINGS

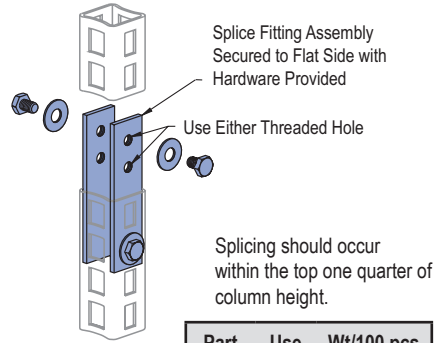

Part No.	Use With	Wt/100 pcs Lbs (kg)
P2822	P16F	97 (44.0)
P2932	P21H	122 (55.3)

P2823


90° RACK FITTING

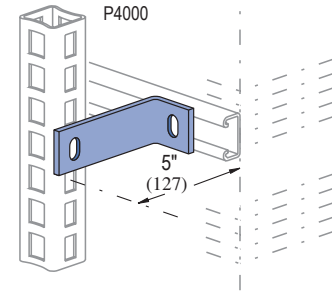

Wt/100 pcs: 66 Lbs (29.9 kg)

P2821

LOCKING CLIP

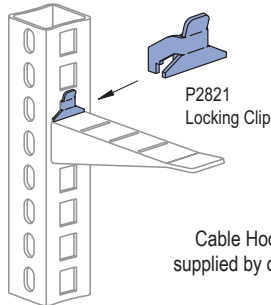


Exclusive Cable Hook
Locking Clip prevents Cable Hook removal.

Wt/100 pcs: 3 Lbs (1.4 kg)

P2928, P2929 AND P2930

CABLE BRACKETS

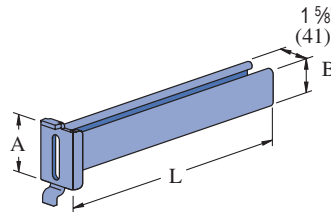

Use with P16F or P21H.


Material: 12 gauge steel.

Part Number	"L" In (mm)	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)	Uniform Design Load Lbs (kN)
P2928	6 152	3 1/2 89	7/8 22	92 41.7	500 2.22
P2929	12 305	3 1/2 89	1 5/8 41	320 145.1	250 1.12
P2930	18 457	3 1/2 89	1 5/8 41	420 190.5	170 0.76

Safety factor of 3.

P2920 THRU P2924

CABLE BRACKETS

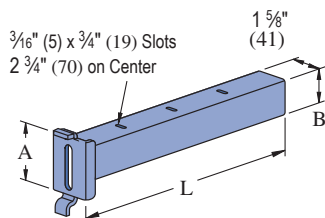

Use with P16F or P21H.

Material: 12 gauge steel.

Part Number	"L" In (mm)	"A" In (mm)	"B" In (mm)	Wt/100 pcs Lbs (kg)	Uniform Design Load Lbs (kN)
P2920	5 1/2 140	3 1/2 89	7/8 22	90 40.8	500 2.22
P2921	8 1/4 210	3 1/2 89	7/8 22	120 54.4	325 1.45
P2922	11 279	3 1/2 89	1 5/8 41	300 136.1	275 1.22
P2923	13 3/4 349	3 1/2 89	1 5/8 41	340 154.2	220 0.98
P2924	19 1/4 489	3 1/2 89	1 5/8 41	430 195.0	160 0.71

Safety factor of 3.

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

U.L. LISTED

Unistrut channel is listed by Underwriters' Laboratories as a surface metal raceway. Snap-in closure strip is used to complete the raceway. Accessory parts listed by Underwriters are noted on drawings. The following tables represent maximum number of conductors when raceway is not employed with fixtures or where the clearance between fixtures and raceway is greater than 1/2" (12.7). In all cases the snap-in cover is required to complete raceway enclosure.

P3300

Gauge	Number and Conductor Size (AWG)				
	14	12	10	8	6
THWN, THHN	40	30	19	9	6
XHHW	26	21	16	7	5
T, TW	26	20	15	7	4
THW	17	14	11	6	4
RH	15	12	7	4	3
RHH, RHW	10	9	7	4	2

P1000, & -KO, P1100 & -KO

Gauge	Number and Conductor Size (AWG)				
	14	12	10	8	6
THWN, THHN	88	66	42	20	14
XHHW	58	46	35	16	12
T, TW	57	44	34	16	9
THW	37	30	24	12	9
RH	33	27	16	9	6
RHH, RHW	23	20	16	9	6

Channel Part Number	Channel Size and Inside Area			
	Size	Area	40% Area	25% Area
P3300 & KO	1 5/8" x 7/8"	0.975 629	0.390 252	0.244 157
P3000 & KO	1 5/8" x 1 3/8"	1.677 1,082	0.671 433	0.419 270
P1000 & KO, P1100 & KO	1 5/8" x 1 5/8"	2.028 1,308	0.811 523	0.507 327
P5500 & KO	1 5/8" x 2 7/16"	3.169 2,045	1.268 818	0.792 511
P5000 & KO	1 5/8" x 3 1/4"	4.308 2,779	1.723 1,112	1.077 695

C.S.A. APPROVED

Suitable for number of wires in Column A when installed to support and supply electric discharge type lighting fixtures when raceway wiring is suitable for at least 75° C except wire suitable for 60° C may be used when clearance between fixtures and raceways is at least 1/2" (12.7). Also suitable for number of wires in column B when

P3000, & -KO

Gauge	Number and Conductor Size (AWG)				
	14	12	10	8	6
THWN, THHN	72	54	34	17	12
XHHW	48	37	29	13	10
T, TW	46	36	28	13	7
THW	30	25	20	10	7
RH	27	22	13	7	5
RHH, RHW	19	16	13	7	5

P5500, & -KO

Gauge	Number and Conductor Size (AWG)				
	14	12	10	8	6
THWN, THHN	141	105	66	33	23
XHHW	93	73	57	27	19
T, TW	91	58	55	26	15
THW	59	49	39	20	15
RH	53	44	26	14	10
RHH, RHW	37	32	26	14	10

P5000, & -KO

Gauge	Number and Conductor Size (AWG)				
	14	12	10	8	6
THWN, THHN	193	105	91	45	32
XHHW	128	101	78	37	27
T, TW	125	98	75	35	20
THW	81	67	54	28	20
RH	73	60	36	19	13
RHH, RHW	51	44	36	19	13

Note:

Raceways with external joiners shall use a 40% wire fill calculation to determine the number of conductors permitted.

Raceways with internal joiners shall use a 25% wire fill calculation to determine the number of conductors permitted

Also UL Listed

P1001, P1101, P3001, P3301, P5001 & P5501

installed to support electric discharge type lighting fixtures when raceway wiring is suitable for at least 75° C and clearance between fixtures and raceway is at least 1/2" (3.2).

Maximum number of wires for types T, THN, THW, THWN, TW, R, RH, RHH, RHW or XHHW

Raceway Wire Size AWG	P1000, & -KO P1100, & -KO		P3000, & -KO		P3300		P5000 & -KO		P5500, & -KO	
	A	B	A	B	A	B	A	B	A	B
	14	6	10	5	10	4	6	10	10	10
12	6	10	4	10	3	6	10	10	10	10
10	5	8	4	6	-	-	8	10	8	10
8	4	6	3	4	-	-	6	9	6	8
6	2	3	2	2	-	-	4	6	4	6


Unistrut channels are also certified by Canadian Standards Association.



FLUORESCENT FIXTURES - SUPPORT APPLICATIONS


Spring-Nut attachment system

Conduit connects through knockout in fixture. Fixture is supported by P1006-1420 spring nut and 1/4" round head machine screw. Assembly is supported by P2855 hinged hanger.

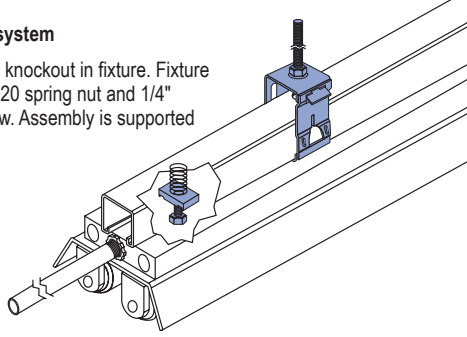

Slotted channel attachment system

Conduit connects through knockout in fixture. Fixture is supported by HCSS series hex bolt and hex nut. Raceway is supported by P2855 hanger. To splice a continuous run, use P3922.

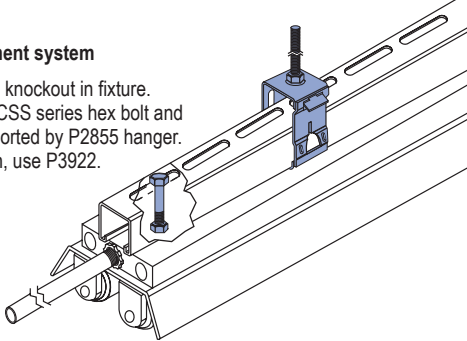

RECOMMENDED SUPPORT SPACING FOR FIXTURES

Deflections are based on continuity of span and use of 4 ft. fixtures weighing approximately 30 lbs. each. Do not use joiner fittings between supporting hangers. When using knock-out or slotted channels deflections will be increased approximately 5%. With fixtures spaced 2' - 0" apart, deflection is 60-70% of table. When spaced 4' - 0" apart, deflection is 50-60% of table.


Deflection Table

Channel	Distance Between Supports - In (mm)								
	8' (2.4m)	10' (3m)	12' (3.7m)	14' (4.3m)	16' (4.9m)	18' (5.5m)	20' (6.1m)	22' (6.7m)	24' (7.3m)
P3300	0.187 4.7	-	-	-	-	-	-	-	-
P3000	0.100 2.5	0.250 6.4	0.500 12.7	-	-	-	-	-	-
P1100	0.088 2.2	0.250 6.4	0.437 11.1	0.875 22.2	-	-	-	-	-
P1000	-	0.180 4.6	0.312 7.9	0.625 15.9	1.000 25.4	1.625 41.3	-	-	-
P5500	-	-	-	0.250 6.4	0.500 12.7	0.812 20.6	1.620 41.1	-	-
P5000	-	-	-	-	0.310 7.9	0.625 15.9	1.000 25.4	1.800 45.7	2.500 63.5
P1001	-	-	-	-	0.310 7.9	0.625 15.9	1.000 25.4	1.800 45.7	2.500 63.5
P5001	-	-	-	-	-	0.200 5.1	0.250 6.4	0.400 10.2	0.500 12.7

HIGH-BAY FIXTURE RACEWAY APPLICATIONS


H.I.D. Knockout mounted system

Fixture attached to and wired from raceway by 1/2" nipple assembly of desired length at channel knockout. P1280W end cap, P3184 closure strip, P2535 conduit connector, and P2855 channel hanger complete assembly. For splicing channels into continuous raceway runs, use joiner fitting P3922.

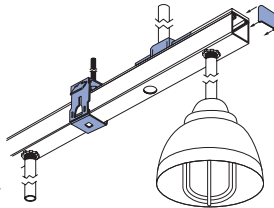


High-Bay dual mounted system

Fixtures are connected to and wired from raceway by conduit connector fitting P2536. Raceway is supported by P2855 hanger. P1280W end caps and P3184 closure strip complete the assembly. Conduit connected to raceway through channel knockout.

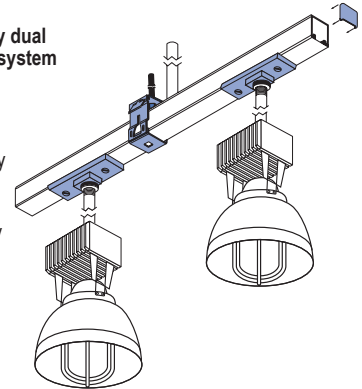


H.I.D. Plug-in system (with swivel)

Fixtures, supported by P2855 hangers and M2250 eyelets, plug into receptacle mounted in P2763 outlet box. P2855 hangers also support raceway. P2521-75 end connector joins conduit to raceway. P1280W end caps (not shown) and P3184 closure strip complete assembly.

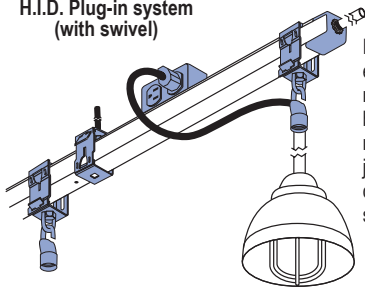


H.I.D. Plug-in system (rigid mount)

Fixtures are supported by P2602 clevis hangers. Cover plate on P2761 outlet box provides access to receptacle box. Raceway is supported and wired by top mounted P2535 conduit connectors. P1280W end caps and P3184 closure strip complete assembly.

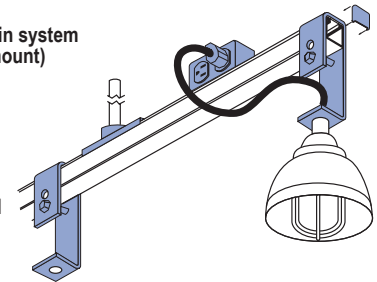

Uplighting with underhung or remote ballast

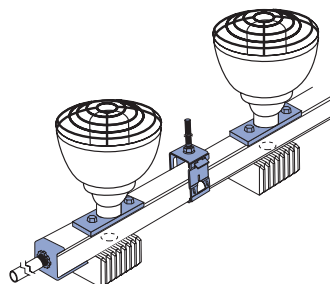

Fixtures attached to and wired from P2535 conduit fittings mounted to slot side of channel. Raceway can be wired by P2521 as shown or, conduit can enter through available knockout. Ballasts in P2521 are connected at the knockout by fixture adapter. In remote ballast installations, follow manufacturers instructions. P2855 hinged hangers support both types of installations. P3184 closure strip and P1280W end caps complete assembly. For continuous raceways, use joiner fitting P3922. P2521-75 end connector joins conduit to raceway.

1 5/8" Channel

Telesrnut System

Nuts & Hardware

General Fittings

Pipe/Conduit Supports

Electrical Fittings

Concrete Inserts

1 1/4" Framing System




1 3/16" Framing System

Fiberglass System

Special Metals

PrimeAngle System

Product Index

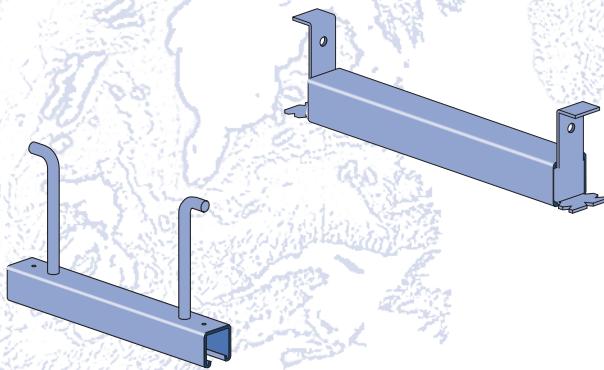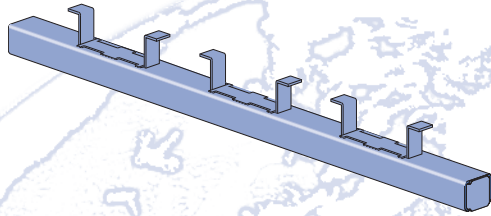

Heavy-Duty Inserts	134-135
Standard-Duty Inserts.....	136, 138
Light-Duty Inserts	137
Spot Inserts	138
Deck Inserts	139
Components	139
Technical Data	140

MATERIAL

Cold-formed inserts are manufactured from standard 12 gauge (2.7 mm) Unistrut channel sections conforming to ASTM A1011 SS GR 33 or ASTM A653 GR 33, unless otherwise noted.

Hot-rolled inserts, as noted, are manufactured from carbon steel meeting physical requirements of ASTM A283 GR D.

To inhibit concrete seepage, all inserts (except spot inserts) are provided with closure strips and end caps or foam filler, unless otherwise requested.

Most concrete inserts are available in stainless steel on special order. Consult factory for ordering information.

APPLICATION

A wide range of heavy-duty to light-duty "continuous" and "spot" concrete inserts are available for use in pre-cast, pre-stressed or poured-in-place concrete floors, walls or ceilings.

FINISHES

Cold-formed, standard-duty, light-duty and spot concrete inserts are available in:

Perma-Green III (GR),

Hot dipped galvanized (HG), conforming to ASTM A123 or A153;

Pre-galvanized (PG), conforming to ASTM A653 GR 33

Plain (PL).

DESIGN LOAD

Design loads, where shown, are based on 3,000 PSI concrete, unless noted.

STANDARD LENGTHS

Insert lengths range from 3 inches (76 mm) to 20 feet (6.10m) with a tolerance of $\pm 1/4$ -inch (6.4mm).

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parentheses or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.


Custom-designed inserts are available on special order. Consult factory for ordering information.




Heavy Duty

Light Duty


Standard Duty




P3754-Pg 135




P3349-Pg 137




P3352-Pg 137




9P3354-Pg 137




P3249-Pg 136



P3253-Pg 136



P3254-Pg 136



P3165-Pg 138



P2865-Pg 138

Spot Inserts and Components



P3245-Pg 138




P3245N4-Pg 138




M24-Pg 138



M2506-Pg 138




P3700-Pg 139



P1703-Pg 139




P2407-Pg 139




P3663-Pg 139

Fiberglass Concrete Inserts


Closure Strips



Heavy Duty-Pg 169



Standard Duty-Pg 171



Light Duty-Pg 170



P1184
Pg 54



P1184P
Pg 54



P3184
Pg 54



P3184P
Pg 54



P3184F
Pg 54



P3712P
Pg 54

Channel Nuts



Heavy Duty-Pg 67



Heavy Duty-Pg 67



Standard Duty-Pg 67



Standard Duty-Pg 67




Light Duty-Pg 67



Light Duty-Pg 67


INSTALLING CONCRETE INSERTS

1. Nail insert to concrete form using prepunched nail holes
2. Attach rebars to flanges on insert

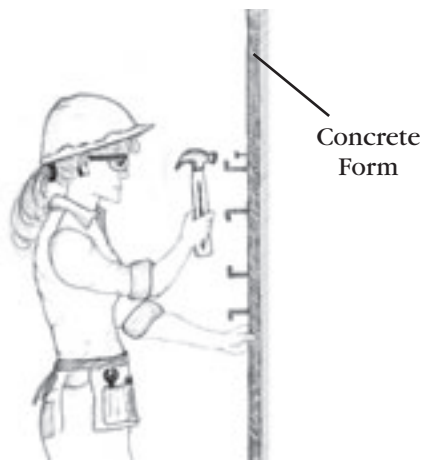


The Unistrut concrete insert is firmly fixed to the concrete side of the form before pouring. When the forms are removed, the insert is ready for use. Brackets and other components can be attached at any point of the continuous entry channel.


USING INSTALLED CONCRETE INSERT

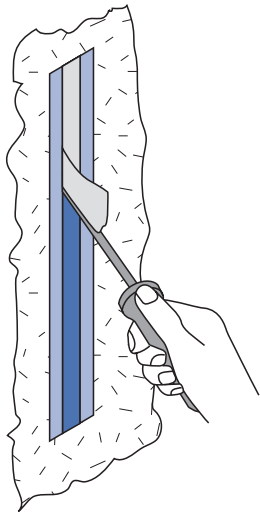

1. Scrape out filler

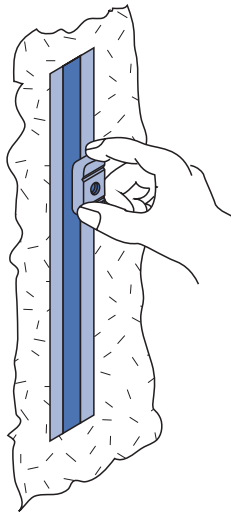

2. Insert channel nut.




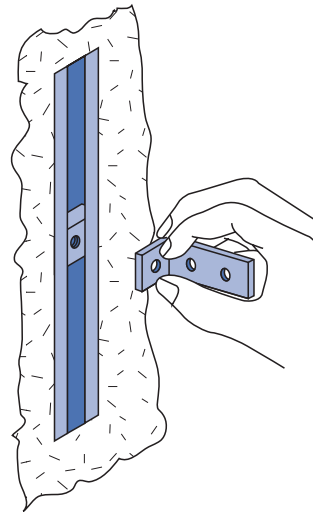


3. Attach fitting

P3754 SERIES

1 5/8" x 1 5/8" CHANNEL

- Closure strip P3712 P and a styrene bead end cap that fits inside the channel to inhibit concrete seepage are included.
- The recommended design load when used for curtain wall anchorage is 5,000 pounds and is based on use in average, good concrete. The design load includes 1/3 increase in load as permitted by AISI Specifications and Uniform Building Code when stresses are produced by wind or earthquake and other loads.
- The recommended design load is based on using two P1010 nuts at no less than 3" O.C. and no closer than 2" to either end of the insert. The distance between the insert centerline and the concrete edge must be a minimum of 3".
- All nuts and fittings for P3200 series concrete inserts will fit.
- Material: Cold formed from 12 Ga. (2.7mm) steel conforming to ASTM A1011 SS GR 33 or ASTM A653 GR 33 A. Stainless steel available on special order.
- Finish: Choice of Perma-Green II (GR), hot-dipped galvanized (HG) conforming to ASTM A123 or A153, pre-galvanized (PG) conforming to ASTM A653-G90, or plain (PL).

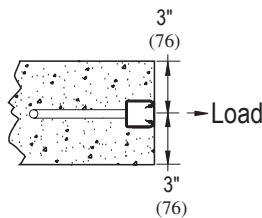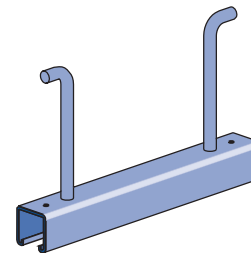

Part Number	Insert Length ±1/4" (6.4mm) In (mm)	Wt/100 pcs Lbs (kg)	Max. Anchor Spacing In (mm)	Max. Allowable Point Load Lbs (kN)	Spacing of Point Loads In (mm)	Max. Allowable Uniform Load Lbs (kN)
P3754	12 305	210 95.3	8 203	2,500 11.12	3 76	5,000 22.24


Safety factor 3



P3200 SERIES

1 5/8" x 1 3/8" CHANNEL


P3249 thru P3252



"NC" Suffix – No Closure Strip, With End Caps

"WC" Suffix – With Closure Strip & End Caps


P3253



"NC" Suffix – No Closure Strip, With End Caps & Back Plates

"WC" Suffix – With Closure Strip, End Caps & Back Plates



P3254 thru P3270

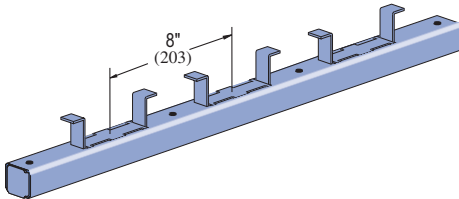

"NC" Suffix – No Closure Strip, W/End Caps & Back Plates

"WC" Suffix – W/Closure Strip, End Caps & Back Plates

"X" – No Closure Strip, No End Caps, W/Back Plates

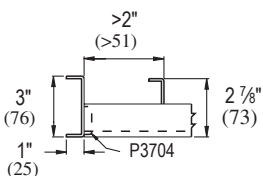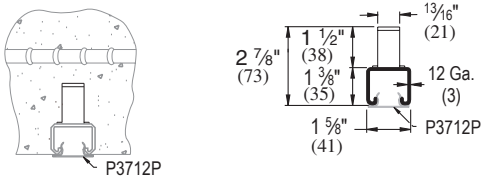

- Includes closure and end caps unless otherwise requested.
- P3280 end cap used when distance to first anchor is up to 2" (51 mm).
- P3704 end cap is used when end distance to first anchor is over 2" (51 mm).
- Nail or anchor inserts to forms every 16" (406 mm) to 24" (610 mm).
- Anchors are 8" (203 mm) on center.
- Material: Cold formed from 12 Ga. (3) steel conforming to ASTM A1011 SS GR 33 or ASTM A653 GR 33. A. Stainless steel available on special order.
- Finish: Choice of Perma-Green III (GR), hot-dipped galvanized (HG) conforming to ASTM A123 or A153, pre-galvanized (PG) conforming to ASTM A653-G90, or plain (PL).

Part Number	Insert Length In/Ft (mm)	Wt/100 pcs Lbs (kg)	Max. Allowable Point Load Lbs (kN)	Min. Spacing of Pt. Loads In (mm)	Max. Allowable Uniform Load Lbs (kN)
P3249	3" 76	85 39	500 2.2	—	500 2.22
P3250	4" 102	100 45	800 3.6	—	800 3.56
P3251	6" 152	130 59	1,000 4.5	—	1,000 4.45
P3252	8" 203	159 72	1,200 5.3	—	1,200 5.34
P3253	12" 305	227 103	2,000 8.9	—	2,000 8.90
P3254	16" 406	270 123	2,000 8.9	12 305	4,000 17.79
P3255	20" 508	357 162	2,000 8.9	12 305	4,000 17.79
P3256	24" 610	399 181	2,000 8.9	12 305	4,000 17.79
P3257	32" 813	527 239	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3257A	36" 914	616 279	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3258	40" 1,016	661 300	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3259	4' 1,219	786 357	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3260	5' 1,524	1,003 455	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3261	6' 1,829	1,173 532	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3262	7' 2,134	1,390 631	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3263	8' 2,438	1,560 708	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3264	9' 2,743	1,741 790	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3265	10' 3,048	1,947 883	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3266	12' 3,658	2,334 1,059	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3267	14' 4,267	2,717 1,232	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3268	16' 4,877	3,116 1,413	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3269	18' 5,486	3,530 1,601	2,000 8.9	12 305	2,000 2,976.3 (kg/m)
P3270	20' 6,096	3,882 1,761	2,000 8.9	12 305	2,000 2,976.3 (kg/m)

Safety factor 3.

1 5/8" Channel
 Teleslur System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/8" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index


P3300 SERIES

1 5/8" x 7/8" CHANNEL

P3349 thru P3351




(When used for sprinkler systems only.)




"NC" Suffix – No Closure Strip, With End Caps
 "WC" Suffix – With Closure Strip & End Caps

P3352 thru P3353







"NC" Suffix – No Closure Strip, With End Caps & Back Plates
 "WC" Suffix – With Closure Strip, End Caps & Back Plates

P3354 thru P3370

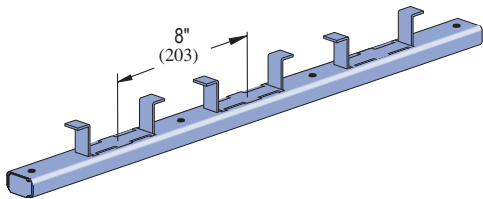

"NC" Suffix – No Closure Strip, W/End Caps & Back Plates
 "WC" Suffix – W/Closure Strip, End Caps & Back Plates
 "X" – No Closure Strip, No End Caps, W/Back Plates

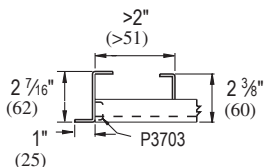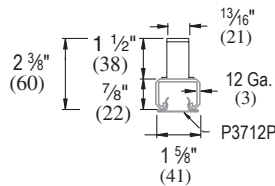

- Includes closure and end caps unless otherwise requested.
- P3380 end cap used when distance to first anchor is up to 2" (51 mm).
- P3703 end cap is used when end distance to first anchor is over 2" (51 mm).
- Nail or anchor inserts to forms every 16" (406 mm) to 24" (610 mm).
- Anchors are 8" (203 mm) on center.
- Material: Cold formed from 12 Ga. (3 mm) steel conforming to ASTM A1011 SS GR. 33 or A653 GR 33. A. Stainless steel available on special order.
- Finish: Choice of Perma-Green III (GR), hot-dipped galvanized (HG) conforming to ASTM A123 or A153, pre-galvanized (PG) conforming to ASTM A653-G90, or plain (PL).




Part Number	Insert Length In/Ft. (mm)	Wt/100 pcs Lbs (kg)	Max. Allowable Point Load Lbs (kN)	Min. Spacing of Pt. Loads In (mm)	Max. Allowable Uniform Load Lbs (kN)
P3349	3" 76	68 31	400 1.8	—	400 1.78
P3350	4" 102	81 37	500 2.2	—	500 2.22
P3351	6" 152	102 46	750 3.3	—	750 3.34
P3352	8" 203	122 55	1,000 4.5	—	1,000 4.45
P3353	12" 305	174 79	1,500 6.7	—	1,500 6.67
P3354	16" 406	185.0 84	1,500 6.7	12 305	3,000 13.34
P3355	20" 508	231 105	1,500 6.7	12 305	3,000 13.34
P3356	24" 610	277 126	1,500 6.7	12 305	3,000 13.34
P3357	32" 813	370 168	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3357A	36" 914	416 189	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3358	40" 1,016	463 210	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3359	4' 1,219	555 252	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3360	5' 1,524	694 315	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3361	6' 1,829	832 377	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3362	7' 2,134	971 440	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3363	8' 2,438	1,110 504	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3364	9' 2,743	1,249 567	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3365	10' 3,048	1,387 629	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3366	12' 3,658	1,665.0 755	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3367	14' 4,267	1,942 881	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3368	16' 4,877	2,220 1,007	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3369	18' 5,486	2,497 1,133	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)
P3370	20' 6,096	2,775 1,259	1,500 6.7	12 305	1,500 Lbs./Ft. 2,232.2 (kg/m)

Safety factor 3.



P3165 SERIES

1 5/8" x 7/8" CHANNEL

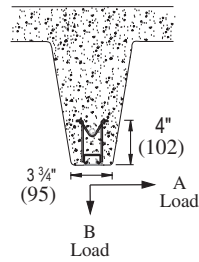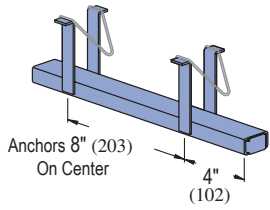

"X" Suffix – No Closure Strip, No End Caps
 "WC" Suffix – With Closure Strip & End Caps

Part No.	Length Ft (M)	Wt/100 pcs Lbs (kg)
P3165	10 3.05	1,650 748.4
P3170	20 6.10	3,280 1,487.8

Maximum allowable load/ft.



Concrete	A Lbs (kN)	B Lbs (kN)
Light Wt	425 1.9	800 3.6
Normal Wt	500 2.2	1,000 4.5

Safety factor 3.

Safety factor 3.

- Designed for use in prestressed concrete.
- Anchors 8" (203 mm) on center; first anchor 4" (102 mm) from end.
- Includes closure and end caps unless otherwise requested.
- Material: Cold formed from 12 Ga. (2.7 mm) steel conforming to ASTM A1011 SS GR 33 or ASTM A653 GR 33. A. Stainless steel available on special order.
- Finish: Choice of Perma-Green II (GR), hot-dipped galvanized (HG) conforming to ASTM A123 or A153, pre-galvanized (PG) conforming to ASTM A653-G90, or plain (PL).

P3245

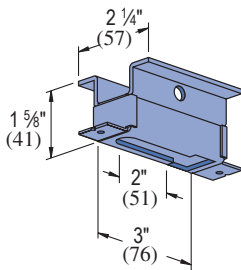

Square Nut for P3245 Insert

Part Number	Wt/100 pcs Lbs (kg)	Max. Allowable Pt. Load Lbs (kN)
P3245	54 24.5	1,000 4.45

Part Number	Size/Thread In	T In (mm)	Wt/100 pcs Lbs (kg)
P3245-N4	1/4" — 20	5/16" — 8	6 2.7
P3245-N6	3/8" — 16	5/16" — 8	5 2.3
HSQN050	1/2" — 13	7/16" — 11	6 2.7


Finish: Pre-galvanized

Safety factor of 3

- For 1/4", 3/8", or 1/2" size attachment or hanger rod.
- Insert nuts to be ordered separately.

P2865-10, -15, -20

HOLD-DOWN SPRINGS


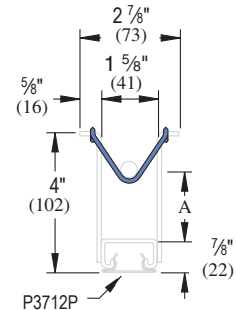


Finish: Plain

Part Number	A In (mm)	Wt/100 pcs Lbs (kg)
P2865-10	1 25	2 0.9
P2865-15	1 1/2 38	2 0.9
P2865-20	2 51	2 0.9

M24

SPOT INSERT



Square Nut for M24

Part Number	Wt/100 pcs Lbs (kg)	Max. Allowable Pt. Load Lbs (kN)
M24	52 23.6	800 3.56

Part Number	Size/Thread In	T In (mm)	Wt/100 pcs Lbs (kg)
M2506	1/4" — 20	1/4" — 6	13 5.9
M2508	3/8" — 16	3/8" — 9	14 6.4
M2510	1/2" — 13	1/2" — 13	14 6.4
M2512	5/8" — 11	1/2" — 13	12 5.4
M2523	3/4" — 10	1/2" — 13	11 5.0
M2524	7/8" — 9	1/2" — 13	10 4.5

Finish: Electro-galvanized



Safety factor of 5

- Ribs along sides of slot give extra strength to case.
- Insert nuts M2506 thru M2524 to be ordered separately.

1 5/8" Channel
 Telesruct System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P3700 SERIES

DECK INSERT

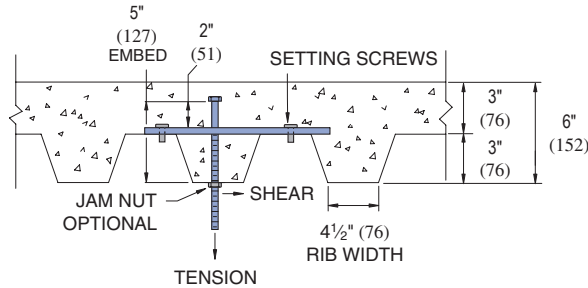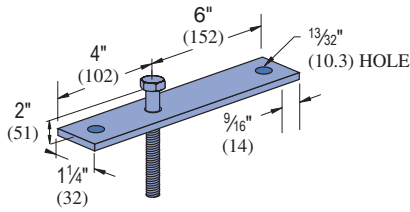



Part Number	Rod Dia. In	Tension Load Lbs (kN)	Shear Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P3700-37	3/8	850 3.8	600 2.7	89 40.4
P3700-50	1/2	1380 6.1	1000 4.5	111 50.3
P3700-62	5/8	1920 8.5	1760 7.8	141 64.0

Notes:

1. Allowable loads have been determined by the manufacturer's testing, analysis, and technical specification.
2. Values are based on a safety factor of 5.
3. 20 Gauge Metal Deck

P1703, P1704, P3704, P3703

END CAP ANCHORS

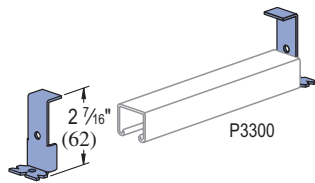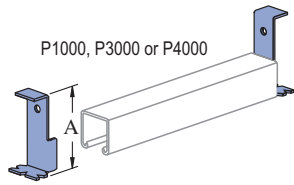


Part Number	Channel	"A" In (mm)	Wt/100 pcs Lbs (kg)
P1703	P1000	2 13/32 61	30 13.6
P1704	P1000	3 17/32 90	37 16.8
P3703	P3300	2 7/16 62	17 7.7
P3704	P3000	3 76	20 9.1
P4703	P4000	2 3/8 60	27 12.2

Note: End cap anchor for use with 1 5/8" wide standard Unistrut inserts only.

P2407, P3280, P3380


END CAPS



Part Number	Fits Channel	Wt/100 pcs Lbs (kg)
P2407	P1000	10 4.5
P3280	P3000	8 3.6
P3380	P3300	5 2.3

P3663, P4663

JOINT COVERS

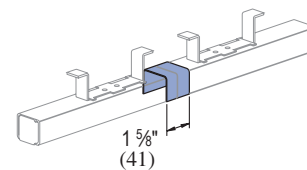

Part Number	Use With Insert Series	Wt/100 pcs Lbs (kg)
P3663	P3270	10 4.5
P4663	P3370	6 2.7

NOTE: Joint cover for use with 1 5/8" wide standard Unistrut inserts only.

Note

When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping.

1 5/8" Channel
Telestrut System
Nuts & Hardware
General Fittings
Pipe/Conduit Supports
Electrical Fittings
Concrete Inserts
1 1/2" Framing System
1 3/4" Framing System
Fiberglass System
Special Metals
PrimeAngle System
Product Index




LOAD CHART BY LENGTH

Part Number	Insert Length In (mm)	Wt/100 ft Lbs (kg)	Anchor Spacing In (mm)	Max. Allowable Point Load Lbs (kN)	Min. Spacing Between Pt. Loads In (mm)	Max. Allowable Uniform Load Lbs (kN)
P3249	3	85	3	500	-	500
		38.6	76	2.22	-	2.22
P3349	76	68	3	400	-	400
		30.8	76	1.78	-	1.78
P3250	4	100	4	800	-	800
		45.4	102	3.56	-	3.56
P3350	102	81	4	500	-	500
		36.7	102	2.22	-	2.22
P3251	6	130	6	1,000	-	1,000
		59.0	152	4.45	-	4.45
P3351	152	102	6	750	-	750
		46.3	152	3.34	-	3.34
P3252	8	159	8	1,200	-	1,200
		72.1	203	5.34	-	5.34
P3352	203	122	8	1,000	-	1,000
		55.3	203	4.45	-	4.45
P3754	12	210	8	2,500	3	5,000
		95.3	203	11.12	76	22.24
P3253	305	227	4	2,000	-	2,000
		103.0	102	8.90	-	8.90
P3353	406	174	4	1,500	-	1,500
		78.9	102	6.67	-	6.67
P3254	16	270	4	2,000	12	4,000
		122.5	102	8.90	305	17.79
P3354	406	185	4	1,500	12	3,000
		83.9	102	6.67	305	13.3
P3255	20	357	4	2,000	12	4,000
		161.9	102	8.90	305	17.79
P3355	508	231	4	1,500	12	3,000
		104.8	102	6.67	305	13.34
P3256	24	399	4	2,000	12	4,000
		181.0	102	8.90	305	17.79
P3356	610	277	4	1,500	12	3,000
		125.6	102	6.67	305	13.34

SPOT INSERT LOAD CHART


Part Number	Wt/100 pcs Lbs (kg)	Anchor Spacing In (mm)	Max. Allowable Point Load Lbs (kN)	Min. Spacing Between Pt. Loads In (mm)	Max. Allowable Uniform Load Lbs/Ft (kg/m)
M26/M2812	54 24.5	-	1,500 6.67	-	1,500 680.4
M3245	52 23.6	-	1,000 4.45	-	1,000 453.6
M24/M2512	52 23.6	-	800 3.56	-	800 362.9

MAXIMUM ALLOWABLE POINT LOAD




The maximum allowable point load may be placed anywhere along the insert. All loads placed less than 2" from the end of an insert must be reduced by 50%.

MAXIMUM ALLOWABLE UNIFORM LOAD

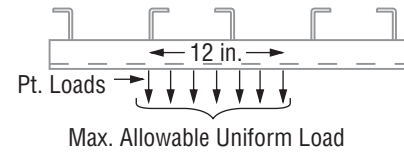

The maximum allowable uniform load must be placed as a series of point loads.

SPACING OF MULTIPLE POINT LOADS

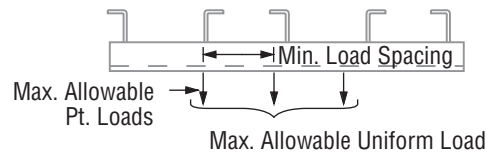

CONTINUOUS CONCRETE INSERT LOAD CHART


Up to 20 Ft. (6.10m)

Part Number	Wt/100 ft Lbs (kg)	Anchor Spacing In (mm)	Max. Allowable Point Load Lbs (kN)	Min. Spacing Between Pt. Loads In (mm)	Max. Allowable Uniform Load Lbs/Ft (kg/m)
P3270	194 88.0	4 102	2,000 8.90	12 305	2,000 2,976.3
P3370	139 63.0	4 102	1,500 6.67	12 305	1,500 2,232.2
P3170*	165 74.8	8 203	1,000 4.45	12 305	1,000 1,488.2

*When used in prestressed concrete "T" Beam.
Load data is based on use of 3000 PSI concrete.


PULL-OUT LOAD

Minimum Edge Distance to Achieve Rated Pull-Out Capacity

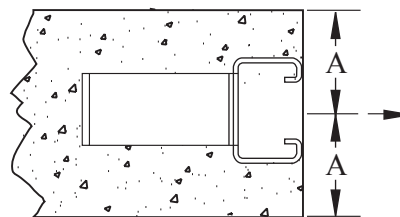



1 1/4" FRAMING SYSTEM

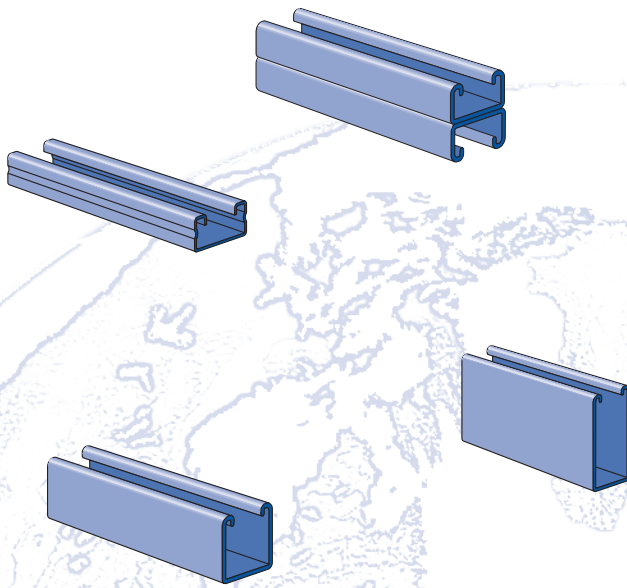

A1000 (14 Gauge)	143-144
A3300 (14 Gauge)	145-146
A4000 (19 Gauge)	147-148
A5000 (14 Gauge)	149
Channel Nuts and Closure Strips	150-151
Flat Plate Fittings	151
Ninety Degree Fittings.....	151-152
"Z" Shape Fittings	152
Angle and Wing Shape Fittings	153
"U" Shape Fittings	153
Tubing Clips	154
Brackets	154

MATERIAL

Unistrut channels are accurately and carefully cold formed to size from low-carbon strip steel.

STEEL: PLAIN

- 14 Gauge (1.9 mm), ASTM A1011 SS GR 33
- 19 Gauge (1.0 mm) ASTM A1008

STEEL: PRE-GALVANIZED

- 14 Gauge (1.9 mm) ASTM A653 GR 33,
- 19 Gauge (1.0 mm) ASTM A653 GR 33

Channel nuts are manufactured from mild steel bars conforming to ASTM A576, GR 1015, and are case hardened.

Fittings are made from hot rolled, pickled and oiled steel plate or strip and conform to ASTM A1011 SS GR 33.

Many framing channels are available in special metal on request. Consult factory for ordering information.

FINISHES

All channels and fittings are available in: Perma-Green III (GR), Pre-galvanized (PG), conforming to ASTM A653 GR 33 and plain (PL).

Nuts are available in plain or electro-galvanized (EG) finish.

Fittings are available in Perma-Green III (GR) or plain (PL).

STANDARD LENGTHS

Standard lengths are 10 feet (3.05M) and 20 feet (6.10M). Tolerances are: +1/8" (3.2 mm) to +1/2" (12.7 mm) to allow for cutting. Special lengths are available for a small cutting charge with a tolerance of ±1/8" (3.2mm).

APPLICATION

A framing system designed for medium loads, the 1 1/4" series is especially suitable for use in the OEM, commercial and display markets. It maintains a lightness in scale and a clean line that makes it aesthetically pleasing as well as functional.

THREADS

All threads on the nuts and bolts are Unified and American coarse screw threads.

DESIGN BOLT TORQUE

BOLT SIZE	1/4"-20	5/16"-18	3/8"-16
Rec. Torque	6	11	19
Ft/Lbs (N•m)	(8)	(15)	(26)
Max Torque	7	15	25
Ft/Lbs (N•m)	(9)	(20)	(34)


DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

LOAD DATA








All beam and column load data pertains to carbon steel and stainless steel channels. Load tables and charts are constructed to be in accordance with the SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS 2001 EDITION published by the AMERICAN IRON AND STEEL INSTITUTE USING ASD METHOD.







Type of Load	Safety Factor to Yield Strength	Safety Factor to Ultimate Strength
Beam Loads	1.67	2.0
Column Load	1.80	2.2














1 5/8" Channel
 Teleslur System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index










<p>A1000 Series</p> <p>1 1/4" x 1 1/4" 14 Ga.</p>  <p>A1000-Pg 143</p>  <p>A1001-Pg 143</p>  <p>A1001 A-Pg 144</p>  <p>A1001 B-Pg 144</p>  <p>A1001 C-Pg 144</p>	<p>A3300 Series</p> <p>1 1/4" x 3/4" 14 Ga.</p>  <p>A3300-Pg 145</p>  <p>A3301-Pg 145</p>
---	--










<p>A4000 Series</p> <p>1 1/4" x 5/8" 19 Ga.</p>  <p>A4000-Pg 147</p>  <p>A4001-Pg 147</p>	<p>A5000 Series</p> <p>1 1/4" x 2 1/2" 14 Ga.</p>  <p>A5000-Pg 149</p>	<p>Channel Nuts & Closures</p>  <p>A1006-1420-Pg 150</p>  <p>A4006-1420-Pg 150</p>  <p>A5506-1420-Pg 150</p>
--	--	--










 A3006-1420-Pg 150	 A3016-0832-Pg 150	 A1280-Pg 151	 A4280-Pg 151	 A5280-Pg 151	 A1184-Pg 151	 A1184P-Pg 151
--	--	---	---	--	---	--










A Series Fittings

 A1063-Pg 151	 A1065-Pg 151	 A1191-Pg Pg 151	 A1066-Pg 151	 A2324-Pg 151	 A1036-Pg 151	 A1031-Pg 151	 A1026-Pg 151	 A1068-Pg 151
---	---	--	---	---	---	---	---	---


 A1326-Pg 151	 A1458-Pg 151	 A1325-Pg 152	 A1033-Pg 152	 A1037-Pg 152	 A1038-Pg 152	 A1357-Pg 152	 A1331-Pg 152	 A1332-Pg 152
---	---	---	---	---	---	---	---	---

 A1579-Pg 152	 A2235-Pg 152	 A2120-Pg 152	 A4120-Pg 152	 A5120-Pg 152	 A1045-Pg 152	 A3345-Pg 152	 A4045-Pg 152	 A5045-Pg 152
---	---	---	---	---	---	---	---	---

 A2109-Pg 153	 A2125-Pg 153	 A2084-Pg 153	 A2341 R-L-Pg 153	 A2472 R-L-Pg 153	 A2223-Pg 153	 A2345-Pg 153	 A2227-Pg 153	 A1047-Pg 153
---	---	---	---	---	---	---	---	---


 A3347-Pg 153	 A4047-Pg 153	 A5047-Pg 153	 A5043-Pg 153	 A2608-Pg 154	 A2491 R-Pg 154	 A2491 L-Pg 154	 A2494 R-Pg 154	 A2494 L-Pg 154
---	---	---	---	---	---	--	---	---

A1000 – 1 1/4" x 1 1/4"

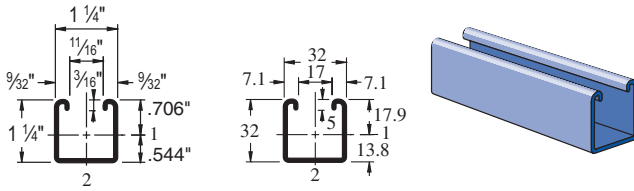

Wt/100 Ft: 104 Lbs(154 kg/100m)
 Allowable Moment 2,170 In-Lbs (240 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

A1001 – 1 1/4" x 2 1/2"

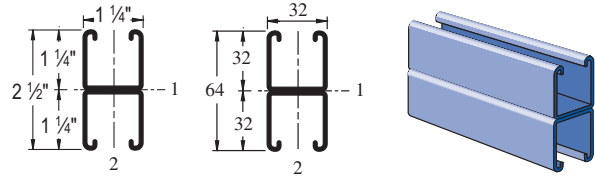

Wt/100 Ft: 207 Lbs (308 kg/100m)
 Allowable Moment 6,070 In-Lbs (690 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

A1000 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Defl.		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	960	0.04	960	960	960
24	720	0.07	720	720	660
36	480	0.16	480	440	300
48	360	0.29	330	250	170
60	290	0.45	210	160	110
72	240	0.65	150	110	70
84	210	0.90	110	80	50
96	180	1.16	80	60	40
108	160	1.46	70	50	30
120	140	1.75	50	40	30

A1001 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Defl.		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	1,650*	0.01	1,650*	1,650*	1,650*
24	1,650*	0.03	1,650*	1,650*	1,650*
36	1,350	0.09	1,350	1,350	1,350
48	1,010	0.16	1,010	1,010	820
60	810	0.26	810	790	530
72	670	0.37	670	550	370
84	580	0.50	540	400	270
96	510	0.66	410	310	210
108	450	0.83	330	240	160
120	400	1.01	260	200	130

A1000 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
18	1,960	5,900	5,430	4,800	4,210
24	1,840	5,210	4,590	3,850	3,220
36	1,500	3,940	3,220	2,480	2,010
48	1,220	2,950	2,300	1,790	1,460
60	1,020	2,260	1,790	1,400	1,130
72	880	1,840	1,460	1,130	910
84	780	1,550	1,230	940	**
96	690	1,340	1,050	**	**
108	620	1,170	910	**	**

A1001 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
18	3,530	13,300	12,920	12,400	11,880
24	3,480	12,750	12,220	11,550	10,950
36	3,370	11,630	10,950	10,220	9,150
48	3,260	10,680	10,020	8,260	6,500
60	2,960	9,930	8,260	6,080	4,270
72	2,630	8,480	6,500	4,270	2,970
84	2,260	7,040	4,900	3,140	2,180
96	1,940	5,680	3,750	2,400	**
108	1,670	4,490	2,970	**	**
120	1,440	3,640	2,400	**	**

A1000/A1001 - ELEMENTS OF SECTION

Parameter	A1000	A1001
Area of Section	0.305 In ²	0.609 In ²
Axis 1-1		
Moment of Inertia (I)	0.061 In ⁴	0.302 In ⁴
Section Modulus (S)	0.086 In ³	0.242 In ³
Radius of Gyration (r)	0.447 In	0.704 In
Axis 2-2		
Moment of Inertia (I)	0.078 In ⁴	0.156 In ⁴
Section Modulus (S)	0.125 In ³	0.250 In ³
Radius of Gyration (r)	0.506 In	0.506 In

Notes:

* Load limited by spot weld shear.

** $K_L/r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.



A1000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	3.2	2	3.2	3.2	3.1
750	2.6	3	2.6	2.6	2.0
1,000	2.0	5	2.0	1.6	1.1
1,250	1.6	8	1.4	1.1	0.7
1,500	1.3	11	1.0	0.7	0.5
1,750	1.1	15	0.7	0.5	0.4
2,000	1.0	20	0.5	0.4	0.3
2,500	0.8	32	0.4	0.3	0.2
3,000	0.7	46	0.2	0.2	0.1

A1001 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	7.3*	1	7.3*	7.3*	7.3
750	7.3*	2	7.3*	7.3*	7.3
1,000	5.5	3	5.5	5.5	5.5
1,250	4.4	4	4.4	4.4	3.5
1,500	3.6	6	3.6	3.6	2.4
1,750	3.2	9	3.2	2.7	1.8
2,000	2.8	11	2.7	2.0	1.4
2,500	2.2	17	1.7	1.3	0.9
3,000	1.8	25	1.2	0.9	0.6
3,500	1.6	34	0.9	0.7	0.4

A1000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	8.2	23.4	20.7	17.3	14.6
750	7.5	20.5	17.3	14.0	11.3
1,000	6.3	16.2	13.0	9.9	8.1
1,250	5.3	12.8	9.9	7.7	6.3
1,500	4.6	10.2	8.1	6.3	5.2
1,750	4.1	8.6	6.8	5.3	4.3
2,000	3.6	7.4	5.9	4.5	**
2,250	3.3	6.5	5.2	3.9	**
2,500	3.0	5.8	4.5	**	**
2,750	2.7	5.2	4.0	**	**

A1001 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	15.5	56.9	54.5	51.6	48.9
750	15.2	54.4	51.6	48.4	45.7
1,000	14.9	50.4	47.4	43.9	37.4
1,250	14.4	47.2	43.9	35.7	27.8
1,500	13.3	44.6	37.4	27.8	19.6
1,750	12.1	39.4	30.9	20.7	14.4
2,000	10.8	34.1	24.8	15.9	11.0
2,250	9.5	29.0	19.6	12.5	**
2,500	8.4	24.1	15.9	10.2	**
2,750	7.4	19.9	13.1	**	**

A1000/A1001 - ELEMENTS OF SECTION (METRIC)

Parameter	A1000	A1001
Area of Section	1.96 cm ²	3.93 cm ²
Axis 1-1		
Moment of Inertia (I)	2.53 cm ⁴	12.57 cm ⁴
Section Modulus (S)	1.41 cm ³	3.96 cm ³
Radius of Gyration (r)	1.14 cm	1.79 cm
Axis 2-2		
Moment of Inertia (I)	3.25 cm ⁴	6.50 cm ⁴
Section Modulus (S)	2.05 cm ³	4.09 cm ³
Radius of Gyration (r)	1.29 cm	1.29 cm

Notes:


* Load limited by spot weld shear.

** $K L / r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.


Finishes: PL, GR, HG, PG Standard Lengths: 10' & 20'

A1001A - 1 1/4" x 2 1/2"

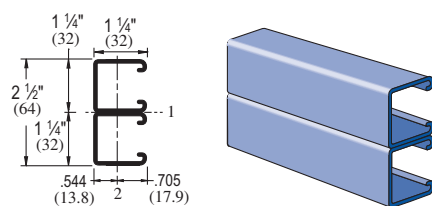


Wt/100 Ft: 207 Lbs (308 kg/100m)
 Allowable Moment 7,930 In-Lbs (900 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

A1001B - 1 1/4" x 2 1/2"

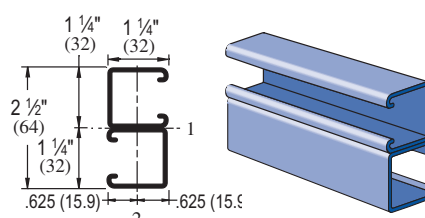

Wt/100 Ft: 207 Lbs (308 kg/100m)
 Allowable Moment 7,930 In-Lbs (900 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)



A1001C - 1 1/4" x 2 1/2"

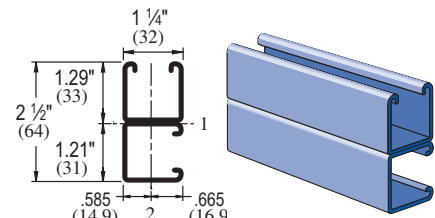

Wt/100 Ft: 207 Lbs (308 kg/100m)
 Allowable Moment 6,760 In-Lbs (760 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)



15/16" Channel
 Teleslur System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

A3300 – 1 1/4" x 3/4"

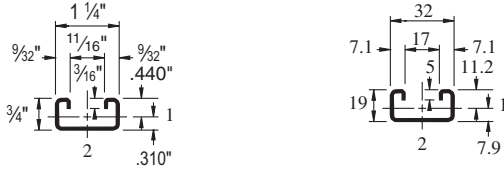

Wt/100 Ft: 78 Lbs (116 kg/100m)
 Allowable Moment 950 In-Lbs (110 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

A3301 – 1 1/4" x 1 1/2"

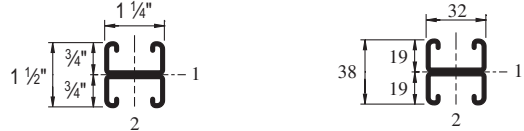

Wt/100 Ft: 156 Lbs (232 kg/100m)
 Allowable Moment 2,590 In-Lbs (290 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

A3300 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	420	0.07	420	420	320
24	320	0.12	320	270	180
36	210	0.26	160	120	80
48	160	0.47	90	70	50
60	130	0.75	60	40	30
72	110	1.09	40	30	20
84	90	1.42	30	20	10
96	80	1.88	20	20	10

A3301 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	990*	0.03	990*	990*	990*
24	860	0.07	860	860	850
36	580	0.15	580	560	380
48	430	0.27	420	320	210
60	350	0.43	270	200	140
72	290	0.62	190	140	90
84	250	0.85	140	100	70
96	220	1.11	110	80	50

A3300 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Max. Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
18	1,430	4,490	4,210	3,860	3,550
24	1,370	4,090	3,750	3,310	2,680
36	1,190	3,390	2,680	1,820	1,260
48	900	2,380	1,600	1,020	**
60	680	1,550	1,020	**	**

A3301 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Max. Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
18	2,540	9,890	9,620	9,300	9,020
24	2,510	9,510	9,200	8,710	7,960
36	2,410	8,800	7,960	6,730	5,490
48	2,230	7,560	6,320	4,690	3,310
60	1,970	6,210	4,690	3,050	2,120
72	1,650	4,890	3,310	2,120	**
84	1,380	3,680	2,430	**	**
96	1,160	2,820	1,860	**	**

A3300/A3301 - ELEMENTS OF SECTION

Parameter	A3300	A3301
Area of Section	0.230 In ²	0.459 In ²
Axis 1-1		
Moment of Inertia (I)	0.017 In ⁴	0.077 In ⁴
Section Modulus (S)	0.038 In ³	0.103 In ³
Radius of Gyration (r)	0.269 In	0.411 In
Axis 2-2		
Moment of Inertia (I)	0.052 In ⁴	0.104 In ⁴
Section Modulus (S)	0.083 In ³	0.167 In ³
Radius of Gyration (r)	0.477 In	0.477 In

Notes:

* Load limited by spot weld shear.

** KL_r > 200

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.



A3300 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	1.4	3	1.4	1.2	0.8
750	1.2	5	1.1	0.8	0.5
1,000	0.8	8	0.6	0.4	0.3
1,250	0.7	12	0.4	0.3	0.2
1,500	0.6	18	0.3	0.2	0.1
1,750	0.5	24	0.2	0.1	0.1
2,000	0.4	33	0.1	0.1	0.1

A3301 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	3.9	2	3.9	3.9	3.9
750	3.1	3	3.1	3.1	2.5
1,000	2.4	5	2.4	2.1	1.4
1,250	1.9	7	1.8	1.3	0.9
1,500	1.6	10	1.2	0.9	0.6
1,750	1.3	14	0.9	0.7	0.4
2,000	1.2	18	0.7	0.5	0.4
2,500	0.9	29	0.4	0.4	0.2
3,000	0.8	43	0.3	0.2	0.1

A3300 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	6.1	18.3	16.8	14.9	12.2
750	5.8	16.7	14.9	11.5	8.4
1,000	4.9	13.8	10.4	6.8	4.7
1,250	3.9	10.1	6.8	4.3	**
1,500	3.1	7.1	4.7	**	**

A3301 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	11.2	42.4	41.0	39.0	35.7
750	11.0	40.9	39.0	34.9	30.4
1,000	10.5	37.7	33.4	27.4	21.4
1,250	9.8	33.0	27.4	20.0	14.0
1,500	8.9	28.1	21.4	14.0	9.7
1,750	7.7	23.2	16.1	10.3	**
2,000	6.7	18.6	12.3	7.9	**
2,250	5.8	14.7	9.7	**	**
2,500	5.0	11.9	7.9	**	**

A3300/A3301 - ELEMENTS OF SECTION (METRIC)

Parameter	A3300		A3301	
Area of Section	1.48	cm ²	2.96	cm ²
Axis 1-1				
Moment of Inertia (I)	0.69	cm ⁴	3.22	cm ⁴
Section Modulus (S)	0.62	cm ³	1.69	cm ³
Radius of Gyration (r)	0.68	cm	1.04	cm
Axis 2-2				
Moment of Inertia (I)	2.17	cm ⁴	4.34	cm ⁴
Section Modulus (S)	1.37	cm ³	2.73	cm ³
Radius of Gyration (r)	1.21	cm	1.21	cm

Notes:


* Load limited by spot weld shear.

** $kl/r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.


1 1/4" Framing System
 Product Index
 PrimeAngle System
 Special Metals
 Fiberglass System
 1 3/16" Framing System
 1 1/4" Framing System
 Concrete Inserts
 Electrical Fittings
 Pipe/Conduit Supports
 General Fittings
 Hardware
 Telestrut System
 Channel
 1 5/8"

A4000 – 1 1/4" x 5/8"

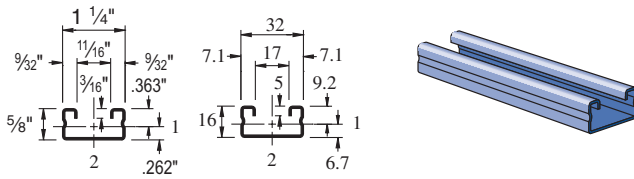

Wt/100 Ft: 45 Lbs (67 kg/100m)
 Allowable Moment 560 In-Lbs (60 N•m)
 19 Gauge Nominal Thickness .040" (1.0mm)

A4001– 1 1/4" x 1 1/4"

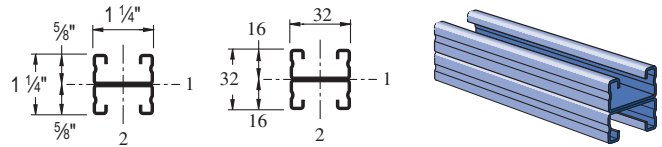

Wt/100 Ft: 90 Lbs (134 kg/100m)
 Allowable Moment 1,470 In-Lbs (170 N•m)
 19 Gauge Nominal Thickness .040" (1.0mm)

A4000 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	250	0.08	250	220	150
24	190	0.15	170	120	80
36	120	0.32	70	60	40
48	90	0.58	40	30	20
60	70	0.88	30	20	10
72	60	1.30	20	10	10

A4001 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	350*	0.02	350*	350*	350*
24	350*	0.06	350*	350*	350*
36	330	0.19	330	270	180
48	240	0.32	200	150	100
60	200	0.52	130	100	60
72	160	0.72	90	70	40
84	140	1.00	70	50	30

A4000 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Max. Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
18	960	2,510	2,290	1,990	1,700
24	880	2,190	1,890	1,530	1,230
36	670	1,570	1,230	830	580
48	470	1,110	730	470	**
60	340	710	470	**	**

A4001 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Max. Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
18	1,640	5,640	5,420	5,110	4,800
24	1,600	5,320	5,000	4,600	4,240
36	1,510	4,650	4,240	3,500	2,730
48	1,330	4,030	3,240	2,250	1,560
60	1,090	3,170	2,250	1,440	1,000
72	870	2,370	1,560	1,000	**
84	700	1,740	1,150	**	**

A4000/A4001 - ELEMENTS OF SECTION

Parameter	A4000	A4001
Area of Section	0.132	0.264
Axis 1-1	In ²	In ²
Moment of Inertia (I)	0.008	0.037
Section Modulus (S)	0.022	0.058
Radius of Gyration (r)	0.240	0.372
Axis 2-2	In	In
Moment of Inertia (I)	0.029	0.058
Section Modulus (S)	0.046	0.093
Radius of Gyration (r)	0.469	0.469

Notes:

* Load limited by spot weld shear.

** $KL/r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.



A4000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	0.8	4	0.8	0.6	0.4
750	0.7	6	0.5	0.4	0.3
1,000	0.5	10	0.3	0.2	0.1
1,250	0.4	16	0.2	0.1	0.1
1,500	0.4	24	0.1	0.1	0.0

A4001 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	1.6*	1	1.6*	1.6*	1.6
750	1.6*	3	1.6*	1.6*	1.2
1,000	1.3	6	1.3	1.0	0.7
1,250	1.1	9	0.8	0.6	0.4
1,500	0.9	13	0.6	0.4	0.3
1,750	0.8	17	0.4	0.3	0.2
2,000	0.7	22	0.3	0.3	0.2

A4000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	3.9	9.8	8.5	6.9	5.6
750	3.5	8.4	6.9	5.3	3.8
1,000	2.8	6.4	4.8	3.1	2.1
1,250	2.0	4.7	3.1	**	**
1,500	1.5	3.2	2.1	**	**

A4001 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	7.1	23.8	22.4	20.6	19.0
750	6.9	22.3	20.6	18.6	15.8
1,000	6.6	19.9	17.8	13.9	10.3
1,250	5.8	17.5	13.9	9.5	6.6
1,500	4.9	14.4	10.3	6.6	4.6
1,750	4.1	11.4	7.6	4.8	**
2,000	3.4	8.8	5.8	**	**
2,250	2.9	6.9	4.6	**	**

A4000/A4001 - ELEMENTS OF SECTION (METRIC)

Parameter	A4000		A4001	
	Value	Unit	Value	Unit
Area of Section	0.85	cm ²	1.70	cm ²
Axis 1-1				
Moment of Inertia (I)	0.32	cm ⁴	1.52	cm ⁴
Section Modulus (S)	0.37	cm ³	0.96	cm ³
Radius of Gyration (r)	0.61	cm	0.94	cm
Axis 2-2				
Moment of Inertia (I)	1.21	cm ⁴	2.42	cm ⁴
Section Modulus (S)	0.76	cm ³	1.52	cm ³
Radius of Gyration (r)	1.19	cm	1.19	cm

Notes:



* Load limited by spot weld shear.

** $KL/r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.

15/16" Channel
 Teleslur System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

A5000 – 1 1/4" x 2 1/2"

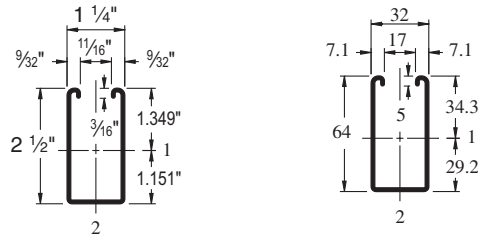

Wt/100 Ft: 167 Lbs (249 kg/100m)
 Allowable Moment 6,670 In-Lbs (750 N•m)
 14 Gauge Nominal Thickness .075" (1.9mm)

A5000 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load Lbs	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
24	2,220	0.04	2,220	2,220	2,220
36	1,480	0.09	1,480	1,480	1,480
48	1,110	0.15	1,110	1,110	980
60	890	0.24	890	890	630
72	740	0.34	740	650	430
84	640	0.47	640	480	320
96	560	0.61	490	370	240
108	490	0.76	390	290	190
120	440	0.94	310	230	160

A5000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
600	10.1	1	10.1	10.1	10.1
750	8.1	1	8.1	8.1	8.1
1,000	6.1	3	6.1	6.1	6.1
1,250	4.8	4	4.8	4.8	4.1
1,500	4.0	6	4.0	4.0	2.9
1,750	3.4	8	3.4	3.2	2.1
2,000	3.0	10	3.0	2.4	1.6
2,500	2.4	16	2.1	1.6	1.0
3,000	2.0	23	1.4	1.1	0.7

A5000 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Max. Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
24	2,790	7,950	6,670	5,080	3,760
36	1,950	5,270	3,760	2,600	1,970
48	1,360	3,290	2,350	1,690	1,330
60	990	2,300	1,690	1,260	1,010
72	790	1,750	1,330	1,010	830
84	660	1,420	1,100	860	710
96	570	1,200	940	740	**
108	510	1,040	830	**	**
120	460	930	740	**	**

A5000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Max. Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
600	12.5	35.8	30.2	23.1	17.2
750	10.7	29.7	23.1	16.0	11.9
1,000	7.8	20.5	14.4	10.1	7.7
1,250	5.8	14.0	10.1	7.3	5.7
1,500	4.5	10.5	7.7	5.7	4.6
1,750	3.7	8.3	6.2	4.8	3.9
2,000	3.2	6.9	5.3	4.1	3.3
2,250	2.8	5.9	4.6	3.6	3.0
2,500	2.5	5.2	4.1	3.2	**

A5000 - ELEMENTS OF SECTION

Parameter	A5000	
Area of Section	0.492	In ²
Axis 1-1		
Moment of Inertia (I)	0.358	In ⁴
Section Modulus (S)	0.265	In ³
Radius of Gyration (r)	0.853	In
Axis 2-2		
Moment of Inertia (I)	0.143	In ⁴
Section Modulus (S)	0.229	In ³
Radius of Gyration (r)	0.539	In

A5000 - ELEMENTS OF SECTION (METRIC)

Parameter	A5000	
Area of Section	3.17	cm ²
Axis 1-1		
Moment of Inertia (I)	14.91	cm ⁴
Section Modulus (S)	4.35	cm ³
Radius of Gyration (r)	2.17	cm
Axis 2-2		
Moment of Inertia (I)	5.94	cm ⁴
Section Modulus (S)	3.74	cm ³
Radius of Gyration (r)	1.37	cm

Notes:

* Load limited by spot weld shear.

** $KL/r > 200$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.



BEARING LOADS ON UNISTRUT CHANNEL

Loads are calculated based on 2001 Specification For The Design Of Cold Formed Steel Structural Members published by AISI

Channel	Bearing Length 1 1/4" (32 mm) Maximum Allowable Loads - Lbs (kN)	Bearing Length 1 1/4" (32 mm) Maximum Allowable Loads - Lbs (kN)	Bearing Length 2 1/2" (64 mm) Maximum Allowable Loads - Lbs (kN)
A1000	3,700 (16.46)	1,700 (7.56)	4,300 (19.13)
A3300	3,800 (16.90)	1,700 (7.56)	4,300 (19.13)
A4000	1,200 (5.34)	600 (2.67)	1,400 (6.23)
A5000	3,600 (16.01)	1,600 (7.12)	4,200 (18.68)

MAXIMUM ALLOWABLE PULL-OUT AND SLIP LOADS

Nut Size/ Thread	Channel	Gauge	Max Allowable Pull-Out Lbs (kN)	Resistance to Slip Lbs (kN)	Torque Ft-Lbs (N·m)
3/8" -16	A1000	14	900	500	19
			4.00	2.22	26
5/16" -18	A3300	14	900	500	11
			4.00	2.22	15
1/4" -20	A5000	14	900	500	6
			4.00	2.22	8
3/8" -16	A4000	19	300	400	19
			1.33	1.78	26

Nut design loads include a minimum safety factor of 3.

CHANNEL NUT WITH SPRING


	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	A1006-1420	1/4" -20	6 (2.7)	A1000
	A1007	5/16" -18	6 (2.7)	
	A1008	3/8" -16	6 (2.7)	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	A4006-1420	1/4" -20	5 (2.3)	A3300, A4000
	A4007	5/16" -18	5 (2.3)	
	A4008	3/8" -16	5 (2.3)	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	A5506-1420	1/4" -20	6 (2.7)	A5000
	A5007	5/16" -18	6 (2.7)	
	A5508	3/8" -16	6 (2.7)	

CHANNEL NUT WITHOUT SPRINGS

	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	A3006-1420	1/4" -20	5 (2.3)	A1000, A3300, A4000, & A5000
	A3007	5/16" -18	5 (2.3)	
	A3008	3/8" -16	5 (2.3)	
	Part Number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	A3016-0832	#8 -32	1 (0.5)	A1000, A3300, A4000, & A5000
	A3016-1024	#10 -24	1 (0.5)	
	A3016-1032	#10 -32	1 (0.5)	
	A3016-1420	1/4" -20	1 (0.5)	

1 1/4" Framing System
 Concrete Inserts
 Electrical Fittings
 Pipe/Conduit Supports
 General Fittings
 Nuts & Hardware
 Telesnut System
 Channel
 1 1/2" Channel
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

A1280 END CAP



Material: .075" (1.9)
Note: Use with A1000 channel

Wt/100 pcs: 7 Lbs (3.2 kg)


A4280 END CAP



Material: .075" (1.9)
Note: Use with A4000 channel.

Wt/100 pcs: 3 Lbs (1.4 kg)


A5280 END CAP



Material: .075" (1.9)
Note: Use with A5000 channel.

Wt/100 pcs: 14 Lbs (6.4 kg)


A1184 CLOSURE STRIP

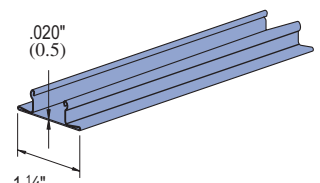

Standard Length 10 Feet
Finish:
Perma-Green II (GR), Plain (PL).


Wt/100 Ft: 21 Lbs (31.3 kg/100M)

A1191

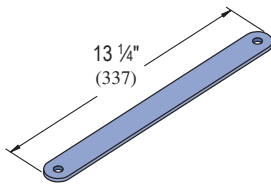


Wt/100 pcs: 87 Lbs (39.5 kg)

A1063




Wt/100 pcs: 8 Lbs (3.6 kg)

A1065



Wt/100 pcs: 17 Lbs (7.7 kg)

A1184P CLOSURE STRIP

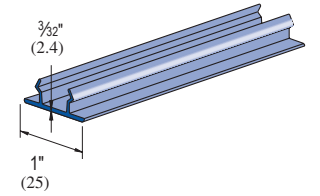


Standard length: 10 Ft.

Material: Paintable PVC.
Color: Green, Grey.


Wt/100 Ft: 21 Lbs (31.3 kg/100M)

A1066




Wt/100 pcs: 26 Lbs (11.8 kg)

A2324




Wt/100 pcs: 39 Lbs (17.7 kg)

A1036




Wt/100 pcs: 27 Lbs (12.2 kg)

A1031

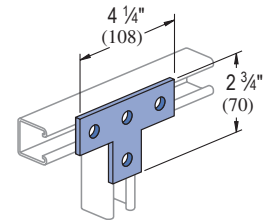


Wt/100 pcs: 34 Lbs (15.4 kg)

A1026




Wt/100 pcs: 17 Lbs (7.7 kg)

A1068

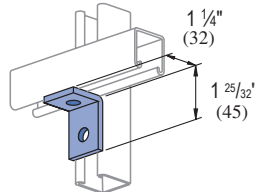


Wt/100 pcs: 17 Lbs (7.7 kg)

A1326



Wt/100 pcs: 27 Lbs (12.2 kg)

A1458

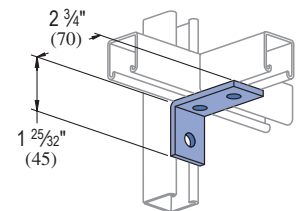


Wt/100 pcs: 27 Lbs (12.2 kg)

Standard Dimensions for 1/4" (32 mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 13/32" (10mm); Hole Spacing - From End: 5/8" (16 mm); Hole Spacing - On Center: 1 1/2" (38mm); Width: 1 1/4" (32mm); Thickness: 3/16" (5mm)




A1325

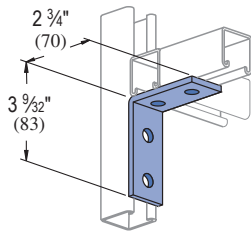


Wt/100 pcs: 38 Lbs (17.2 kg)

A1033




Wt/100 pcs: 34 Lbs (15.4 kg)

A1037

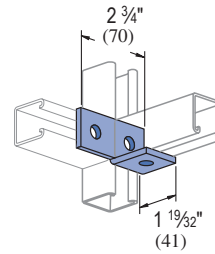


Wt/100 pcs: 30 Lbs (13.6 kg)

A1038




Wt/100 pcs: 30 Lbs (13.6 kg)

A1357

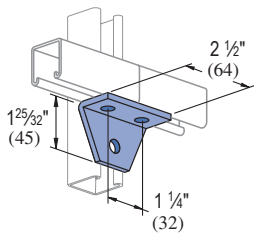


Wt/100 pcs: 30 Lbs (13.6 kg)

A1331




Wt/100 pcs: 75 Lbs (34.0 kg)

A1332




Wt/100 pcs: 75 Lbs (34.0 kg)

A1579

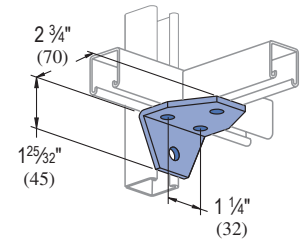


Wt/100 pcs: 44 Lbs (20.0 kg)

A2235

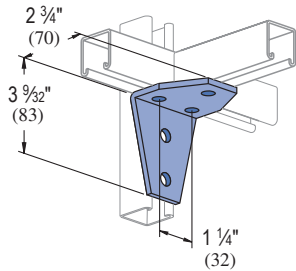


Wt/100 pcs: 59 Lbs (26.8 kg)

A2120

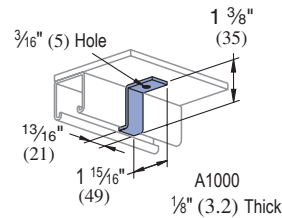


Wt/100 pcs: 9 Lbs (4.1 kg)

A4120

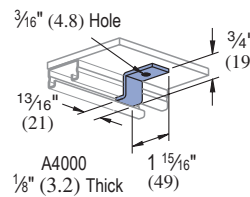


Wt/100 pcs: 7 Lbs (3.2 kg)

A5120

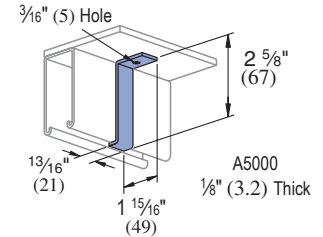


Wt/100 pcs: 13 Lbs (5.9 kg)

A1045

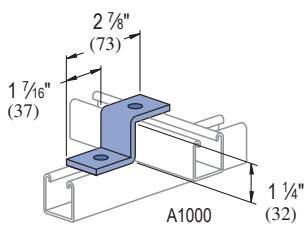


Wt/100 pcs: 25 Lbs (11.3 kg)

A3345

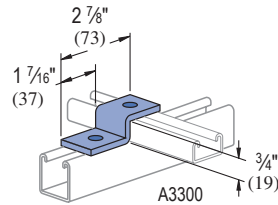


Wt/100 pcs: 23 Lbs (10.4 kg)

A4045

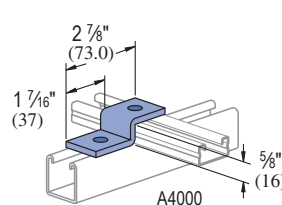

Wt/100 pcs: 21 Lbs (9.5 kg)

A5045

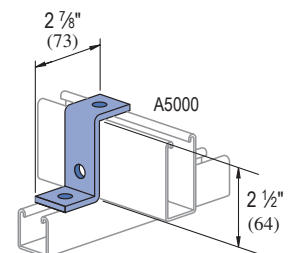


Wt/100 pcs: 33 Lbs (15.0 kg)

Standard Dimensions for 1 1/4" (32 mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 13/32" (10mm); **Hole Spacing - From End:** 5/8" (16 mm); **Hole Spacing - On Center:** 1 1/2" (38 mm); **Width:** 1 1/4" (32mm); **Thickness:** 3/16" (5mm)

1 1/2" Channel
 Telestrut System
 Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index


A2109, A2110, A2111

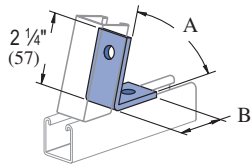

Part Number	A Degree (rad)	B In (mm)
A2109	52½° 0.92	1 25/32 45
A2110	45° 0.79	1 3/4 45
A2111	37½° 0.65	1 3/4 45

Wt/100 pcs: 23 Lbs (10.4 kg)


A2125, A2126, A2127



Part Number	A Degree (rad)	B In (mm)
A2125	52½° 0.92	1 1/4 32
A2126	45° 0.79	1 1/4 32
A2127	37½° 0.65	1 3/8 33


Wt/100 pcs: 17 Lbs (7.7 kg)

A2084

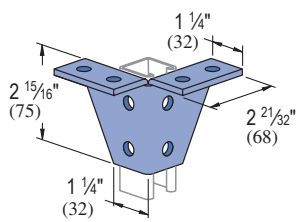

Wt/100 pcs: 90 Lbs (40.8 kg)


A2341 R-L



R-As shown
L-Opposite hand

Wt/100 pcs: 26 Lbs (11.8 kg)


A2472 R-L



R-As shown
L-Opposite hand


Wt/100 pcs: 33 Lbs (15.0 kg)

A2223

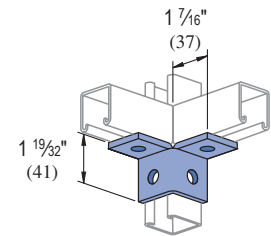


Wt/100 pcs: 34 Lbs (15.4 kg)

A2345

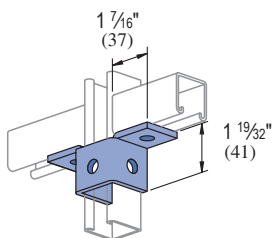


Wt/100 pcs: 41 Lbs (18.6 kg)

A2227

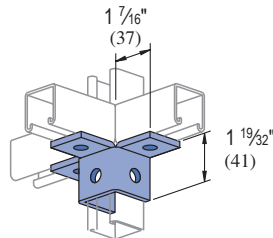


Wt/100 pcs: 52 Lbs (23.6 kg)

A1047

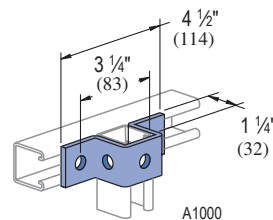


Wt/100 pcs: 43 Lbs (19.5 kg)

A3347

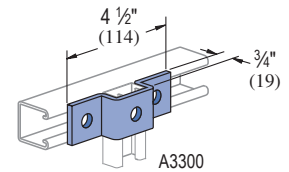


Wt/100 pcs: 37 Lbs (16.8 kg)

A4047

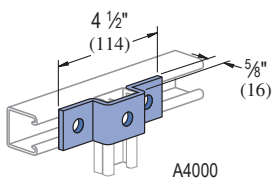


Wt/100 pcs: 34 Lbs (15.4 kg)

A5047

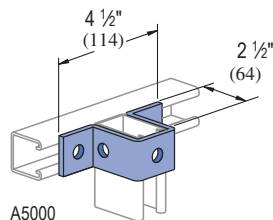

Wt/100 pcs: 58 Lbs (26.3 kg)

A5043

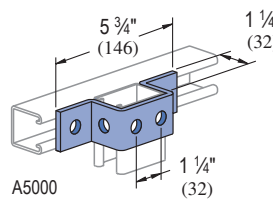

Wt/100 pcs: 50 Lbs (22.7 kg)


Standard Dimensions for 1/4" (32 mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 13/32" (10mm); Hole Spacing - From End: 5/8" (16 mm); Hole Spacing - On Center: 1 1/2" (38mm); Width: 1 1/4" (32mm); Thickness: 3/16" (5mm)



A2608 THRU A2617


UNI-CLIP®

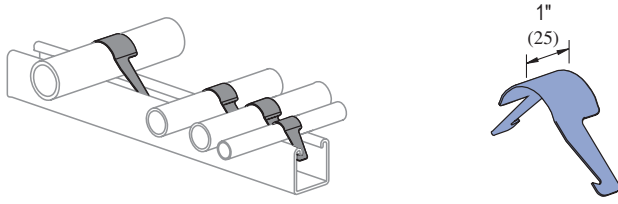

Part Number	Pipe Size In (mm)	O.D. Size In (mm)	Wt/100 pcs Lbs (kg)
A2608	1/4 6	0.540 13.7	0.6 0.3
A2609	3/8 10	0.675 17.1	0.7 0.3
A2611	1/2 13	0.840 21.3	1.0 0.5
A2612	3/4 19	1.050 26.7	1.4 0.6
A2613	1 25	1.315 33.4	2.0 0.9
A2614	1 1/4 32	1.660 42.2	2.4 1.1
A2615	1 1/2 38	1.900 48.3	3.2 1.5
A2617	2 51	2.375 60.3	4.7 2.1

Stainless steel, Type 301.
Patent No. 2863625.

A2491 R-L, A2492 R-L, A2493 R-L

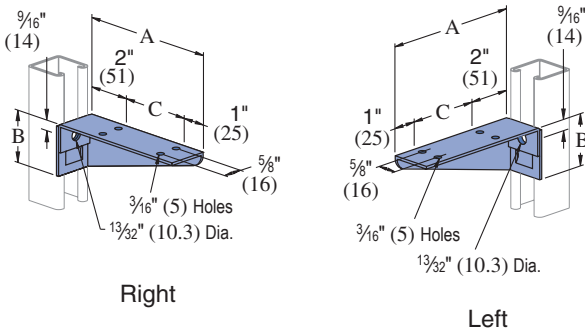


Part Number	A In (mm)	B In (mm)	C In (mm)	Wt/100 pcs Lbs (kg)
A2491 R-L	6 152	2 51	3 76	38 17.2
A2492 R-L	8 203	2 1/2 64	5 126	56 25.4
A2493 R-L	10 254	3 76	7 178	73 33.1

Design Uniform Load
(Channel Upright Listed)
A1000 200 Lbs (.89 kN)
A4000 130 Lbs (.58 kN)
Safety Factor of 2 1/2


Material: 14 Gauge Steel.

A2494 R-L THRU A2497 R-L

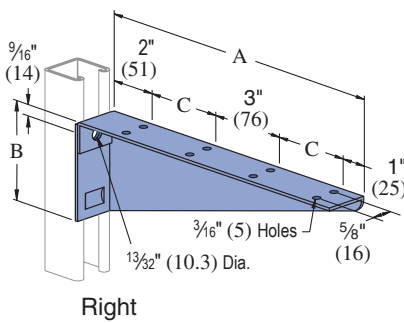

Design Uniform Load
(Channel Upright Listed)
A1000 200 Lbs (.89 kN)
A4000 130 Lbs (.58 kN)
Safety Factor of 2 1/2

Part Number	A In (mm)	B In (mm)	C In (mm)	Wt/100 pcs Lbs (kg)
A2494 R-L	12 305	3 1/2 89	3 76	94 42.6
A2495 R-L	14 356	4 102	4 102	105 47.6
A2496 R-L	16 406	4 1/2 114	5 127	145 65.8
A2497 R-L	18 457	5 127	6 152	175 79.4

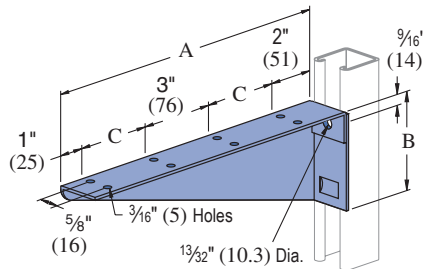


Material: 14 Gauge Steel.

Standard Dimensions for 1 1/4" (32 mm) width series channel fittings (Unless Otherwise Shown on Drawing)
Hole Diameter: 1 3/32" (10mm); Hole Spacing - From End: 5/8" (16 mm); Hole Spacing - On Center: 1 1/2" (38 mm); Width: 1 1/4" (32mm); Thickness: 3/16" (5mm)

1 1/2" Channel
 Telesnut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index



1³/₁₆" FRAMING SYSTEM

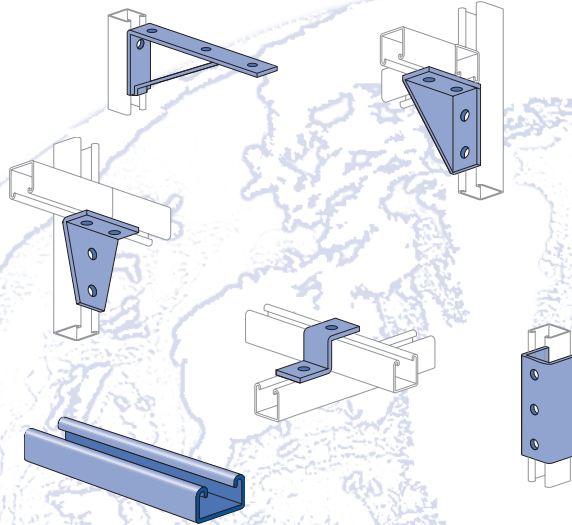

P6000 (19 Gauge)	157-158
P7000 (19 Gauge)	159-160
Channel Nuts and Closure Strips	161
Flat Plate Fittings	161-162
Ninety Degree Fittings.....	162
Angular Fittings	162-164
"Z" Shape Fittings	164
"U" Shape Fittings	164-165
Special Application Fittings.....	165
Beam Clamps.....	166
Tubing Clips	166

MATERIAL

Channels are accurately and carefully cold formed to size from low-carbon strip steel.

STEEL: PLAIN

19 Gauge (1.0 mm) ASTM A1008

STEEL: PRE-GALVANIZED

19 Gauge (1.0 mm) ASTM A653 GR 33

All nuts are manufactured from mild steel bars conforming to ASTM A1011 SS Grade 33.

Fittings are made from hot rolled, pickled and oiled steel plate or strip and conform to ASTM A1011 SS GR 33.

FINISHES

Channels are available in: Perma-Green III (GR), electro-galvanized (EG), Pre-galvanized (PG), conforming to ASTM A653 GR 33 and plain (PL).

Nuts are available in plain or electro-galvanized (EG) finish.

Fittings are available in Perma-Green III, electrogalvanized (EG) with zinc electrolytically to commercial standards ASTM B653-G90 Type III SC1; or plain (PL).

STANDARD LENGTHS

P-6000 – 16 Feet (4.88m)

P-7000 – 10 Feet (3.05m)

Tolerances are +¹/₈" (3.2 mm) to +¹/₂" (12.7 mm) to allow for cutting. Special lengths are available for a small cutting charge with a tolerance of ±¹/₈" (3.2mm).

APPLICATION

A unique half-size reduction of the 1⁵/₈" channel width series, this smaller channel size can be used to carry light loads economically in applications such as instrumentation, retail displays and light-duty laboratory supports. It also provides the flexibility found in all Unistrut® framing systems.

DESIGN BOLT TORQUE

BOLT SIZE	1/4"-20	Rec. Torque Ft/Lbs (N•m)	6 (8)	Max Torque Ft/Lbs (N•m)	7 (9)
-----------	---------	--------------------------	----------	-------------------------	----------

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

LOAD DATA

All beam and column load data pertains to carbon steel and stainless steel channels. Load tables and charts are constructed to be in accordance with the SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS 2001 EDITION published by the AMERICAN IRON AND STEEL INSTITUTE USING ASD METHOD.


Type of Load	Safety Factor to Yield Strength	Safety Factor to Ultimate Strength
Beam Loads	1.67	2.0
Column Load	1.80	2.2




P6000 Series

P7000 Series


13/16" x 13/16"
19 Ga.




P6000 - Pg 157




P6001 - Pg 157



P6001 A - Pg 158




P6001 B - Pg 158




P6001 C - Pg 158

13/16" x 13/32"
19 Ga.



P7000 - Pg 159



P7001 - Pg 159

Channel Nuts & Closures

13/16" Series Fittings



P6006-0832 - Pg 161




P7006-0832 - Pg 161



P6280 - Pg 161



P7280 - Pg 161



P6184P - Pg 161




P6062 - Pg 161




P6065 - Pg 161



P6924 - Pg 161



P7325 - Pg 161



P7324 - Pg 161



P6925 - Pg 161



P6066 - Pg 161



P6067 - Pg 161



P6962 - Pg 161



P6356 A - Pg 161



P6358 A - Pg 161



P6726 A - Pg 162



P6334 - Pg 162



P6380 - Pg 162



P6036 - Pg 162



P6380 A - Pg 162



P6031 - Pg 162



P6028 - Pg 162



P6026 - Pg 162



P6068 - Pg 162



P6281 - Pg 162




P6069 - Pg 162




P6326 - Pg 162




P6346 - Pg 162




P6458 - Pg 162




P6325 - Pg 162




P6033 - Pg 162




P6037 - Pg 163




P6038 - Pg 163




P6357 - Pg 163




P6359 - Pg 163




P6579 - Pg 163




P6728 - Pg 163




P6917 - Pg 163




P6918 - Pg 163




P7235 - Pg 163




P6130 - Pg 163




P6290 - Pg 163




P6291 - Pg 163




P6381 - Pg 163




P6382 - Pg 163



P6887 - Pg 163



P6331 - Pg 163




P6332 - Pg 164



P6546 - Pg 164




P6186 - Pg 164



P6045 - Pg 164



P7045 - Pg 164




P6347 - Pg 164




P7347 - Pg 164




P6453 - Pg 164




P6454 - Pg 164



P6758 - Pg 164



P7758 - Pg 164



P6047 - Pg 164




P6737 - Pg 164



P6048 - Pg 164




P7048 - Pg 165




P6376 - Pg 165




P7376 - Pg 165




P6376 A - Pg 165




P7376 A - Pg 165




P6377 - Pg 165



P7377 - Pg 165



P6044 - Pg 165



P6455 - Pg 165



P6973 - Pg 165



P6349 - Pg 165




P6353 - Pg 165



P6127 - Pg 165



P6379 S - Pg 166



P6386 - Pg 166




P6805 - Pg 166



P7008 - Pg 166


15/16" Channel
 Telesit System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 13/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P6000

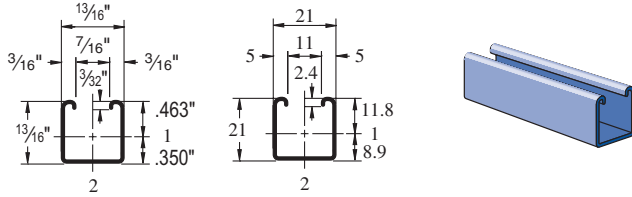

Wt/100 Ft: 36 Lbs (54 kg/100 m)
 Allowable Moment 510 In-Lbs (60 N*m)
 19 Gauge Nominal Thickness .040" (1.0 mm)

P6001

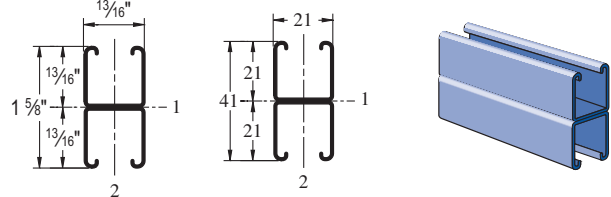

Wt/100 Ft: 73 Lbs (108 kg/100 m)
 Allowable Moment 1,390 In-Lbs (160 N*m)
 19 Gauge Nominal Thickness .040" (1.0 mm)

P6000 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	230	0.06	230	230	180
24	170	0.11	170	150	100
30	140	0.18	130	100	70
36	110	0.24	90	70	50
42	100	0.35	70	50	30
48	80	0.42	50	40	30
54	80	0.60	40	30	20
60	70	0.72	30	20	20
66	60	0.82	30	20	10
72	60	1.06	20	20	10

P6001 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	620	0.04	620	620	620
24	460	0.06	460	460	460
30	370	0.10	370	370	320
36	310	0.14	310	310	220
42	270	0.20	270	240	160
48	230	0.25	230	180	120
54	210	0.32	190	150	100
60	190	0.40	160	120	80
66	170	0.48	130	100	70
72	150	0.55	110	80	50

P6000 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
18	600	1,660	1,400	1,100	860
24	490	1,300	1,010	740	590
30	420	990	740	560	450
36	340	770	590	450	370
42	300	630	490	380	310
48	260	540	420	330	270
54	240	470	370	290	**
60	210	410	330	**	**
66	210	370	300	**	**
72	180	340	270	**	**

P6001 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
18	1,210	4,320	4,080	3,770	3,500
24	1,170	3,980	3,680	3,330	3,060
30	1,130	3,650	3,330	3,000	2,460
36	1,070	3,370	3,060	2,460	1,800
42	1,020	3,140	2,690	1,900	1,320
48	900	2,930	2,230	1,460	1,010
54	820	2,550	1,800	1,150	800
60	700	2,180	1,460	930	**
66	700	1,830	1,210	770	**
72	550	1,530	1,010	**	**

P6000 & P6001 - ELEMENTS OF SECTION

Parameter	P6000		P6001	
Area of Section	0.107	in ²	0.213	in ²
Axis 1-1				
Moment of Inertia (I)	0.009	in ⁴	0.045	in ⁴
Section Modulus (S)	0.020	in ³	0.055	in ³
Radius of Gyration (r)	0.295	in	0.460	in
Axis 2-2				
Moment of Inertia (I)	0.012	in ⁴	0.024	in ⁴
Section Modulus (S)	0.029	in ³	0.058	in ³
Radius of Gyration (r)	0.333	in	0.333	in

Notes:

* Load limited by spot weld shear.

** $KL_r > 200$

NR = Not Recommended.

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.



P6000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
300	1.5	1	1.5	1.5	1.5
450	1.0	2	1.0	1.0	0.8
600	0.8	3	0.8	0.7	0.5
750	0.6	4	0.6	0.4	0.3
1,000	0.4	7	0.4	0.3	0.2
1,250	0.4	11	0.2	0.2	0.1
1,500	0.3	17	0.1	0.1	0.1
1,750	0.3	24	0.1	0.1	0.0

P6001 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
300	2.9*	0	2.9*	2.9*	2.9*
450	2.8	1	2.8	2.8	2.8
600	2.1	2	2.1	2.1	2.1
750	1.7	2	1.7	1.7	1.5
1,000	1.2	4	1.2	1.2	0.8
1,250	1.0	7	1.0	0.8	0.5
1,500	0.8	10	0.7	0.5	0.4
1,750	0.7	13	0.5	0.4	0.3
2,000	0.6	17	0.4	0.3	0.2

P6000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
300	3.1	9.2	8.4	7.3	6.3
450	2.7	7.5	6.3	5.0	3.9
600	2.2	5.9	4.6	3.4	2.7
750	1.8	4.5	3.4	2.5	2.0
1,000	1.4	3.0	2.4	1.8	1.5
1,250	1.1	2.3	1.8	1.4	1.2
1,500	0.9	1.9	1.5	1.2	**
1,750	0.8	1.6	1.2	**	**

P6001 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kgN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
300	5.5	20.7	20.1	19.2	18.2
450	5.4	19.3	18.2	16.9	15.7
600	5.2	17.8	16.5	14.9	13.7
750	5.0	16.4	14.9	13.5	11.2
1,000	4.6	14.4	12.9	9.5	6.7
1,250	3.9	12.7	9.5	6.2	4.3
1,500	3.2	9.9	6.7	4.3	**
1,750	2.6	7.5	4.9	**	**
2,000	2.2	5.7	3.8	**	**

P6000 & P6001 - ELEMENTS OF SECTION (METRIC)

Parameter	P6000	P6001
Area of Section	0.69 cm ²	1.38 cm ²
Axis 1-1		
Moment of Inertia (I)	0.39 cm ⁴	1.88 cm ⁴
Section Modulus (S)	0.33 cm ³	0.91 cm ³
Radius of Gyration (r)	0.75 cm	1.17 cm
Axis 2-2		
Moment of Inertia (I)	0.49 cm ⁴	0.99 cm ⁴
Section Modulus (S)	0.48 cm ³	0.96 cm ³
Radius of Gyration (r)	0.85 cm	0.85 cm

Notes:


* Load limited by spot weld shear.

** $KL_r > 200$

NR = Not Recommended.


- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.

P6001A

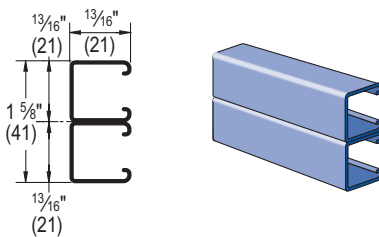


Wt/100 Ft: 73 Lbs (108 kg/100 m)
 Allowable Moment 1,820 In-Lbs (210 N*m)
 19 Gauge Nominal Thickness .040" (1.0 mm)

P6001B

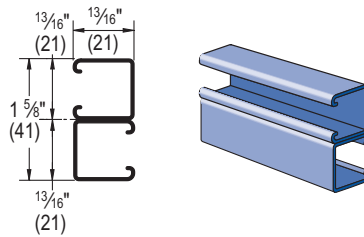

Wt/100 Ft: 73 Lbs (108 kg/100 m)
 Allowable Moment 1,820 In-Lbs (210 N*m)
 19 Gauge Nominal Thickness .040" (1.0 mm)



P6001C

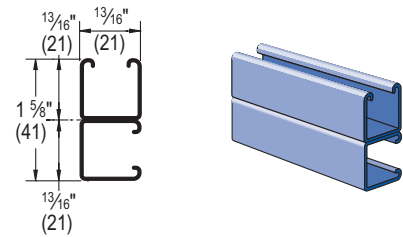

Wt/100 Ft: 73 Lbs (108 kg/100 m)
 Allowable Moment 1,550 In-Lbs (180 N*m)
 19 Gauge Nominal Thickness .040" (1.0 mm)



1 3/16" Channel
 Telesstrut System
 Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P7000

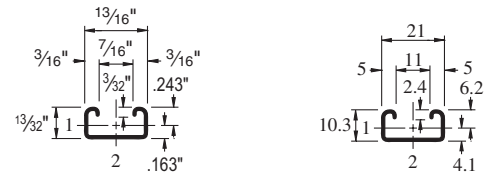

Wt/100 Ft: 25 Lbs (38 kg/100m)
 Allowable Moment 170 In-Lbs (20 N·m)
 19 Gauge Nominal Thickness .040" (1.0 mm)

P7001

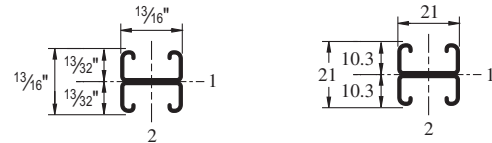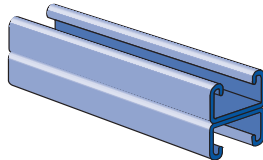

Wt/100 Ft: 50 Lbs (75 kg/100m)
 Allowable Moment 450 In-Lbs (50 N·m)
 19 Gauge Nominal Thickness .040" (1.0 mm)

P7000 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	80	0.12	60	50	30
24	60	0.22	40	30	20
30	50	0.36	20	20	10
36	40	0.50	20	10	10

P7001 - BEAM LOADING

Span In	Max Allowable Uniform Load Lbs	Defl. at Uniform Load In	Uniform Loading at Deflection		
			Span/180 Lbs	Span/240 Lbs	Span/360 Lbs
18	200	0.07	200	200	140
24	150	0.12	150	120	80
30	120	0.19	100	80	50
36	100	0.28	70	50	40
42	90	0.40	50	40	30
48	80	0.53	40	30	20

P7000 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
18	420	1,200	990	720	510
24	330	900	640	410	280
30	260	620	410	**	**
36	200	430	280	**	**

P7001 - COLUMN LOADING

Unbraced Height In	Maximum Allowable Load at Slot Face Lbs	Maximum Column Load Applied at C.G.			
		K = 0.65 Lbs	K = 0.80 Lbs	K = 1.0 Lbs	K = 1.2 Lbs
18	790	2,930	2,690	2,330	1,960
24	740	2,570	2,210	1,720	1,260
30	680	2,180	1,720	1,160	800
36	580	1,780	1,260	800	560
42	500	1,400	920	590	**
48	420	1,070	710	**	**
54	360	850	560	**	**

P7000 & P7001 - ELEMENTS OF SECTION

Parameter	P7000		P7001	
Area of Section	0.074	In ²	0.148	In ²
Axis 1-1				
Moment of Inertia (I)	0.002	In ⁴	0.007	In ⁴
Section Modulus (S)	0.007	In ³	0.018	In ³
Radius of Gyration (r)	0.150	In	0.222	In
Axis 2-2				
Moment of Inertia (I)	0.007	In ⁴	0.014	In ⁴
Section Modulus (S)	0.017	In ³	0.034	In ³
Radius of Gyration (r)	0.307	In	0.307	In

Notes:

** $KL_i > 20$

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.



P7000 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
300	0.5	1	0.5	0.5	0.4
450	0.4	3	0.3	0.2	0.1
600	0.3	5	0.2	0.1	0.1
750	0.2	9	0.1	0.1	0.0
1,000	0.2	16	0.0	0.0	0.0
1,250	0.1	24	0.0	0.0	NR
1,500	0.1	28	0.0	NR	NR

P7001 - BEAM LOADING (METRIC)

Span mm	Max Allowable Uniform Load kN	Defl. at Uniform Load mm	Uniform Loading at Deflection		
			Span/180 kN	Span/240 kN	Span/360 kN
300	1.4	1	1.4	1.4	1.4
450	0.9	2	0.9	0.9	0.7
600	0.7	3	0.7	0.5	0.4
750	0.5	5	0.5	0.4	0.2
1,000	0.4	8	0.3	0.2	0.1
1,250	0.3	13	0.2	0.1	0.1
1,500	0.3	19	0.1	0.1	NR

P7000 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
300	2.1	6.4	6.0	5.3	4.5
450	1.9	5.4	4.5	3.3	2.3
600	1.5	4.1	2.9	1.9	1.3
750	1.2	2.8	1.9	1.2	**

P7001 - COLUMN LOADING (METRIC)

Unbraced Height mm	Maximum Allowable Load at Slot Face kN	Maximum Column Load Applied at C.G.			
		K = 0.65 kN	K = 0.80 kN	K = 1.0 kN	K = 1.2 kN
300	3.6	14.0	13.6	13.0	12.1
450	3.5	13.1	12.1	10.5	8.9
600	3.3	11.6	10.0	7.8	5.8
750	3.0	9.8	7.8	5.3	3.7
1,000	2.4	6.9	4.7	3.0	**
1,250	1.8	4.5	3.0	**	**

P7000 & P7001 - ELEMENTS OF SECTION (METRIC)

Parameter	P7000		P7001	
Area of Section	0.48	cm ²	0.96	cm ²
Axis 1-1				
Moment of Inertia (I)	0.07	cm ⁴	0.31	cm ⁴
Section Modulus (S)	0.11	cm ³	0.30	cm ³
Radius of Gyration (r)	0.38	cm	0.57	cm
Axis 2-2				
Moment of Inertia (I)	0.29	cm ⁴	0.58	cm ⁴
Section Modulus (S)	0.28	cm ³	0.56	cm ³
Radius of Gyration (r)	0.78	cm	0.78	cm

Notes:

** $K_L/r > 200$

NR = Not Recommended.

- Above loads include the weight of the member. This weight must be deducted to arrive at the net allowable load the beam will support.
- Long span beams should be supported in such a manner as to prevent rotation and twist.
- Allowable uniformly distributed loads are listed for various simple spans, that is, a beam on two supports. If load is concentrated at the center of the span, multiply load from the table by 0.5 and corresponding deflection by 0.8.

BEARING LOADS ON UNISTRUT CHANNEL

Channel	Bearing Length ¹³ / ₁₆ " (21 mm) Maximum Allowable Loads - Lbs (kN)	Bearing Length ¹³ / ₁₆ " (21 mm) Maximum Allowable Loads - Lbs (kN)	Bearing Length ¹ / ₂ " (41 mm) Maximum Allowable Loads - Lbs (kN)
P6000	1,000 (4.45)	500 (2.22)	1,200 (5.34)
P7000	1,000 (4.45)	500 (2.22)	1,200 (5.34)

MAXIMUM ALLOWABLE PULL-OUT AND SLIP LOADS

Nut Size/ Thread	Max. Allowable Pull-Out Lbs (kN)	Resistance to Slip Lbs (kN)	Torque Ft-Lbs (N·m)
¹ / ₄ "-20	250 1.11	150 0.67	6 8


1 5/8" Channel
 Telesrnut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P6006-0832 THRU P6006-1420
CHANNEL NUT W/SPRING



Part Number	Thread Size In	Wt/100 pcs Lbs (kg)
P6006-0836	#8 - 36	1 (0.5)
P6006-0832	#8 - 32	1 (0.5)
P6006-1032	#10 - 32	1 (0.5)
P6006-1024	#10 - 24	1 (0.5)
P6006-1420	1/4" - 20	1 (0.5)

P6184 P - CLOSURE STRIP



Material: PVC, Plastic.
Standard Length: 10 Feet (3.05 m).

Wt/100 Ft: 4 Lbs (6.0 kg/100m)


P7325

P7006-0832 THRU P7006-1420
CHANNEL NUT W/SPRING



Part Number	Thread Size In	Wt/100 pcs Lbs (kg)
P7006-0836	#8 - 36	1 (0.5)
P7006-0832	#8 - 32	1 (0.5)
P7006-1032	#10 - 32	1 (0.5)
P7006-1024	#10 - 24	1 (0.5)
P7006-1420	1/4" - 20	1 (0.5)


P6062



Wt/100 pcs: 2 Lbs (0.9 kg)

P7324

P6280 - END CAP FOR P6000




Material: .060" (1.5)

Wt/100 pcs: 3 Lbs (1.4 kg)

P6065


P7280 - END CAP FOR P7000



Material: .048" (1.2)


Wt/100 pcs: 1 Lbs (0.5 kg)

P6924




Wt/100 pcs: 7 Lbs (3.2 kg)

P6067




Wt/100 pcs: 10 Lbs (4.5 kg)

P6962




Wt/100 pcs: 7 Lbs (3.2 kg)

P6356A




Wt/100 pcs: 8 Lbs (3.6 kg)

P6358A




Wt/100 pcs: 11 Lbs (5.0 kg)


13/16" Framing System



Wt/100 pcs: 19 Lbs (8.6 kg)



Wt/100 pcs: 10 Lbs (4.5 kg)

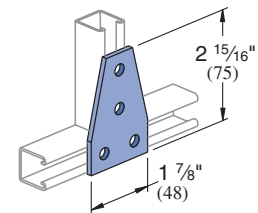


Wt/100 pcs: 15 Lbs (6.8 kg)

Standard Dimensions for 13/16" (21mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/32" (7mm); Hole Spacing - From End: 13/32" (10mm); Hole Spacing - On Center: 1 1/8" (27mm); Width: 13/16" (21mm); Thickness: 1/8" (3mm)




P6726A




Wt/100 pcs: 22 Lbs (10.0 kg)

P6334




Wt/100 pcs: 11 Lbs (5.0 kg)

P6380




Wt/100 pcs: 15 Lbs (6.8 kg)

P6036




Wt/100 pcs: 8 Lbs (3.6 kg)

P6380A




Wt/100 pcs: 11 Lbs (5.0 kg)

P6031




Wt/100 pcs: 11 Lbs (5.0 kg)

P6028




Wt/100 pcs: 14 Lbs (6.4 kg)

P6026




Wt/100 pcs: 5 Lbs (2.3 kg)

P6068




Wt/100 pcs: 5 Lbs (2.3 kg)

P6281, P6282, P6283




Part Number	A In (mm)	Wt/100 pcs Lbs (kg)
P6281	2	8
P6282	2½	9
P6283	3	10

P6069




Wt/100 pcs: 8 Lbs (3.6 kg)

P6326




Wt/100 pcs: 8 Lbs (3.6 kg)

P6346




Wt/100 pcs: 8 Lbs (3.6 kg)

P6458




Wt/100 pcs: 8 Lbs (3.6 kg)

P6325



Wt/100 pcs: 11 Lbs (5.0 kg)

P6033




Wt/100 pcs: 11 Lbs (5.0 kg)

Standard Dimensions for 13/16" (21mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/32" (7mm); Hole Spacing - From End: 13/32" (10mm); Hole Spacing - On Center: 1 1/16" (27mm); Width: 13/16" (21mm); Thickness: 1/8" (3mm)


15/16" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1/4" Framing System
 13/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P6037




Wt/100 pcs: 8 Lbs (3.6 kg)

P6038




Wt/100 pcs: 8 Lbs (3.6 kg)

P6357




Wt/100 pcs: 10 Lbs (4.5 kg)

P6359




Wt/100 pcs: 15 Lbs (6.8 kg)

P6579

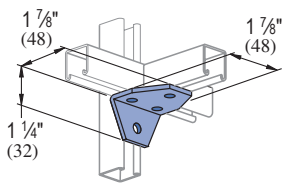


Wt/100 pcs: 15 Lbs (6.8 kg)

P6728

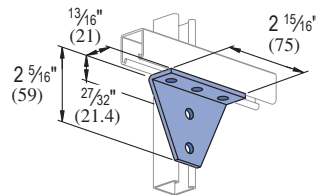


Wt/100 pcs: 22 Lbs (10.0 kg)

P6917

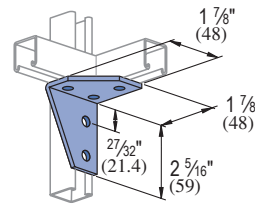


Wt/100 pcs: 21 Lbs (9.5 kg)

P6918

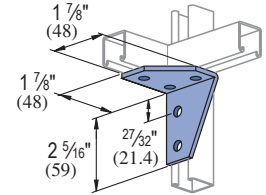


Wt/100 pcs: 21 Lbs (9.5 kg)

P7235

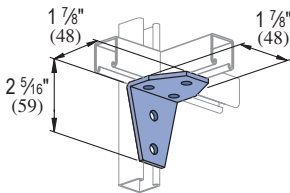


Wt/100 pcs: 18 Lbs (8.2 kg)

P6130

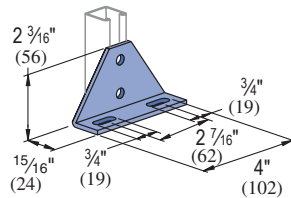


Wt/100 pcs: 32 Lbs (14.5 kg)

P6290




Wt/100 pcs: 15 Lbs (6.8 kg)

P6291




Wt/100 pcs: 15 Lbs (6.8 kg)

P6381




Wt/100 pcs: 15 Lbs (6.8 kg)

P6382




Wt/100 pcs: 15 Lbs (6.8 kg)

P6887



Wt/100 pcs: 28 Lbs (12.7 kg)

P6331




Wt/100 pcs: 19 Lbs (8.6 kg)

Standard Dimensions for 13/16" (21mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/32" (7mm); Hole Spacing - From End: 13/32" (10mm); Hole Spacing - On Center: 1 1/16" (27mm); Width: 13/16" (21mm); Thickness: 1/8" (3mm)




P6332



Wt/100 pcs: 19 Lbs (8.6 kg)


P6546, P7097, P7098, P7100, P7101



Wt/100 pcs: 8 Lbs (3.6 kg)


Part Number	A In (mm)	"B" In (mm)	"C" Deg (rad)
P7097	1 ⁵ / ₁₆ 24	1 ¹³ / ₁₆ 46	60° 1.1
P7098	1 ¹ / ₂ 26	1 ⁷ / ₈ 48	52 ¹ / ₂ ° 9.1
P6546	1 ³ / ₁₆ 30	1 ²³ / ₃₂ 44	45° 0.8
P7100	1 ⁵ / ₁₆ 33	1 ¹⁹ / ₃₂ 41	37 ¹ / ₂ ° 6.5
P7101	1 ¹ / ₂ 26	1 ⁷ / ₈ 48	30° 0.5

P6186, P7108, P7109, P7110




Part No.	"A" In (mm)	"C" Deg (rad)
P7108	1 ²⁷ / ₃₂ 47	60° 1.1
P7109	1 ¹³ / ₁₆ 46	52 ¹ / ₂ ° 9.1
P6186	1 ¹³ / ₁₆ 46	45° 0.8
P7110	1 ¹³ / ₁₆ 46	37 ¹ / ₂ ° 6.5

P6045




Wt/100 pcs: 7 Lbs (3.2 kg)

P7045




Wt/100 pcs: 6 Lbs (2.7 kg)

P6347




Wt/100 pcs: 7 Lbs (3.2 kg)

P7347




Wt/100 pcs: 6 Lbs (2.7 kg)

P6453

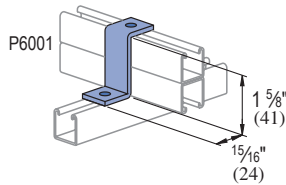


Wt/100 pcs: 9 Lbs (4.1 kg)

P6454




Wt/100 pcs: 5 Lbs (2.3 kg)

P6758




Wt/100 pcs: 13 Lbs (5.9 kg)

P7758




Wt/100 pcs: 12 Lbs (5.4 kg)

P6047, P7047




Part No.	A In (mm)	Wt/100 pcs Lbs (kg)	Use with Channel
P6047	1 ³ / ₁₆ 20.6	12 5.4	P6000
P7047	1 ³ / ₃₂ 10.3	10 4.5	P7000

P6737

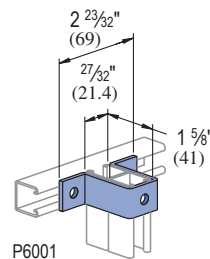

Wt/100 pcs: 16 Lbs (7.3 kg)

P6048




Wt/100 pcs: 14 Lbs (6.4 kg)

Standard Dimensions for 1³/₁₆" (21mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/32" (7mm); Hole Spacing - From End: 1³/₃₂" (10mm); Hole Spacing - On Center: 1¹/₁₆" (27mm); Width: 1³/₁₆" (21mm); Thickness: 1/8" (3mm)


1⁵/₈" Channel
 Telesnut System
 Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1¹/₄" Framing System
 1³/₁₆" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

P7048




Wt/100 pcs: 10 Lbs (4.5 kg)

P6376




Wt/100 pcs: 17 Lbs (7.7 kg)

P7376




Wt/100 pcs: 11 Lbs (5.0 kg)

P6376A




Wt/100 pcs: 26 Lbs (11.8 kg)

P7376A




Wt/100 pcs: 16 Lbs (7.3 kg)

P6377

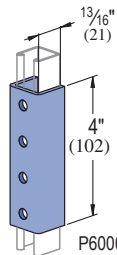


Wt/100 pcs: 36 Lbs (16.3 kg)

P7377




Wt/100 pcs: 24 Lbs (10.9 kg)

P6044

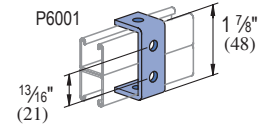


Wt/100 pcs: 9 Lbs (4.1 kg)

P6455




Wt/100 pcs: 8 Lbs (3.6 kg)

P6973



Wt/100 pcs: 8 Lbs (3.6 kg)


P6349

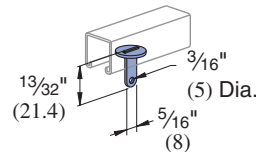

Wt/100 pcs: 1 Lbs (0.5 kg)

ACETAL SLIDE


P6353

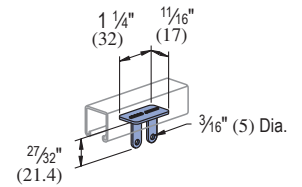

Wt/100 pcs: 1 Lbs (0.5 kg)

ACETAL SLIDE

P6127 - P6129



BRACKET

Part No.	Uniform Design Load Lbs (kN)	"A" In (mm)	"B" In (mm)	"C" In (mm)	Wt/100 pcs Lbs (kg)
P6127	150 0.67	6 1/2 165	2 1/2 64	2 1/2 64	30 13.6
P6128	150 0.67	8 1/2 216	3/4 83	3 1/2 89	40 18.1
P6129	130.0 0.58	10 1/2 267	4 102	4 1/2 114	50 22.7


Standard Dimensions for 1 3/16" (21mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 3/32" (2.4mm) Hole Spacing - From End: 1 3/32" (10mm); Hole Spacing - On Center: 1 1/16" (27mm); Width: 1 3/16" (21mm); Thickness: 1/8" (3mm)



P6386


Use in pairs.

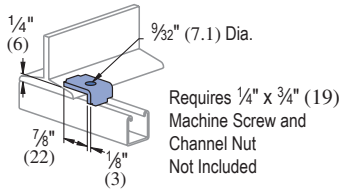

Wt/100 pcs: 4 Lbs (1.8 kg)

P6379 S

Use in pairs.



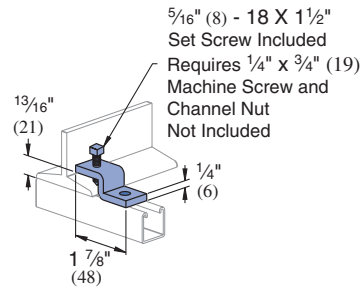


Wt/100 pcs: 13 Lbs (5.9 kg)

P7008 THRU P7020

TUBING CLIPS


P6805 THRU P6810

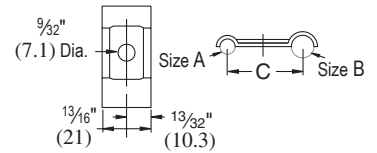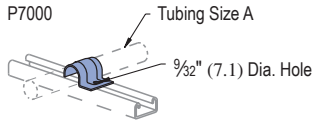

Material: 16 Gauge (1.5)

Part Number	O.D. Tube Size "A" In (mm)	Wt/100 pcs Lbs (kg)
P7008	1/4 6	1 0.45
P7009	5/16 8	1 0.45
P7010	3/8 10	2 0.91
P7012	1/2 13	2 0.91
P7014	5/8 16	3 1.4
P7016	3/4 19	4 1.8
P7018	7/8 23	5 2.3
P7020	1 25	5 2.3

Part Number	O.D. Tube Size "A" In (mm)	O.D. Tube Size "B" In (mm)	"C" In (mm)	Wt/100 pcs Lbs (kg)
P6805	1/4 6	1/4 6	3/4 19	1 0.5
P6806	3/8 10	3/8 10	1 25	2 0.9
P6807	1/2 13	1/2 13	1 1/4 32	3 1.4
P6808	1/4 6	3/8 10	7/8 22	2 0.9
P6809	1/4 6	1/2 13	1 25	2 0.9
P6810	3/8 10	1/2 13	1 1/8 29	3 1.4

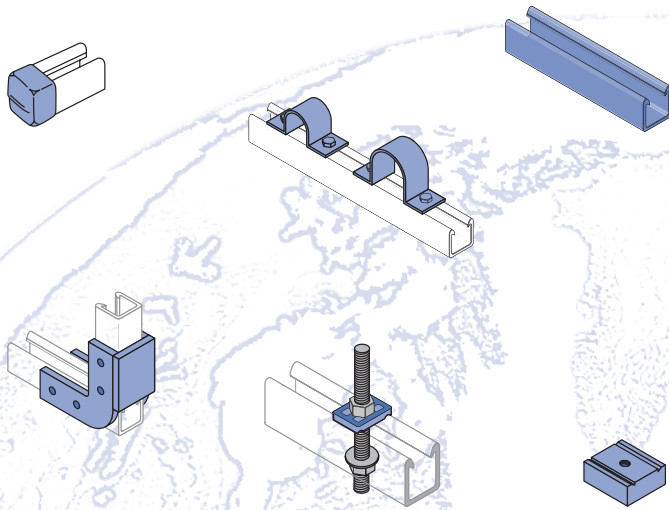

Heavy Duty Channel (Flange Profile) 169

Light Duty Channel (Flange Profile) 170

Heavy Duty Channel (SST Profile)..... 171

Nuts & Hardware 172-174

Fittings..... 175-176

Pipe Clamps 177

Clevis Hangers..... 178

Beam Clamps..... 179

Power Rack Stanchions 179

Chemical Compatibility 180-181

Specifications 182

POLYESTER AND VINYL ESTER MATERIALS

Polyester and vinyl ester channels are manufactured from the pultrusion process and are color coded gray and beige respectively. Components are made by reinforcing a polymer resin (polyester or vinyl ester) with multiple strands of glass filament, alternating layers of glass mat and U.V. resistant surfacing veils. The glass is drawn through the liquid resin, which coats and saturates the fibers. The combination of resin, glass and veil is then continuously guided and pulled (pultruded) through a heated die that determines the shape of the component.

In the die, the resin is cured to form a reinforced part which can be cut to length. The hardened fiberglass pultrusion is reinforced with an internal arrangement of permanently bonded continuous glass fibers to increase its strength.

INSTALLATION

Fabrication requires just three simple operations: cutting, drilling and sealing as described below.

Cutting – Hand held saws, such as hack saws (24 to 32 teeth per inch) are suitable when a few cuts are required. For frequent cutting, a circular power saw with a carbide-tipped masonry blade yields the best results. When using a power saw, dust filter masks, gloves and long sleeve clothing should be worn.

Drilling – Any standard twist bit, even when used with battery-powered drills will work well. Carbide-tipped drill bits are recommended.

Sealing – To protect against future migration of corrosive elements into the cut sections, all cuts and holes should be properly sealed with clear urethane sealer.

OPERATING ENVIRONMENT

Temperature Ranges – Fiberglass parts are supplied in five different materials covering distinct temperature ranges. The temperature ranges indicated are meant to be used only as a general guideline. Continual exposure to elevated temperatures reduces the strength properties of plastics and glass-reinforced fiberglass. Actual resin test data confirms that a 50% reduction in strength occurs at the extreme high temperature levels.

Chemical Resistance – See the chart on page 269 for corrosion resistance. The results are based upon immersion for a 24 hour period. This is typically the “worst case” exposure to corrosion. Less severe contact such as spills, splashes and vapor condensate will exceed the performance results listed in the table.

Loading – Channel loading is defined with description of each type of channel. Additional loading and design limitations for fittings and accessories are described in the appropriate section for that part.


Material Temperature Ratings		
Material Code	Low Temp.	High Temp.
E - (Rigid PVC)	-25°F (-31°C)	130°F (54°C)
P - (Poly/Glass)	-35°F (-37°C)	200°F (93°C)
V - (Vinyl/Glass)	-35°F (-37°C)	200°F (93°C)
PU - (Poly)	-40°F (-40°C)	140°F (60°C)
N - (Nylon)	-20°F (-29°C)	150°F (66°C)




Channel - Patented Flange Profile

Unistrut fiberglass channels, except the SST series, incorporate a patented flange design which provides reliable fastening and interlocking of components and accessories. It is important to note that standard metal framing components such as pipe clamps and strut nuts will not work with the flange design.

Heavy Duty Patented Flange Profile
1 5/8" x 1 5/8"

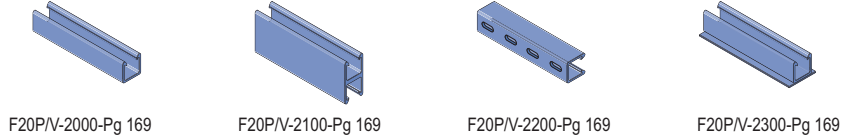


Light Duty Patented Flange Profile
1 1/2" x 1 1/8"

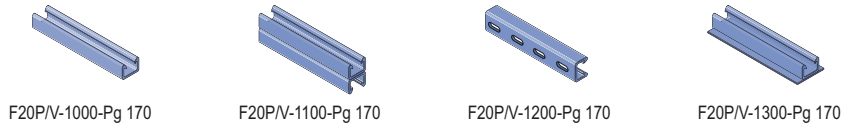


Channel - SST Profile

The Unistrut SST profile is similar to the profile of standard metal channel. The Unistrut SST profile will accommodate standard 1 5/8" metal channel fittings and components. This profile is available in polyester or vinyl ester resin. The Unistrut SST profile is not compatible with the fiberglass pipe clamps and channel nuts shown in this section. Typically, stainless steel clamps and strut nuts (listed elsewhere in this catalog) are used with this profile.


Heavy Duty SST Profile
1 5/8" x 1 5/8"

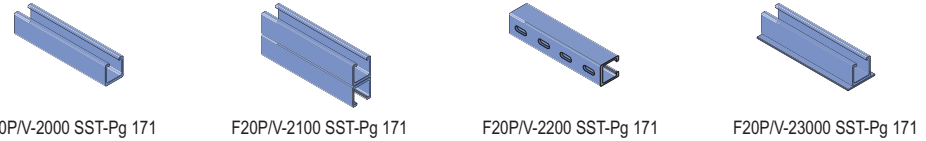


Hardware & Accessories

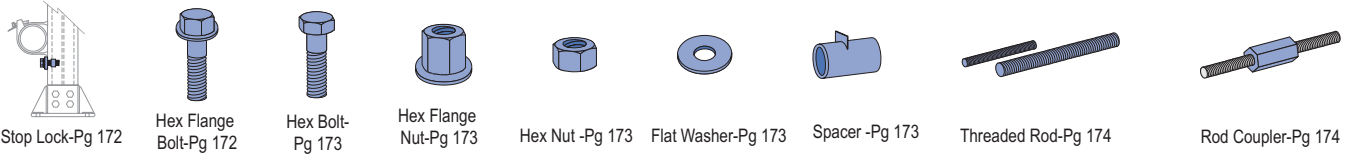

Fittings

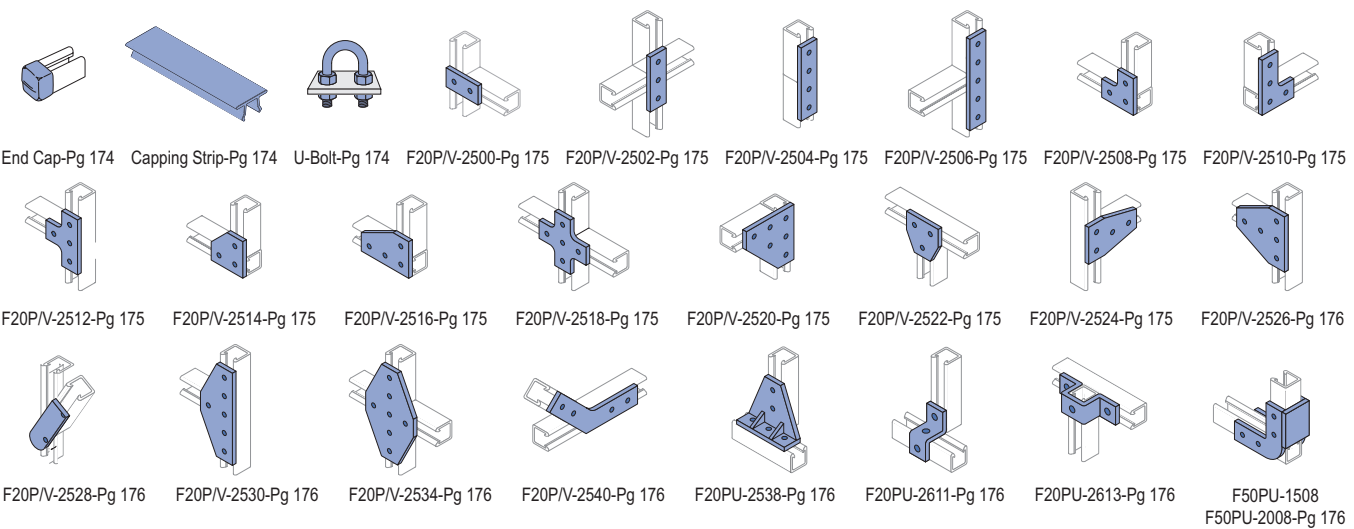



Pipe Clamps, Beam Clamps and Stanchions

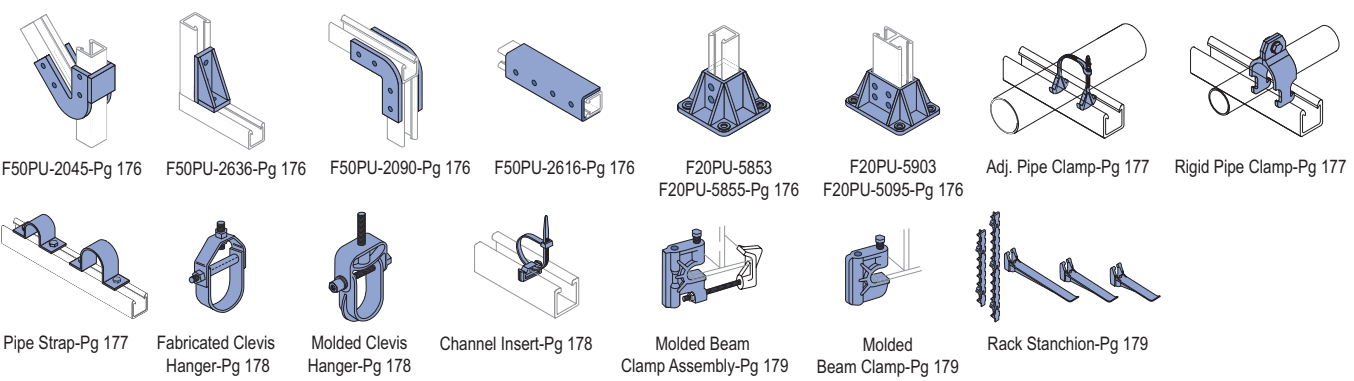

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

F20P-2000, F20V-2000



HEAVY DUTY SINGLE CHANNEL - PATENTED FLANGE PROFILE



Wt/100 Ft: 82 Lbs(122 kg/100 m)

F20P-2100, F20V-2100

HEAVY DUTY BACK-TO-BACK CHANNEL - PATENTED FLANGE PROFILE

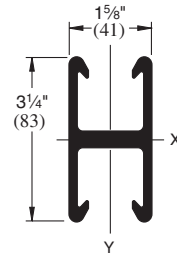


Wt/100 Ft: 164 Lbs (244 kg/100 m)

SECTION PROPERTIES

Part Number	Weight lbs./ft. (kg/m)	Area in ² (mm ²)	----- X - X Axis -----				----- Y - Y Axis -----		
			I in ⁴ (mm ⁴)	R ln (mm)	C1 ln (mm)	C2 ln (mm)	I in ⁴ (mm ⁴)	R ln (mm)	C ln (mm)
F20P-2000, F20V-2000	0.82	1.06	0.31	0.54	0.7	0.93	0.42	0.63	0.82
F20P-2100, F20V-2100	1.2	6.8	12.9	13.7	17.8	23.622	17.5	16.0	20.8
F20P-2000, F20V-2000	1.64	2.12	1.77	0.91	1.63	1.63	0.85	0.63	0.82
F20P-2100, F20V-2100	2.4	13.7	73.7	23.1	41.4	41.402	35.4	16.0	20.8

FLANGE LOADING

Part Number	Pull-Out Strength* Lbs (kN)
F20V-2000/2100	449 2.0
F20P-2000/2100	360 1.6




*Values shown represent a 3:1 safety factor

F20P-2200, F20V-2200

SLOTTED CHANNEL



Slots are 1" (25) x 7/16" (11)
2" (51) on Center



Wt/100 Ft: 82 Lbs (122 kg/100 m)

F20P-2300, F20V-2300

W/CONCRETE INSERT

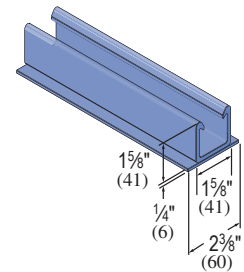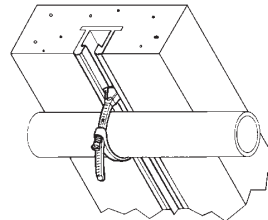

Wt/100 Ft: 88 Lbs (131 kg/100 m)

F20P-2000, F20V-2000

CHANNEL BEAM/COLUMN LOADING

Span ln (mm)	Max. Uniform Beam Load (Safety Factor - 3:1)		Uniform Load at Deflection of 1/360 Span		Maximum Column Load Lbs (kN)
	Load Lbs (kN)	Deflection ln (mm)	Load Lbs (kN)	Deflection ln (mm)	
12	3,561	0.102	1,159	0.033	5,160
305	15.8	2.6	5.2	0.8	23.0
18	2,374	0.23	515	0.05	4,704
457	10.6	5.8	2.3	1.3	20.9
24	1,781	0.41	290	0.067	4,168
610	7.9	10.4	1.3	1.7	18.5
30	1,424	0.64	185	0.083	3,553
762	6.3	16.3	0.8	2.1	15.8
36	1,187	0.922	129	0.1	2,859
914	5.3	23.4	0.6	2.5	12.7
48	890	1.638	72	0.133	1,636
1,219	4.0	41.6	0.3	3.4	7.3
60	712	2.56	46	0.167	1,047
1,524	3.2	65	0.2	4.2	4.7
72	594	3.686	32	0.2	727
1,829	2.6	93.6	0.1	5.1	3.2

F20P-2100, F20V-2100



CHANNEL BEAM/COLUMN LOADING

Span ln (mm)	Max. Uniform Beam Load (Safety Factor - 3:1)		Uniform Load at Deflection of 1/360 Span		Maximum Column Load Lbs (kN)
	Load Lbs (kN)	Deflection ln (mm)	Load Lbs (kN)	Deflection ln (mm)	
12	5,559	0.028	5,559	0.033	9,454
305	24.7	0.7	24.7	0.8	42.1
18	3,706	0.064	2,914	0.05	8,866
457	16.5	1.6	13.0	1.3	39.4
24	2,780	0.113	1,639	0.067	8,181
610	12.4	2.9	7.3	1.7	36.4
30	2,224	0.177	1,049	0.083	7,405
762	9.9	4.5	4.7	2.1	32.9
36	1,853	0.254	730	0.1	6,451
914	8.2	6.5	3.2	2.5	28.7
48	1,390	0.452	410	0.133	4,534
1,219	6.2	11.5	1.8	3.4	20.2
60	1,112	0.707	262	0.167	2,902
1,524	4.9	18.0	1.2	4.2	12.9
72	927	1.018	182	0.2	2,015
1,829	4.1	25.9	0.8	5.1	9.0



F20P-1000, F20V-1000



LIGHT DUTY SINGLE CHANNEL - PATENTED FLANGE PROFILE



Wt/100 Ft: 47 Lbs (70 kg/100 m)

F20P-1100, F20V-1100

LIGHT DUTY BACK-TO-BACK CHANNEL - PATENTED FLANGE PROFILE



Wt/100 Ft: 94 Lbs (140 kg/100 m)

SECTION PROPERTIES

Part Number	Weight lbs./ft. (kg/m)	Area in ² (mm ²)	X - X Axis			Y - Y Axis			
			I in ⁴ (mm ⁴)	R In (mm)	C1 In (mm)	C2 In (mm)	I in ⁴ (mm ⁴)	R In (mm)	C In (mm)
F20P-1000, F20V-1000	0.47	0.61	0.1	0.4	0.51	0.62	0.22	0.6	0.75
F20P-1100, F20V-1100	0.94	1.22	0.42	0.59	1.13	1.13	0.44	0.6	0.75
	1.4	7.9	17.5	15	29	28	18.3	15	19.1

FLANGE LOADING

Part Number	Pull-Out Strength* Lbs (kN)
F20V-1000/1100	213 (1.0)
F20P-1000/1100	213 (1.0)


FLANGE LOAD



*Values shown represent a 3:1 safety factor

F20P-1200, F20V-1200

SLOTTED CHANNEL





Slots are 1" (25) x 7/16" (11)
2" (51) on Center

Wt/100 Ft: 47 Lbs (70 kg/100 m)

F20P-1300, F20V-1300

W/CONCRETE INSERT

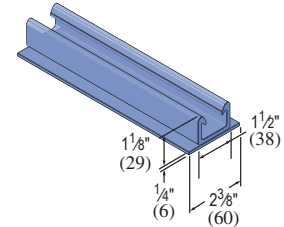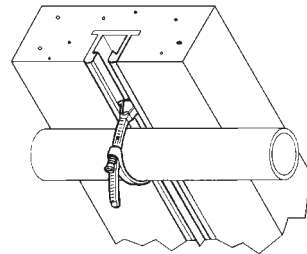

Wt/100 Ft: 53 Lbs (79 kg/100 m)

F20P-1000, F20V-1000

CHANNEL BEAM/COLUMN LOADING

Span In (mm)	Max. Uniform Beam Load (Safety Factor - 3:1)		Uniform Load at Deflection of 1/360 Span		Maximum Column Load Lbs (kN)
	Load Lbs (kN)	Deflection In (mm)	Load Lbs (kN)	Deflection In (mm)	
12	1,629	0.151	359	0.033	2,759
305	7.2	3.8	1.6	0.8	12.3
18	1,086	0.340	160	0.050	2,351
457	4.8	8.6	0.7	1.3	10.5
24	815	0.605	90	0.067	1,862
610	3.6	15.4	0.4	1.7	8.3
30	652	0.945	57	0.083	1,298
762	2.9	24.0	0.3	2.1	5.8
36	543	1.360	40	0.100	901
914	2.4	34.5	0.2	2.5	4.0
48	407	2.418	22	0.133	507
1,219	1.8	61.4	0.1	3.4	2.3
60	326	3.779	14	0.167	324
1,524	1.5	96.0	0.1	4.2	1.4
72	272	5.441	10	0.200	225
1,829	1.2	138.2	0.0	5.1	1.0


F20P-1100, F20V-1100

CHANNEL BEAM/COLUMN LOADING

Span In (mm)	Max. Uniform Beam Load (Safety Factor - 3:1)		Uniform Load at Deflection of 1/360 Span		Maximum Column Load Lbs (kN)
	Load Lbs (kN)	Deflection In (mm)	Load Lbs (kN)	Deflection In (mm)	
12	3,804	0.082	1,556	0.033	5,961
305	16.9	2.1	6.9	0.8	26.5
18	2,536	0.183	691	0.05	5,509
457	11.3	4.6	3.1	1.3	24.5
24	1,902	0.326	389	0.067	4,979
610	8.5	8.3	1.7	1.7	22.1
30	1,522	0.509	249	0.083	4,375
762	6.8	12.9	1.1	2.1	19.5
36	1,268	0.734	173	0.1	3,698
914	5.6	18.6	0.8	2.5	16.4
48	951	1.304	97	0.133	2,254
1,219	4.2	33.1	0.4	3.4	10.0
60	761	2.038	62	0.167	1,442
1,524	3.4	51.8	0.3	4.2	6.4
72	634	2.935	43	0.2	1,001
1,829	2.8	74.5	0.2	5.1	4.5


1 1/2" Channel
 Telesnut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

F20P-2000 SST, F20V-2000 SST
HEAVY DUTY SINGLE CHANNEL - SST PROFILE

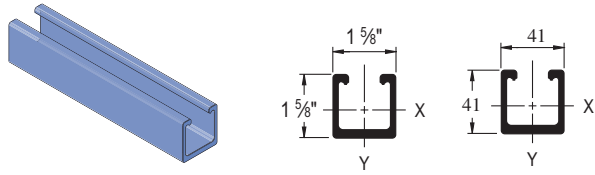


Wt/100 Ft: 82 Lbs (122 kg/100 m)

F20P-2100 SST, F20V-2100 SST
HEAVY DUTY BACK-TO-BACK CHANNEL - SST PROFILE

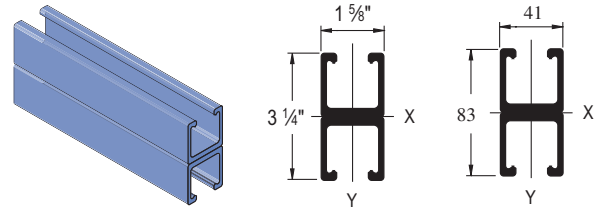


Wt/100 Ft: 164 Lbs (244 kg/100 m)

F20P-2200 SST, F20V-2200 SST **SLOTTED CHANNEL**

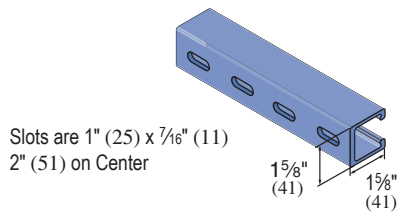

Wt/100 Ft: 82 Lbs (122 kg/100 m)

F20P-2300 SST, F20V-2300 SST **w/CONCRETE INSERT**

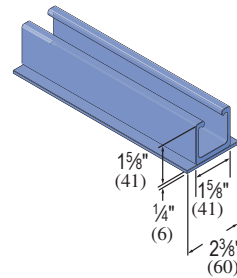

Wt/100 Ft: 88 Lbs (131 kg/100 m)

NOTE: Unistrut SST Channel is not compatible with the Unistrut fiberglass pipe clamps and channel nuts shown in this catalog. Metal clamps and channel nuts are compatible with this profile and are shown elsewhere in this catalog.

F20P-2000 SST, F20V-2000 SST
CHANNEL BEAM/COLUMN LOADING


Span In (mm)	Maximum Uniform Beam Load (Safety Factor - 3:1)		Deflection @ Max. Allowable Beam Load		Deflection @ Max. Deflection = 0.25 In (Lbs)		Uniform Load @ Max. Deflection = 0.50 In (Lbs)		Max. Column Load Lbs (kN)
	Poly Lbs (kN)	Vinyl Lbs (kN)	Poly In (mm)	Vinyl In (mm)	Poly Lbs (kN)	Vinyl Lbs (kN)	Poly Lbs (kN)	Vinyl Lbs (kN)	
12	1,720	2,150	0.07	0.07	—	—	—	—	3,650
305	7.6	9.6	1.8	1.8	—	—	—	—	16.2
18	1,150	1,440	0.15	0.17	—	—	—	—	3,370
457	5.1	6.4	3.8	4.3	—	—	—	—	15.0
24	860	1,080	0.27	0.3	810	910	—	—	2,960
610	3.8	4.8	6.9	7.6	3.6	4.0	—	—	13.2
30	690	870	0.42	0.48	410	460	—	—	2,450
762	3.1	3.9	10.7	12.2	1.8	2.0	—	—	10.9
36	580	730	0.61	0.69	240	270	480	540	1,800
914	2.6	3.2	15.5	17.5	1.1	1.2	2.1	2.4	8.0
48	430	540	1.07	1.2	100	115	200	230	1,010
1,219	1.9	2.4	27.2	30.5	0.4	0.5	0.9	1.0	4.5
60	350	440	1.7	1.91	60	70	120	135	260
1,524	1.6	2.0	43.2	48.5	0.3	0.3	0.5	0.6	1.2
72	290	370	2.44	2.78	30	34	60	70	NR
1,829	1.3	1.6	62.0	70.6	0.1	0.2	0.3	0.3	NR

F20P-2100 SST, F20V-2100 SST
CHANNEL BEAM/COLUMN LOADING

Span In (mm)	Maximum Uniform Beam Load (Safety Factor - 3:1)		Deflection @ Max. Allowable Beam Load		Deflection @ Max. Deflection = 0.25 In (Lbs)		Uniform Load @ Max. Deflection = 0.50 In (Lbs)		Max. Column Load Lbs (kN)
	Poly Lbs (kN)	Vinyl Lbs (kN)	Poly In (mm)	Vinyl In (mm)	Poly Lbs (kN)	Vinyl Lbs (kN)	Poly Lbs (kN)	Vinyl Lbs (kN)	
12	5,080	6,350	0.04	0.04	—	—	—	—	7,300
305	22.6	28.2	1.0	1.0	—	—	—	—	32.5
18	3,390	4,240	0.09	0.1	—	—	—	—	6,740
457	15.1	18.9	2.3	2.5	—	—	—	—	30.0
24	2,540	3,180	0.16	0.17	—	—	—	—	5,920
610	11.3	14.1	4.1	4.3	—	—	—	—	26.3
30	2,040	2,550	0.24	0.27	—	2,350	—	—	4,900
762	9.1	11.3	6.1	6.9	—	10.5	—	—	21.8
36	1,700	2,130	0.35	0.39	1,220	1,370	—	—	3,600
914	7.6	9.5	8.9	9.9	5.4	6.1	—	—	16.0
48	1,270	1,590	0.62	0.69	520	590	1,040	1,170	2,020
1,219	5.6	7.1	15.7	17.5	2.3	2.6	4.6	5.2	9.0
60	1,020	1,280	0.97	1.09	270	310	540	610	520
1,524	4.5	5.7	24.6	27.7	1.2	1.4	2.4	2.7	2.3
72	850	1,070	1.4	1.57	160	180	320	360	NR
1,829	3.8	4.8	35.6	39.9	0.7	0.8	1.4	1.6	NR



HEAVY DUTY CHANNEL NUTS




- Heavy duty channel nuts are designed to be used where high thread shear values or spring nuts are required. They can not be used with light duty 1000 series channel or SST profile channel.
- Material: glass-reinforced polyurethane.

Part Number	Size	Thread Shear Lbs (kN)*	Torque Ft/Lbs (N•m)	Wt/100 pcs Lbs (kg)
F375PU-CNHD	3/8"-16	1,400	8	5.7
		6.23	11	2.6
F500PU-CNHD	1/2"-13	1,400	8	5.3
		6.23	11	2.4
F625PU-CNHD	5/8"-11	1,400	10	5.1
		6.23	14	2.3
F750PU-CNHD	3/4"-10	1,400	10	4.4
		6.23	14	2.0
F10PU-CNMHD	10 mm	1,400	8	5.8
		6.23	11	2.6
F12PU-CNMHD	12 mm	1,400	8	5.5
		6.23	11	2.5
F16PU-CNMHD	16 mm	1,400	10	5.3
		6.23	14	2.4
F20PU-CNMHD	20 mm	1,400	10	4.4
		6.23	14	2.0

*Thread shear values shown represent a 3:1 safety factor.


SADDLE CLIPS

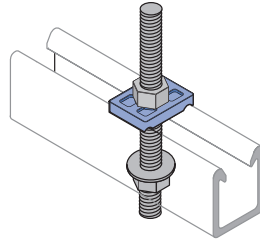

Saddle clips mate with the exterior of the channel flanges and are secured with threaded rods and nuts. Material: glass-reinforced polyurethane.

Part Number	Size (In.)	Wt/100 pcs Lbs (kg)
F200-4226	3/8"	3.5
		1.6
F200-4217	1/2"	2.5
		1.1
F200-4341	5/8"	3.0
		1.4
F200-4342	3/4"	2.5
		1.1

STOP-LOCK ASSEMBLIES

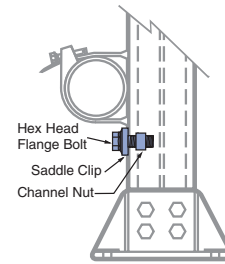

Stop-Lock Assemblies reduce the chance of pipe slippage when running supports vertically and are recommended for applications that are subject to vibration, have regular contact with fluids or are vertically mounted. The Stop-Locks fit both sizes of channel.


Material: glass-reinforced polyurethane.

Part Number	Size (in.)	Force Resistance Lbs (kN)*	Torque Ft/Lbs (N•m)	Wt/100 pcs Lbs (kg)
F200-4227	3/8"	200	7	6.3
		0.9	9	2.9
F200-4219	1/2"	220	12	6.4
		1.0	16	2.9
F200-4343	5/8***	250	15	11.0
		1.1	20	5.0

* Force resistance values shown represents a 3:1 safety factor.

** Supplied with a heavy duty channel nut for use only with the heavy duty series 2000 channel.

STANDARD DUTY CHANNEL NUTS




Standard Duty channel nuts are designed for light duty applications that do not require high thread shear values. They can be used with both light duty series 1000 and heavy duty series 2000 fiberglass channel. Not for use with SST profile channel. Material: glass-reinforced polyurethane.

Part Number	Size	Thread Shear Lbs (kN)*	Torque Ft/Lbs (N•m)	Wt/100 pcs Lbs (kg)
F250PU-CN	1/4"-20	460	2	1.8
		2.05	3	0.8
F312PU-CN	5/16"-18	460	2	1.7
		2.05	3	0.8
F375PU-CN	3/8"-16	460	3	1.8
		2.05	4	0.8
F500PU-CN	1/2"-13	460	3	1.4
		2.05	4	0.6
F10PU-CN	10 mm	460	3	1.7
		2.05	4	0.8
F12PU-CN	12 mm	460	3	1.4
		2.05	4	0.6
F10PU-CNS	#10 Screw	460	N/A	1.9
		2.05		0.9

*Thread shear values shown represent a 3:1 safety factor.

HEX FLANGE BOLTS




Fiberfast bolts are ideal for mechanical connections that require a high degree of corrosion resistance. The 3/8" diameter fasteners are recommended for all channel fitting mechanical connections. Material: glass-reinforced polyurethane.

Part Number	Size (in.)	Thread Shear Lbs (kN)*	Shank Shear Lbs (kN)*	Shoulder Length In (mm)	Torque Ft/Lbs (N•m)	Wt/100 pcs Lbs (kg)
F250PU-075	1/4 x 3/4	110	210	Full Thread	0.8	.4
		0.49	0.93		1	0.2
F250PU-100	1/4 x 1	110	210	Full Thread	0.8	.5
		0.49	0.93		1	.02
F250PU-150	1/4 x 1 1/2	110	210	1/2	0.8	.6
		0.49	0.93	13	1	0.3
F500PU-125	1/2 x 1 1/4	450	870	Full Thread	8	1.0
		2.00	3.87		11	0.5
F500PU-150	1/2 x 1 1/2	450	870	Full Thread	8	1.1
		2.00	3.87		11	.05
F500PU-200	1/2 x 2	450	870	3/4	8	1.3
		2.00	3.87	19	11	0.6
F500PU-250	1/2 x 2 1/2	450	870	Full Thread	8	1.6
		2.00	3.87		11	0.7
F500PU-300	1/2 x 3	450	870	1	8	1.8
		2.00	3.87	25	11	0.8
F500PU-350	1/2 x 3 1/2	450	870	2 3/16	8	2.0
		2.00	3.87	56	11	0.9

*Thread shear values shown represent a 3:1 safety factor.

15/16" Channel
 Telesnut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

HEX BOLTS



Fiberfast bolts are ideal for mechanical connections that require a high degree of corrosion resistance. The 3/8" diameter fasteners are recommended for all channel fitting mechanical connections. Material: glass-reinforced polyurethane.


Part Number	Size (in.)	Thread Shear Lbs (kN)*	Shank Shear Lbs (kN)*	Shoulder Length In (mm)	Torque Ft/Lbs (N·m)	Wt/100 pcs Lbs (kg)
F375PU-125	3/8 x 1 1/4	250 1.11	470 2.09	Full Thread	3 4	1.0 0.5
F375PU-150	3/8 x 1 1/2	250 1.11	470 2.09	1/4	3 4	1.1 0.5
F375PU-200	3/8 x 2	250 1.11	470 2.09	1/2	3 4	1.3 0.6
F375PU-250	3/8 x 2 1/2	250 1.11	470 2.09	3/4	3 4	1.6 0.7
F375PU-300	3/8 x 3	250 1.11	470 2.09	1	3 4	1.8 0.8
F625PU-125	5/8 x 1 1/4	700 3.11	1,360 6.05	1/4	12 16	2.5 1.1
F625PU-150	5/8 x 1 1/2	700 3.11	1,360 6.05	1/4	12 16	2.8 1.3
F625PU-200	5/8 x 2	700 3.11	1,360 6.05	1/4	12 16	3.2 1.5
F625PU-250	5/8 x 2 1/2	700 3.11	1,360 6.05	1/4	12 16	3.4 1.5
F625PU-300	5/8 x 3	700 3.11	1,360 6.05	1/4	12 16	3.9 1.8
F625PU-350	5/8 x 3 1/2	700 3.11	1,360 6.05	1 1/4	12 16	5.5 2.5

*Thread shear values shown represent a 3:1 safety factor.

FLAT WASHERS


Material: PVC

Note: PVC washers are recommended for connections that utilize hex nuts and bolts.



Part Number	Size (in.)	Outside Diameter In (mm)	Wt/100 pcs Lbs (kg)
F250E-999	1/4	0.49 12	0.1 0.05
F375E-999	3/8	1.00 25	0.1 0.05
F500E-999	1/2	1.25 32	0.5 0.2
F625E-999	5/8	1.50 38	0.5 0.2
F750E-999	3/4	1.50 38	1.0 0.5
F1000E-999	1	2.25 57	1.5 0.7

HEX FLANGE NUTS




The hex flange nut is preferred for applications that require additional thread engagement (such as with all-thread rod) or maximum thread shear strength. Material: glass-reinforced polyurethane.

Part Number	Size (in.)	Thread Shear Lbs (kN)*	Height In (mm)	Torque Ft/Lbs (N·m)	Wt/100 pcs Lbs (kg)
F375PU-FN-000	3/8-16	500 2.22	0.750 19.1	3 4	0.8 0.4
F500PU-FN-000	1/2-13	1,200 5.34	0.855 21.7	8 11	1.6 0.7
F625PU-FN-000	5/8-11	2,200 9.79	1.220 31.0	12 16	3.5 1.6
F750PU-FN-000	3/4-10	2,900 12.90	1.590 40.4	15 20	5.5 2.5

*Thread shear values shown represent a 3:1 safety factor.

HEX NUTS




Part Number	Size (in.)	Thread Shear Lbs (kN)*	Height In (mm)	Torque Ft/Lbs (N·m)	Wt/100 pcs Lbs (kg)
F250PU-000	1/4-20	150 0.67	0.218 5.5	0.8 1	0.1 0.05
F375PU-000	3/8-16	460 2.05	0.328 8.3	3 4	0.3 0.1
F500PU-000	1/2-13	800 3.56	0.437 11.1	8 11	0.5 0.2
F625PU-000	5/8-11	1,000 4.45	0.546 13.9	12 16	1.5 0.7

*Thread shear values shown represent a 3:1 safety factor.

F50PU-500SP


CHANNEL SPACERS



Channel spacers are designed to prevent wall compression under heavy loading conditions. Such loading occurs during the torquing of hardware for channel fittings.

The spacers are designed to be used only with 1 5/8" channels and will accommodate 3/8" and 1/2" bolts.


Material: molded from polyurethane

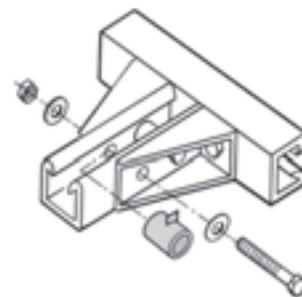

Wt/100 pcs: 2.0 Lbs (.91 kg)



THREADED ROD

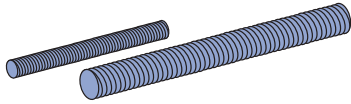


Material: pultruded vinyl ester resin and is gray in color.

* Thread shear values shown represent a 3:1 safety factor.
 ** Standard lengths are 4' and 8'. The part number shown is for 4' lengths. To order eight foot lengths, add suffix "-96" to part number (Example: F200-3827-96)

Part Number	Size (in.)	Weight Lbs (kg)	Thread Shear Lbs (kN)*	Torque Ft/Lbs (N•m)	Wt/100 pcs 4' in Len. Lbs (kg)
F200-3827	3/8-16	0.07 0.03	415 1.85	5 7	35 15.9
F200-3828	1/2-13	0.12 0.05	570 2.54	10 14	57 25.9
F200-3829	5/8-11	0.18 0.08	1,260 5.60	40 54	91 41.3
F200-3830	3/4-10	0.28 0.13	1,700 7.56	50 68	133 60.3
F200-3831	1-8	0.50 0.23	3,000 13.34	60 81	200 90.7

A-KONNECTOR ROD COUPLERS


A-Konnectors provide an excellent means for extending FRP all-thread rods beyond their standard lengths. A-Konnectors are manufactured from glass-reinforced polyurethane and are colored gray. A-Konnectors are packaged in bags containing 25 pieces.

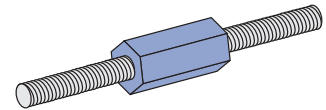

Part Number	Size (in.)	Length In (mm)	Thread Shear Lbs (kN)*	Wt/100 pcs Lbs (kg)
F200-3840	3/8-16	2 1/4 57	800 3.56	6.5 2.9
F200-3841	1/2-13	2 1/4 57	870 3.87	6.0 2.7
F200-3842	5/8-11	2 1/4 57	1,500 6.67	13.0 5.9
F200-3843	3/4-10	2 1/4 57	1,500 6.67	11.0 5.0

* Thread shear values shown represent a 3:1 safety factor.


FAIC-EC – CHANNEL END CAP



Material: red PVC and designed for 1 1/2" channel. End caps are desired when the ends of the channel need to be enclosed. The cap easily installs by pressing it onto the end of the channel opening.

Wt/100 pcs: 3.4 Lbs (1.5 kg)

F20E-5000 – CHANNEL CAPPING STRIP

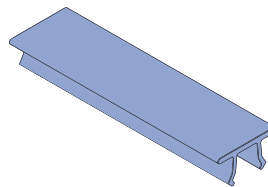



Material: PVC
 Installs simply by pressing it onto the channel opening. It is designed to be used when a cover is desired for the channel opening (such as concrete embedment channel).

Supplied in 10 foot lengths.



Wt/100 Ft: 5 Lbs (7.4 kg/100 m)

NONMETALLIC U-BOLTS



Note: Plate not included. Illustration purpose only

*Torque and load values shown represent a 3:1 safety factor.

Part Number	Size In	"A" Dim. In (mm)	"B" Dim. In (mm)	"C" Dim. In (mm)	"D" Dim. In (mm)	"TL" Dim. In (mm)	Load Lbs (kN)*	Torque In/Lbs (N•m)	Wt/100 pcs Lbs (kg)
FUB-050	1/2	0.937 23.8	0.375 9.5	1.568 39.8	2.412 61.3	1.25 31.8	135 0.60	40 5	3 1.4
FUB-075	3/4	1.125 28.6	0.375 9.5	1.662 42.2	2.600 66.0	1.25 31.8	135 0.60	40 5	3 1.4
FUB-100	1	1.375 34.9	0.375 9.5	1.787 45.4	2.850 72.4	1.25 31.8	135 0.60	40 5	4 1.8
FUB-125	1 1/4	1.687 42.8	0.375 9.5	1.943 49.4	3.162 80.3	1.25 31.8	135 0.60	40 5	4 1.8
FUB-150	1 1/2	2.000 50.8	0.375 9.5	2.100 53.3	3.475 88.3	1.25 31.8	135 0.60	40 5	5 2.3
FUB-200	2	2.437 61.9	0.500 12.7	2.468 62.7	4.187 106.3	1.50 38.1	135 0.60	80 9	10 4.5
FUB-250	2 1/2	2.937 74.6	0.500 12.7	2.718 69.0	4.687 119.0	1.50 38.1	135 0.60	80 9	11 5.0
FUB-300	3	3.562 90.5	0.500 12.7	3.031 77.0	5.312 134.9	1.50 38.1	135 0.60	80 9	14 6.4
FUB-350	3 1/2	4.062 103.2	0.500 12.7	3.281 83.3	5.812 147.6	1.50 38.1	135 0.60	80 9	15 6.8
FUB-400	4	4.562 115.9	0.500 12.7	3.531 89.7	6.312 160.3	1.50 38.1	135 0.60	80 9	16 7.3
FUB-600	6	6.750 171.5	0.625 15.9	5.750 146.1	9.875 250.8	3.25 82.6	135 0.60	120 14	17 7.7

- Unistrut Nonmetallic U-Bolts provide a corrosion resistant alternative to traditional metallic U-Bolts. They have oversized diameters which allow them to hold steel conduit and plastic pipe. These bolts will outlast stainless steel in most corrosive applications.
- Each U-Bolt comes with two polyurethane hex nuts. Additional nuts and washers can be purchased separately.
- Material: glass-reinforced polyurethane

1 1/2" Channel
 Telestrut System
 Hardware
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/8" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

CHANNEL FITTINGS



Channel Fittings are required to fabricate structures and are easily attached to Channels with channel nuts and polyurethane fasteners. The fittings are offered in two types; fabricated (cut from flat stock) or molded.

Material (Fabricated Fittings):


Either polyester (P Series) or vinyl ester (V Series) material.

Material (Molded Fittings): All molded fittings with the exception of the post bases are molded in polyurethane.

Note: The drawings for all fittings are shown with the patented flange profile, however they can be used with either channel profile.

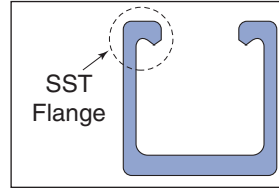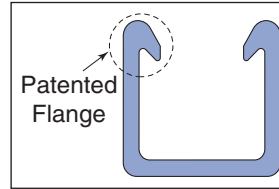


F20P-2500, F20V-2500




Wt/100 pcs: 12 Lbs (5.4 kg)

F20P-2502, F20V-2502

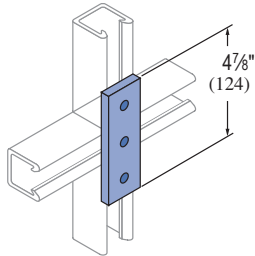


Wt/100 pcs: 17 Lbs (7.7 kg)

F20P-2504, F20V-2504




Wt/100 pcs: 24 Lbs (10.9 kg)

F20P-2506, F20V-2506

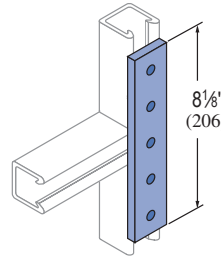


Wt/100 pcs: 32 Lbs (14.5 kg)

F20P-2508, F20V-2508




Wt/100 pcs: 17 Lbs (7.7 kg)

F20P-2510, F20V-2510




Wt/100 pcs: 25 Lbs (11.3 kg)

F20P-2512, F20V-2512

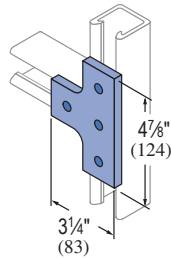


Wt/100 pcs: 26 Lbs (11.8 kg)

F20P-2514, F20V-2514




Wt/100 pcs: 20 Lbs (9.1 kg)

F20P-2516, F20V-2516




Wt/100 pcs: 32 Lbs (14.5 kg)

F20P-2518, F20V-2518

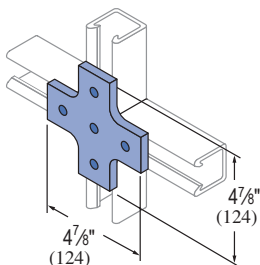


Wt/100 pcs: 33 Lbs (15.0 kg)

F20P-2520, F20V-2520




Wt/100 pcs: 45 Lbs (20.4 kg)

F20P-2522, F20V-2522



Wt/100 pcs: 21 Lbs (9.5 kg)


F20P-2524, F20V-2524



Wt/100 pcs: 32 Lbs (14.5 kg)




F20P-2526, F20V-2526




Wt/100 pcs: 45 Lbs (20.4 kg)

F20P-2528, F20V-2528




Wt/100 pcs: 20 Lbs (9.1 kg)

F20P-2530, F20V-2530

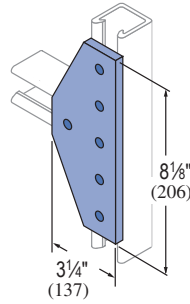


Wt/100 pcs: 50 Lbs (22.7 kg)

F20P-2534, F20V-2534

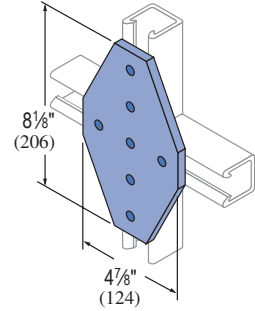


Wt/100 pcs: 77 Lbs (34.9 kg)

F20P-2540, F20V-2540

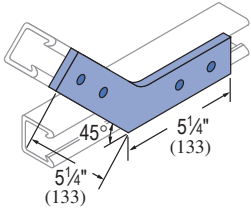


Wt/100 pcs: 41 Lbs (18.6 kg)

F50PU-2538

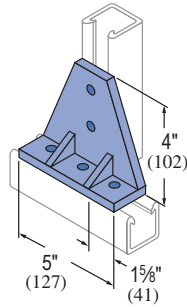


Wt/100 pcs: 57 Lbs (26.0 kg)

F50PU-2611

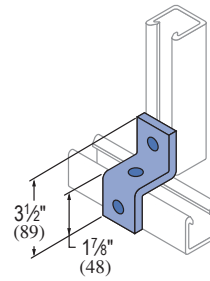


Wt/100 pcs: 9 Lbs (4.1 kg)

F50PU-2613

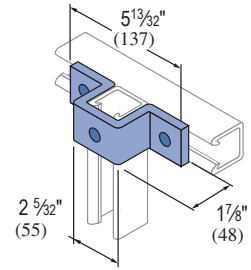


Wt/100 pcs: 16 Lbs (7.3 kg)

F50PU-1508 (1 1/2\"), F50PU-2008 (1 5/8\")




Wt/100 pcs: 27 Lbs (12.2 kg)

F50PU-2045 (1 5/8\")

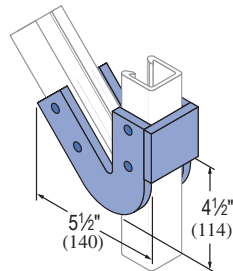


Wt/100 pcs: 35 Lbs (15.9 kg)

F50PU-2636

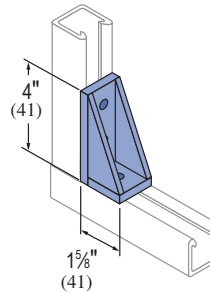


Wt/100 pcs: 14 Lbs (6.4 kg)

F50PU-2090 (1 5/8\")

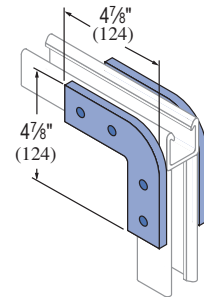


Wt/100 pcs: 35 Lbs (15.9 kg)

F50PU-2616

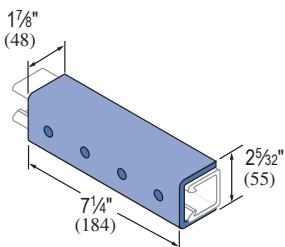


Wt/100 pcs: 51 Lbs (23.1 kg)

F20PU-5853 (1 5/8\"), F20PU-5855 (1 1/8\")

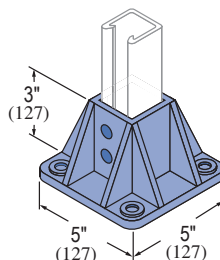

Wt/100 pcs: 71 Lbs (32.2 kg)

F20PU-5903 (3 1/4\"), F20PU-5905 (2 1/4\")

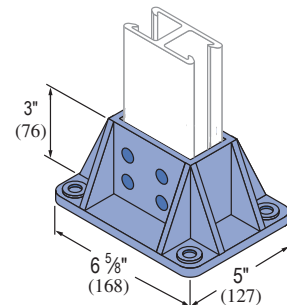


Wt/100 pcs: 86 Lbs (39.0 kg)

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

ADJUSTABLE PIPE CLAMPS

Unistrut Adjustable Pipe Clamps are manufactured from glass-reinforced polyurethane and are adjustable to accommodate a wide range of outside diameters. They can be utilized with a variety of piping systems including: PVC, fiberglass, copper, rigid steel conduit and PVC coated rigid steel conduit.

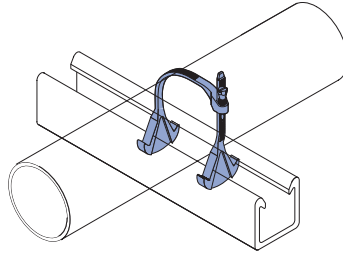

Care should be taken not to exceed 3 ft./lbs. of torque on the adjustable pipe straps.


Part Number	O.D. Pipe Size (in.)	Design Load		Torque Ft/Lbs (N·m)	Wt/100 pcs Lbs (kg)
		Type 1 Lbs (kN)	Type 2 Lbs (kN)		
200-3100	½– 1½	135 (0.6)	65 (0.3)	0.8 (1)	3 (1.4)
200-3110	1½– 2¼	135 (0.6)	65 (0.3)	3 (4)	5 (2.3)
200-3120	2¼– 3¼	145 (0.6)	70 (0.3)	3 (4)	5 (2.3)
200-3130	3– 4	215 (1.0)	70 (0.3)	3 (4)	8 (3.6)
200-3140	4– 6½	215 (1.0)	70 (0.3)	3 (4)	10 (4.5)

*Design loads shown represent a 3:1 safety factor.

RIGID PIPE CLAMPS

Part Number	PVC, Sch. 80 Design Loads*		FRP Bolt		Torque Ft/Lbs (N·m)	Wt/100 pcs Lbs (kg)
	Nominal & Rigid Metal Size (in.)	In (mm)	Type 1 Lbs (kN)	Type 2 Lbs (kN)		
FPCR-050	½	0.840 (21.3)	225 (1.0)	90 (0.4)	3 (4)	3 (1.4)
FPCR-075	¾	1.050 (26.7)	225 (1.0)	90 (0.4)		3 (1.4)
FPCR-100	1	1.315 (33.4)	225 (1.0)	90 (0.4)		4 (1.8)
FPCR-125	1¼	1.660 (42.2)	225 (1.0)	90 (0.4)		5 (2.3)
FPCR-150	1½	1.900 (48.3)	225 (1.0)	90 (0.4)		5 (2.3)
FPCR-200	2	2.375 (60.3)	225 (1.0)	90 (0.4)		5 (2.3)
FPCR-250	2½	2.875 (73.0)	225 (1.0)	90 (0.4)		7 (3.2)
FPCR-300	3	3.500 (88.9)	225 (1.0)	90 (0.4)		10 (4.5)
FPCR-400	4	4.500 (114.3)	300 (1.3)	125 (0.6)		12 (5.4)
FPCR-600	6	6.625 (168.3)	300 (1.3)	125 (0.6)		15 (6.8)
FPCR-800	8	8.625 (219.1)	300 (1.3)	125 (0.6)	18 (8.1)	

*Design loads shown represent a 3:1 safety factor.

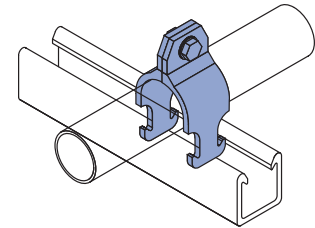


Rigid Pipe Clamps resemble the more traditional style of pipe clamps and are sized based on the pipe inside diameter or nominal size. Polyurethane clamps are recommended for applications up to 160°F. For high temperature applications (up to 230°F). Care should be taken not to exceed the recommended torque values of the rigid pipe clamps. Material: glass-reinforced polyurethane.

TWO HOLE PIPE STRAPS

Part No.	Dim. A In (mm)	Dim. B In (mm)	Bolt Size (in.)	Material Thick. In (mm)	Design Load		Torque Ft/Lbs (N·m)	Wt/100 pcs Lbs (kg)
					Type 1 Lbs (kN)	Type 2 Lbs (kN)		
FPS200	2.375 60.33	6.375 161.93	½	¼ 6.4	135 0.60	50 0.22	4 5	14 6.4
FPS250	2.875 73.03	6.875 174.63	½	¼ 6.4	135 0.60	50 0.22	4 5	17 7.7
FPS300	3.500 88.90	7.500 190.50	½	¼ 6.4	135 0.60	50 0.22	4 5	20 9.1
FPS350	4.000 101.60	8.000 203.20	½	¼ 6.4	135 0.60	50 0.22	4 5	33 15.0
FPS400	4.500 114.30	8.500 215.90	½	¼ 6.4	175 0.78	60 0.27	4 5	23 10.4
FPS500	5.563 141.30	9.563 242.90	½	¼ 6.4	175 0.78	60 0.27	4 5	39 17.7
FPS600	6.625 168.28	10.625 269.88	½	¼ 6.4	175 0.78	60 0.27	4 5	39 17.7
FPS800	8.625 219.08	12.625 320.68	½	¼ 6.4	225 1.00	125 0.56	4 5	51 23.1
FPS1000	10.750 273.05	15.750 400.05	¾	¼ 6.4	225 1.00	125 0.56	10 14	77 34.9
FPS1200	12.750 323.85	16.250 412.75	¾	¼ 6.4	225 1.00	125 0.56	10 14	83 37.6
FPS1400	14.000 355.60	18.000 457.20	¾	¾ 9.5	250 1.11	150 0.67	10 14	125 56.7
FPS1600	16.000 406.40	20.000 508.00	¾	¾ 9.5	250 1.11	150 0.67	10 14	143 64.9
FPS1800	18.000 457.20	23.000 584.20	¾	¾ 9.5	250 1.11	150 0.67	10 14	160 72.6

*Design loads shown represent a 3:1 safety factor.

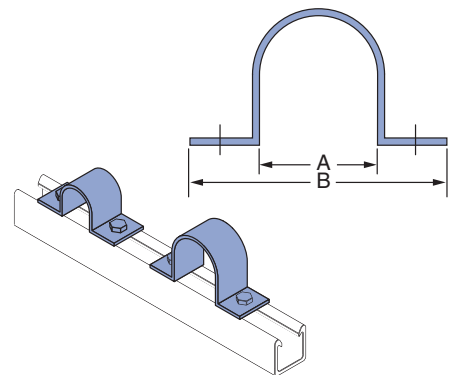

Two Hole Pipe Straps are designed for use in securing pipe, conduit and ducts to Channel. Two hole fiberglass straps can also be used independently from the channel for surface mounting. All sizes of the straps are suitable for load bearing applications.

Material: fire-retardant, glass-reinforced polyester resin.


For extreme chemical environments, the straps can be manufactured from vinyl ester resin. Larger diameter straps for special applications are also available. Contact the factory for pricing and availability of vinyl ester and large diameter straps. Two hole pipe straps should not be torqued above recommended values.

Notes:

- (1) Bolts and channel nuts are sold separately.
- (2) When bolting onto 1½" channel a 1¼" long bolt is req'd.



MOLDED CLEVIS HANGERS




Material: glass-reinforced polyurethane.

*Design load values shown represent a 3:1 safety factor.

Part Number	Nominal Diameter In (mm)	Max. Pipe O.D. In (mm)	"A" Dim. In (mm)	"B" Dim. In (mm)	"C" Dim. In (mm)	Hanger Rod In (mm)	Load* Lbs (kN)	Wt/100 pcs Lbs (kg)
FCVHPU-100	1/2 - 1	1	1.500	4.25	1.25	1/2	670	29
	13 - 25	25	38.1	108	32	13	2.98	13.2
FCVHPU-150	1/4 - 1 1/2	1 1/2	2.000	5.14	1.25	1/2	670	40
	32 - 38	38	50.8	131	32	13	2.98	18.1
FCVHPU-200	1 1/2 - 2	2	2.500	6.52	1.25	1/2	730	43
	38 - 51	51	63.5	166	32	13	3.25	19.5
FCVHPU-400	2 1/2 - 4	4	5.125	10.00	1.50	1/2	1,150	129
	64 - 102	102	130.2	254	38	13	5.12	58.5
FCVHPU-600	4 1/2 - 6	6	6.750	12.33	1.50	1/2	1,170	168
	114 - 152	152	171.5	313	38	13	5.20	76.2

FABRICATED CLEVIS HANGERS



Material: glass-reinforced polyester resin.

*Design load values shown represent a 3:1 safety factor.


Part Number	Size Range In (mm)	Dimensions - In (mm)					Hanger Rod In (mm)	Trans Rod In (mm)	Spreader Rod O.D. In (mm)	Loads* Lbs (kN)	Wt/100 pcs Lbs (kg)
		A	T	H	H1	W					
F100-1500	1-1 1/2	1/8	2 3/4	1 1/8	1 1/2	1/2	3/8	1/2	60	21	
	25 - 38	3	70	48	38	13	10	13	0.27	9.5	
F100-1501	1 1/2 - 2	1/8	3 1/2	2 3/8	1 1/2	1/2	3/8	1/2	60	25	
	38 - 51	3	89	60	38	13	10	13	0.27	11.3	
F100-1502	2 - 2 5/8	1/8	4 3/4	3	2	1/2	3/8	1/2	90	55	
	51 - 67	3	121	76	51	13	10	13	0.40	24.9	
F100-1503	2 1/2 - 3 1/4	1/8	5 1/2	3 3/8	2	1/2	3/8	1/2	120	57	
	64 - 83	3	140	92	51	13	10	13	0.53	25.9	
F100-1504	3 - 3 3/8	1/8	7	4 1/4	2	5/8	3/8	1/2	160	61	
	76 - 98	3	178	108	51	16	10	13	0.71	27.7	
F100-1505	4 - 5 1/8	13/16	8 1/2	5 3/8	2	5/8	3/8	1/2	250	82	
	102 - 130	21	216	143	51	16	10	13	1.11	37.2	
F100-1506	6 - 7 1/8	13/16	10 7/8	7 1/2	3	5/8	3/8	1/2	300	136	
	152 - 181	21	276	191	76	16	10	13	1.33	61.7	
F100-1507	8 - 9 1/4	1/4	14	9 3/4	3	5/8	3/8	1/2	350	189	
	203 - 235	6	356	248	76	16	10	13	1.56	85.7	
F100-1508	10 - 11 3/8	1/4	18	12	4	5/8	1/2	3/4	450	333	
	254 - 289	6	457	305	102	16	13	19	2.00	151.0	
F100-1509	12 - 13 1/2	1/4	21 1/2	14 1/8	5	5/8	1/2	3/4	600	350	
	305 - 343	6	546	359	127	16	13	19	2.67	158.8	
F100-1510	14 - 15 3/4	1/4	24 1/2	16 1/2	5	3/4	1/2	3/4	700	872	
	356 - 400	6	622	419	127	19	13	19	3.11	395.5	
F100-1511	16 - 18	3/8	27 3/8	19 1/2	6	3/4	3/4	1	750	1,023	
	406 - 457	10	695	495	152	19	19	25	3.34	464.0	
F100-1512	19 - 21	3/8	34 1/2	22 1/2	6	3/4	3/4	1	800	1,673	
	483 - 533	10	876	572	152	19	19	25	3.56	758.9	
F100-1513	21 - 22	1/2	35 1/2	24	6	3/4	3/4	1	850	2,323	
	533 - 559	13	902	610	152	19	19	25	3.78	1,053.7	
F100-1514	22 - 24	1/2	41	28	6	3/4	3/4	1	900	2,973	
	533 - 610	13	1,041	711	152	19	19	25	4.00	1,348.5	

F200-4101

UNISERT CHANNEL INSERT

Unisert is a polyurethane nonmetallic insert which can be used with standard cable ties for securing tubing, conduit and cables to standard metal channels. The Unisert works with all 1 1/2" channels that are 13/16" deep or more. One size fits 12, 14 and 16 metal gauge channels.

Note: For use only with metallic channel.




Wt/100 pcs: 1.0 Lbs (.5 kg)

1 1/2" Channel
 Telesstrut System
 Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

F375PU & F500PU

MOLDED BEAM CLAMPS

Material: glass-reinforced polyurethane




Assembly Part Number	Size In	Thread Shear Lbs (kN)*	Torque Ft/Lbs (N•m)	Wt/100 pcs Lbs (kg)
F375PU-BC	3/8	400 1.78	10 14	30 13.6
F500PU-BC	1/2	400 1.78	10 14	30 13.6


*Design load values shown represent a 3:1 safety factor.

FRGBC

MOLDED BEAM CLAMP ASSEMBLY



F375PU-BCCLP (3/8") Beam Clip Only



Note: Beam clamp clip must be purchased separately. Illustration purpose only

Material: glass-reinforced polyurethane.

Part Number	Size In	Thread Shear Lbs (kN)*	Torque Ft/Lbs (N•m)	Wt/100 pcs Lbs (kg)
FRGBC-1	3/8	500 2.22	10 14	43 19.5
FRGBC-2	1/2	500 2.22	10 14	43 19.5
FRGBC-3	5/8	500 2.22	10 14	43 19.5

*Design load values shown represent a 3:1 safety factor.

POWER-RACK STANCHIONS

The Power-Rack Stanchion is made entirely from glass-reinforced nylon, these stanchions offer greater corrosion resistance than classical metal stanchions. The interlocking design allows the arm to "lock" into nine different levels on the 14 1/4" stanchions and fourteen on the 17 1/2" stanchion. Glass-reinforced polyurethane stanchions are available as a special order. Contact Unistrut for pricing and availability.

Dimensions – The stanchion back has 9/16" x 15/16" holes to accept fasteners for mounting. There are two mounting holes in the 21 3/8" long stanchion and three in the 33 5/16" long stanchion. Thickness at the slotted mounting holes is 1 1/8". The mounting holes are spaced on 12" centers and require 1/2" diameter fasteners.

Installation – The Stanchions can be anchored into existing concrete structures using any industrial anchoring system. For new concrete structures, the Stanchions can be mounted to fiberglass concrete embedment channel and attached with 1/2" channel nuts and 1/2"x 3" Fiberfast Bolts.

Fire Retardance – Power-Rack materials meet or exceed the requirements of UL94 HB.


Loading – The recommended allowable loads on Power-Rack Stanchions vary depending upon the position of the arm. Use these guidelines for a safe, reliable installation:

- Total load on any one arm should not exceed 800 lbs.
- The sum of the loads on an arm multiplied by their distances to the wall stanchion should not exceed 1200 in./lbs.

Example: A cable weighing 200 lbs. is positioned on an arm at a distance of 5" from the wall stanchion.

If the total load is less than 800 lbs and the sum of the load multiplied by their distances to the wall stanchion does not exceed 1200 in./lbs., then the system is adequate. In this case,

Total load (200<800 lbs) = OK
Tot. moment (200x5 in. = 1000<1200 in./lbs.) = OK

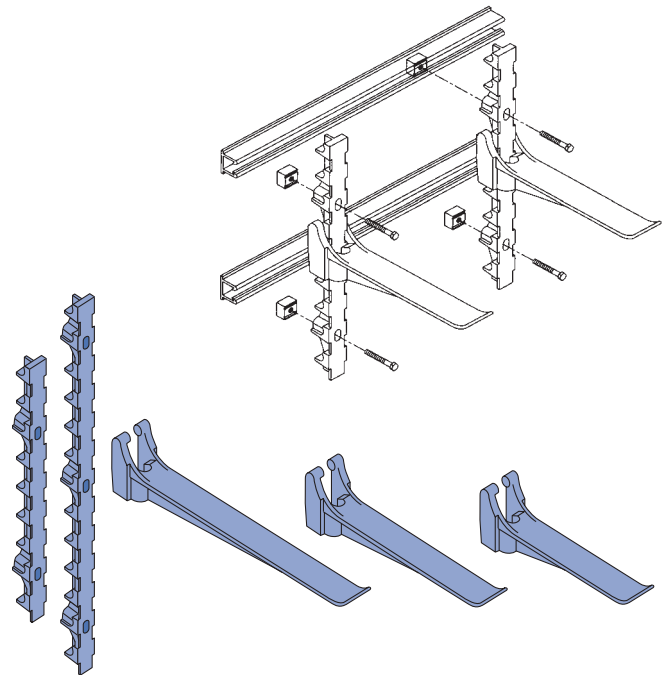

Part No.	Description	Size In (mm)	Wt/100 pcs Lbs (kg)	Load (lbs.)* Lbs (kN)
F20N-ARM08	Arm	8 203	100 45.4	800 3.56
F20N-ARM14	Arm	14 1/4 362	116 52.6	800 3.56
F20N-ARM17	Arm	17 1/2 445	145 65.8	800 3.56
F20N-ARM23	Arm	23 7/8 606	186 84.4	800 3.56
F20N-STA21	Stanchion	21 3/8 543	149 67.6	N/A
F20N-STA33	Stanchion	33 5/16 846	231 104.8	N/A

*Design load values shown represent a 3:1 safety factor.




FIBERGLASS CLAMPS DESIGN LOAD INFORMATION

There are two types of piping system loadings, overhead (Type 1) and vertical (Type 2) as described below. All pipe straps and clamps show the recommended loading for both types of loading.

Type 1 Overhead Design Load


The design load shown represents pipes supported below the strut. The design loads shown are based on a minimum ultimate failure safety factor of 3:1.

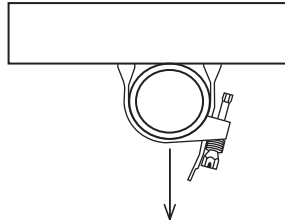

Type 2 Vertical Design Load

The design loading shown can be achieved with the addition of a vertical stop lock assembly (Part #F200-4219) installed directly beneath the pipe clamp. The adjacent illustration shows how the vertical stop lock assembly provides additional support for pipe and how it can be used to achieve full Type 2 design loads.

Design loads are based on a minimum clamp slip safety factor of 3:1. It is recommended that stop lock assemblies be used for all vertical pipe support applications.

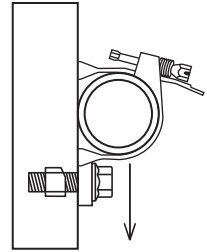

CHEMICAL COMPATIBILITY TABLE

Chemical	Series									
	E		P		V		PU		N	
	Rigid PVC		Poly/Glass		Vinyl/Glass		Poly		Nylon	
	70°	160°F	70°	160°F	70°	160°F	70°	160°F	70°	160°F
Acetic Acid, Up to 50%	R	R	R	R	R	R	R	-	nr	nr
Acetone, Up to 10%	nr	nr	nr	nr	nr	nr	R	-	R	R
Aluminum Hydroxide	R	R	R	R	R	R	R	-	nr	nr
Ammonium Hydroxide (Aqueous Ammonia), Up to 5%	R	R	nr	nr	R	R	R	-	-	-
Ammonium Hydroxide (Aqueous Ammonia), Up to 10%	R	R	nr	nr	R	150°	R	-	-	-
Ammonium Hydroxide, Up to 20%	R	R	nr	nr	R	150°	R	-	-	-
Ammonium Nitrate	R	nr	R	R	R	R	R	-	-	-
Ammonium Phosphate	R	R	R	nr	R	R	R	-	-	-
Ammonium Sulfide, saturated	R	R	nr	nr	R	120°	R	-	-	-
Aqua Regia, fumes	nr	nr	nr	nr	R	150°	nr	-	-	-
Benzene	nr	nr	nr	nr	nr	nr	R	R	-	R
Benzoic Acid	R	R	R	R	R	R	R	-	-	-
Bromine, wet gas	R	nr	nr	nr	R	100°	-	-	-	-
Butylene Glycol, Up to 100%	R	R	R	R	R	R	R	-	R	R
Butyric Acid, Up to 50%	nr	nr	R	R	R	R	R	-	-	-
Calcium Hydroxide	R	R	R	nr	R	R	R	-	-	-
Calcium Hypochlorite	R	R	R	nr	R	R	R	-	nr	nr
Chlorine, Dry Gas	nr	nr	nr	nr	R	R	-	-	-	-
Chlorine, Wet Gas	nr	nr	nr	nr	R	R	-	-	-	-
Chlorine, Liquid	nr	nr	nr	nr	nr	nr	-	-	-	-
Chlorine, Water	nr	nr	R	R	R	R	R	-	nr	nr
Chromic Acid, Up to 5%	R	R	nr	nr	R	R	-	-	R	R
Copper Chloride	R	R	R	R	R	R	R	-	-	-
Copper Cyanide	R	R	R	nr	R	R	R	-	-	-
Copper Fluoride	R	R	R	nr	R	R	R	-	-	-
Copper Nitrate	R	R	R	R	R	R	R	-	-	-
Copper Sulfate	R	R	R	R	R	R	R	-	-	-
Dechlorinated Brine Storage	R	R	-	-	R	R	R	-	-	-
Esters, Fatty Acid	nr	nr	R	R	R	R	R	-	-	-
Ferric Chloride	R	R	R	R	R	R	R	-	-	-
Ferrous Chloride	R	R	R	R	R	R	R	-	-	-
Fluoboric Acid	R	R	R	120°	R	R	-	-	-	-
Fluosilicic Acid, Up to 10%	nr	nr	nr	nr	R	R	-	-	nr	nr
Fluosilicic Acid, Up to 32%	nr	nr	nr	nr	R	100°	-	-	-	-

15/16" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

CHEMICAL COMPATIBILITY TABLE

Chemical	Series									
	E		P		V		PU		N	
	Rigid PVC		Poly/Glass		Vinyl/Glass		Poly		Nylon	
	70°	160°F	70°	160°F	70°	160°F	70°	160°F	70°	160°F
Formic Acid, Up to 10%	R	R	nr	nr	R	R	R	-	nr	nr
Formic Acid, Up to 50%	R	R	nr	nr	R	100°	R	-	-	-
Gasoline, Aviation	R	nr	R	nr	R	R	R	-	-	-
Green Liquor, Pulp Mill	R	R	-	-	R	R	-	-	-	-
Hydrochloric Acid, Up to 15%	R	R	R	nr	R	R	R	-	-	-
Hydrochloric Acid, Up to 37%	R	R	R	nr	R	R	R	-	-	-
Hydrofluoric Acid, Up to 10%	R	R	nr	nr	R	150°	-	-	-	-
Hydrofluoric Acid, Up to 20%	R	nr	nr	nr	R	100°	-	-	-	-
Hydrogen Chloride Wet Gas	nr	nr	R	nr	R	R	nr	-	-	-
Hydrogen Sulfide Wet Gas	R	R	R	nr	R	R	R	-	-	-
Lactic Acid	R	R	R	nr	R	R	R	-	-	-
Lead Nitrate	R	R	-	-	R	R	R	-	-	-
Magnesium Hydroxide	R	R	nr	nr	R	R	R	-	R	R
Nickel Sulfate	R	R	nr	nr	R	R	R	-	-	-
Nitric Acid, Up to 5%	R	R	nr	nr	R	150°	R	-	-	-
Nitric Acid, Up to 35%	R	R	nr	nr	R	150°	R	-	-	-
Nitric Acid, Vapor	R	R	nr	nr	R	R	R	-	-	-
Perchloric Acid, Up to 10%	nr	nr	nr	nr	R	150°	R	-	nr	nr
Pickling Liquids, 3-5% H2SO4	R	R	R	R	R	R	R	-	-	-
Phosphoric Acid	R	R	nr	nr	R	R	R	-	nr	nr
Super or Poly (115%, P20%)	R	R	nr	nr	R	R	R	-	-	-
Vapor or Condensate	R	R	nr	nr	R	R	R	-	-	-
Potassium Chloride	R	R	R	R	R	R	R	-	-	-
Potassium Nitrate	R	R	R	R	R	R	R	-	-	-
Potassium Persulfate	R	R	nr	nr	R	R	R	-	-	-
Silver Cyanide, Up to 5%	R	R	nr	nr	R	R	R	-	-	-
Sodium Hydroxide, Up to 25%	R	R	nr	nr	R	150°	R	-	-	-
Sodium Hydroxide, Up to 50%	R	R	nr	nr	R	180°	R	-	R	R
Sodium Hypochlorite, Up to 15%	R	R	nr	nr	R	150°	R	-	nr	nr
Sodium Nitrate	R	R	R	R	R	R	R	-	-	-
Sodium Sulfate	R	R	R	nr	R	R	R	-	-	-
Sodium Sulfide	R	R	nr	nr	R	R	R	-	-	-
Sulfuric Acid, Up to 25%	R	R	R	R	R	R	R	-	nr	nr
Sulfuric Acid, Up to 70%	R	R	nr	nr	R	R	R	-	nr	nr
Sulfuric Acid, Up to 75%	nr	nr	nr	nr	R	120°	R	-	nr	nr
Sulfuric Acid, Up to 80%	nr	nr	nr	nr	nr	nr	nr	-	nr	nr
Sulfuric Acid, Vapor	R	R	R	nr	R	R	R	-	-	-
Trichlorethylene, Fumes	nr	nr	nr	nr	R	120°	R	-	-	-
Trisodium Phosphate	R	R	R	nr	R	R	R	-	-	-
Urea	R	R	R	nr	R	150°	R	-	R	R
Vegetable Oils	R	R	R	R	R	R	R	-	R	R
Vinegar	R	R	R	R	R	R	R	R	R	R
White Liquor, Pulp Mill	R	R	-	-	R	R	R	-	-	-

Note

The recommendations contained in this table are made without guarantee of representation as to results. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Unistrut as to effects of such use or results to be obtained nor does Unistrut assume any liability arising out of the use by others of the products referenced in this table. Nor is the information herein to be construed as absolutely complete since additional information may be needed or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. We suggest that you evaluate these recommendations and suggestions in your own laboratory prior to use. Our responsibility for claims arising from breach of warranty, negligence, or otherwise is limited to the purchase price of the material.

Legend

- “nr” - “Not Recommended” for use
- “R” - “Recommended”
- “-” - no information available



FIBERGLASS SPECIFICATIONS

1.0 SCOPE

- 1.1 This specification covers the requirements for the Unistrut Nonmetallic Channel Framing System.

2.0 MATERIAL

- 2.1 FRP channel shall be of pultruded glass-reinforced polyester or vinyl ester resin having the physical property values listed in this catalog.
- 2.2 Some accessories shall be of injection molded, 40% long glass fiber reinforced polyurethane, or nylon.

3.0 COMPOSITION

- 3.1 Glass-reinforced channel shall have a synthetic surfacing veil applied on exterior surfaces to improve weatherability and inhibit ultraviolet degradation. An ultraviolet stabilizer shall be incorporated in the resin formulation to further inhibit ultraviolet degradation.

4.0 STRUCTURAL DESIGN

- 4.1 Channel shall incorporate Unistrut's patented flange profile design which allows full and positive interlocking contact of channel accessories and prohibits premature flange failure from torqued accessories.
- 4.2 Channel profile dimensions shall be:
- $$1\frac{5}{8}" \times 1\frac{5}{8}" \times \frac{1}{4}" \text{ or } 1\frac{1}{2}" \times 1\frac{1}{8}" \times \frac{1}{8}."$$
- 4.3 All $1\frac{5}{8}" \times 1\frac{5}{8}"$ channel profiles shall have a minimum pull out resistance of 1,000 pounds when load is applied over a $\frac{3}{8}"$ long section of the inside flanges.
- 4.4 Channel section lengths shall be supplied in 10' or 20' lengths ($\pm\frac{1}{8}"$).
- 4.5 Universal Pipe Clamps shall have full interlocking contact with interior channel flanges to maximize pull-out resistance and be adjustable to accommodate a minimum $\frac{3}{4}"$ variance in piping or conduit O.D. sizes.

5.0 STANDARDS


- 5.1 Glass-reinforced channels covered in this specification shall have a flame spread rating of 25 or less when tested per ASTM E84 and meet the requirements of UL 94V0 thereby qualifying them as Class 1 material in the Uniform Building Code.
- 5.2 Glass-reinforced channels covered in this specification shall comply with the requirements of ASTM D 3917 and ASTM D 4385 which govern the dimensional tolerance and visual defects of pultruded shapes.

6.0 GENERAL

- 6.1 Unistrut nonmetallic Channel Framing shall be furnished as a system which includes all the necessary fasteners, channel splice plates, brackets, sealants, hangers, pipe clamps, etc.
- 6.2 Nonmetallic fasteners shall be manufactured from long glass fiber reinforced polyurethane to ensure maximum strength and corrosion resistance.
- 6.3 All components of the Unistrut Channel Framing System shall be nonmetallic except where type 316 stainless steel hardware is used as part of the assembly.
- 6.4 The manufacturer shall not have had less than 10 years experience in manufacturing strut systems.
- 6.5 All products are manufactured in the United States of America.

Stainless Steel 185-186

Aluminum 187-188

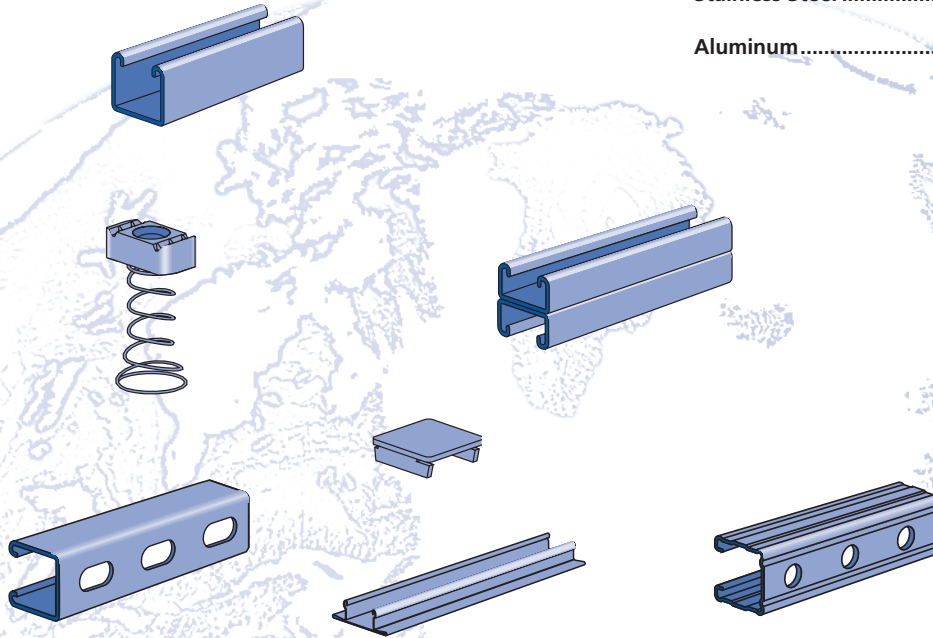

MATERIAL

STAINLESS STEEL

- Channels: ASTM A 240 (Type 304)
- Sintered nuts: ASTM B783 (Type 316N2-33)
- Fittings:
 - ASTM A240 (Type 304) or ASTM A276 (Type 304)
 - Type 316 stainless also available for most products.
 - Contact factory for specific material availability.

ALUMINUM

- Channels (Extruded): ASTM B221 (Type 6063-T6)
- Fittings: ASTM B209 (Type 1100F or Type 5052-H32)
- Nuts: ASTM B221 (Type 6063-T5)

LOAD DATA (BEAM & COLUMN)

To determine maximum allowable beam and column load for channels in this section, multiply the load data in the appropriate mild steel channel sections of this catalog by the following factors:

Channel Material	Beam Load % Factor	Column Load % Factor
Extruded Aluminum	33%	33%
Stainless Steel	100%	100%

LOAD DATA (SLIP & PULL OUT)

EXTRUDED ALUMINUM

To determine nut slip resistance, multiply load data for appropriate nut by 75%. To determine nut pull-out load, multiply load data for appropriate nut by 50%.

STAINLESS STEEL

For design assistance, consult Unistrut customer engineering.

PRODUCT AVAILABILITY

Most fittings and channels shown in this catalog, are available in aluminum or stainless steel. Consult factory for ordering information.

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.



P1000 Series (12 gauge)



P1000 SS
Pg 185



P1001 SS
Pg 185

P1100 Series (14 gauge)



P1100 SS
Pg 185



P1101 SS
Pg 185

P3000 Series (12 gauge)



P3000 SS
Pg 185

P3300 Series (12 gauge)



P3300 SS
Pg 185



P3301 SS
Pg 185

P4000 Series (16 gauge)



P4000 SS
Pg 185

P6000 Series (19 gauge)



P6000 SS
Pg 185

P7000 Series (19 gauge)



P7000 SS
Pg 185

Closure Strips and End Caps



P1184 SS
Pg 186



P3184 EA
Pg 186



P1280 EA, P4280 EA,
P5580 EA Pg 188

Stainless Steel Channel Nuts



P1006 U - P1010U
Pg 186



P4006 U - P4010
Pg 186



P5506 U - P5510U
Pg 186



P4010 UT
Pg 186



A1006 SS, A1008 SS
Pg 186



A4006 SS, A4008 SS
Pg 186

Extruded Aluminum Channels



P1000 EA
Pg 187



P1001 EA
Pg 187



P4000 EA
Pg 187



P4001 EA
Pg 187



P5500 EA
Pg 187



A1000 EA
Pg 187



A4000 EA
Pg 187



A4001 EA
Pg 188



P6000 EA
Pg 188



P6001 EA
Pg 188



P7000 EA
Pg 188




P7001 EA
Pg 188

Product Index
 PrimeAngle System
 Special Metals
 Fiberglass System
 1 3/16" Framing System
 1 1/4" Framing System
 Concrete Inserts
 Electrical Fittings
 Pipe/Conduit Supports
 General Fittings
 Nuts & Hardware
 Telesruct System
 1 5/8" Channel


P1000 SERIES

P1000 SS



Wt/100 Ft: 190 Lbs (283 kg/100m)


P1001 SS



Wt/100 Ft: 380 Lbs (566 kg/100m)

P1000HS SS


9/16" (14) Dia. Holes
1 7/8" (48) on Center



Wt/100 Ft: 185 Lbs (275 kg/100m)

P1000T SS


Slots are
1 1/8" (29) x 9/16" (14)
2" (51) on Center

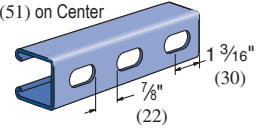

Wt/100 Ft: 185 Lbs (275 kg/100m)


P1100 SERIES

P1100 SS



Wt/100 Ft: 142 Lbs (211 kg/100m)


P1101 SS



Wt/100 Ft: 284 Lbs (422 kg/100m)

P1100HS SS


9/16" (14) Dia. Holes
1 7/8" (48) on Center



Wt/100 Ft: 136 Lbs (202 kg/100 m)

P1100T SS


Slots are
1 1/8" (29) x 9/16" (14)
2" (51) on Center

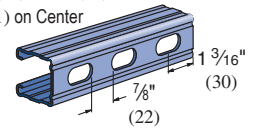

Wt/100 Ft: 136 Lbs (202 kg/100m)

P3000 SERIES


P3000 SS



Wt/100 Ft: 170 Lbs (253 kg/100m)

P3000HS SS


9/16" (14) Dia. Holes
1 7/8" (48) on Center



Wt/100 Ft: 165 Lbs (112 kg/100m)

P3000T SS


Slots are
1 1/8" (29) x 9/16" (14)
2" (51) on Center

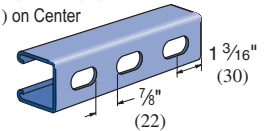

Wt/100 Ft: 165 Lbs (112 kg/100m)


P3300 SERIES

P3300 SS



Wt/100 Ft: 135 Lbs (201 kg/100m)


P3301 SS



Wt/100 Ft: 270 Lbs (402 kg/100m)

P3300HS SS


9/16" (14) Dia. Holes
1 7/8" (48) on Center



Wt/100 Ft: 130 Lbs (193 kg/100m)

P3300T SS


Slots are
1 1/8" (29) x 9/16" (14)
2" (51) on Center



Wt/100 Ft: 130 Lbs (193 kg/100m)

P4000 SERIES


P4000 SS



Wt/100 Ft: 82 Lbs (122 kg/100m)

P4000HS SS


9/16" (14) Dia. Holes
1 7/8" (48) on Center



Wt/100 Ft: 79 Lbs (110 kg/100m)


P4000T SS

Slots are
1 1/8" (29) x 9/16" (14)
2" (51) on Center




Wt/100 Ft: 79 Lbs (110 kg/100m)

P6000 SS



Wt/100 Ft: 37 Lbs (55 kg/100m)

P7000 SS





Wt/100 Ft: 36 Lbs (54 kg/100m)



P1184 SS


CLOSURE STRIP




Standard length 10 Ft.
Material: Stainless steel type 304.

Part Number	Use With Channel	"W" In (mm)	Wt/100 Ft Lbs (kg/m)
P1184 SS	P1000		
	P1100	1½"	27
	P3300	41	40.2
	P4000		


CHANNEL NUT WITH SPRING— FOR USE WITH 1¼" CHANNEL


	Part number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	A1006-1420 SS	¼" -20	6 (2.7)	A1000
A1008 SS	¾" -16	6 (2.7)		


	Part number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With
	A4006-1420 SS	¼" -20	5 (2.3)	A3300, A4000
A4008 SS	¾" -16	5 (2.3)		

* All Springs are Pre-Galvanized

CHANNEL NUT WITH SPRING – FOR USE WITH 1½" CHANNEL

	Part number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With 1½" Channel
	P1006U-1420 SS	¼" 20	7 (3.2)	P1000, P1100, P2000, P3000
	P1008U SS	¾" 16	10 (4.5)	
	P1010U SS	½" 13	12 (5.4)	


	Part number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With 1½" Channel
	P4006U-1420 SS	¼" 20	7 (3.2)	P3300, P4000, P4100
	P4008 SS	¾" 16	9 (4.1)	
	P4010 SS	½" 13	9 (4.1)	

	Part number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With 1½" Channel
	P5506U-1420 SS	¼" 20	7 (3.2)	P5500
	P5508U SS	¾" 16	10 (4.5)	
	P5510U SS	½" 13	10 (4.5)	

* All Springs are Pre-Galvanized

The letter "U" in Part number = Sintered type 316 stainless steel

CHANNEL NUT WITHOUT SPRINGS – FOR USE WITH 1½" CHANNEL

	Part number	Nut Size Thread	Wt/100 pcs Lbs (kg)	Use With 1½" Channel
	P4006T-1420 SS	¼" 20	7 (3.2)	P1000, P1100, P2000, P3000 P5500
	P4008UT SS	½" 13	12 (5.4)	
	P4010UT SS	½" 13	8 (3.6)	P3300, P4000, P4100


The letter "U" in Part number = Sintered type 316 stainless steel




Note

Most fittings, as shown in this catalog are available in stainless steel or aluminum. It is recommended that stainless steel channel nuts be used with aluminum channels.

1½" Channel
 Telestrut System
 Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1¼" Framing System
 1¾" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index




P1000 EA

 When used with P3184 EA.






Wt/100 Ft: 76 Lbs (113 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .109" (2.8mm)

P1001 EA






Wt/100 Ft: 134 Lbs (199 kg/100 m)
Aluminum Type 6063-T6
12 Gauge Nominal Thickness .109" (2.8mm)

P4000 EA






Wt/100 Ft: 45 Lbs (67 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .078" (2.0mm)

P4001 EA






Wt/100 Ft: 66 Lbs (98 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .078" (2.0mm)

P5500 EA






Wt/100 Ft: 97 Lbs (144 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .109" (2.8mm)

A1000 EA



Wt/100 Ft: 40 Lbs (60 kg/100 m)
Aluminum Type 6063-T6
Nominal Thickness .075" (1.9mm)




A4000 EA



Wt/100 Ft: 25 Lbs (37 kg/100 m)
Aluminum Type 6063-T6
12 Gauge Nominal Thickness .050" (1.3mm)
Standard Length 16 Ft.






A4001 EA






Wt/100 Ft: 40 Lbs (60 kg/100 m)
 Aluminum Type 6063-T6
 Nominal Thickness .078" (2.0mm)
 Standard Length 16 Ft.

P6000 EA






Wt/100 Ft: 12 Lbs (18 kg/100 m)
 Aluminum Type 6063-T6
 Nominal Thickness .040" (1.0mm)
 Standard Length 16 Ft.

P6001 EA






Wt/100 Ft: 20 Lbs (30 kg/100 m)
 Aluminum Type 6063-T6
 Nominal Thickness .040" (1.0mm)
 Standard Length 16 Ft.

P7000 EA



Wt/100 Ft: 9 Lbs (13 kg/100 m)
 Aluminum Type 6063-T6
 Nominal Thickness .040" (1.0mm)
 Standard Length 10 Ft.



P7001 EA



Wt/100 Ft: 17 Lbs (25 kg/100 m)
 Aluminum Type 6063-T6
 12 Gauge Nominal Thickness .040" (1.0mm)
 Standard Length 10 Ft

P3184 EA


CLOSURE STRIP



Wt/100 Ft: 21 Lbs (31 kg/100 m)
 Aluminum Type 6063-T6
 Standard Length 10 Ft

P1280 EA, P4280 EA, P5580 EA


END CAPS



Part Number	Use With Channel	Wt/100 Ft Lbs(kg/m)
P1280 EA	P1000 EA	3.5 (1.6)
P4280 EA	P4000 EA	1.5 (0.7)
P5500 EA	P5500 EA	4.9 (2.2)

1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/16" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

PrimeAngle™	190
Accessories	191
PrimeAngle™ Technical Data	192-194

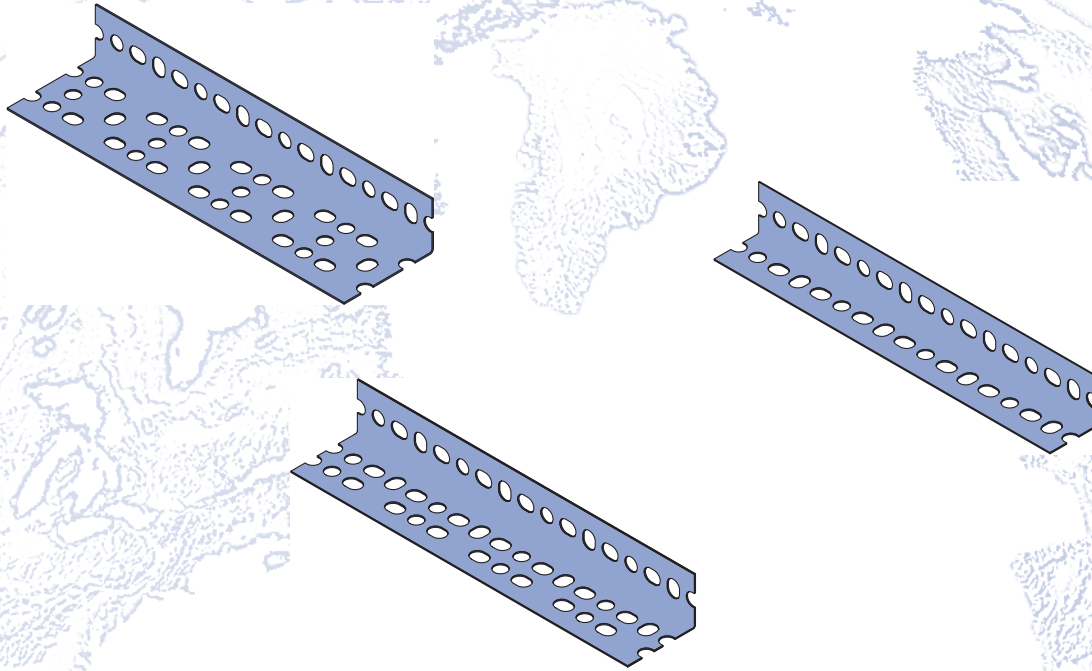

MATERIAL

STEEL: PLAIN

12 Gauge (.105" 1.0 mm) ASTM 1011 SS GR 33,
14 Gauge (.076) ASTM 1011 SS GR 33

STEEL: PRE-GALVANIZED

12 Gauge (.105" 1.0 mm) ASTM A653 GR 33,
14 Gauge (.076) ASTM A653 GR 33

FINISHES

Available in two durable, long-lasting finishes:

- Pre-Galvanized (PG) or
- Perma-Green III (GR) conforming to
ASTM B633 Type III SC1.

STANDARD LENGTHS

Standard lengths are 10' and 12'. Slotted angle is shipped in ten-piece bundles complete with 75 pieces of 3/8" - 16 x 3/4" hex head bolts and 3/8" nuts.

ORDERING INFORMATION:

When ordering, add the length or size and finish to the part number.


DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.



PA 158

(1⁵/₈" x 1⁵/₈" x 14 GA.) LIGHT DUTY

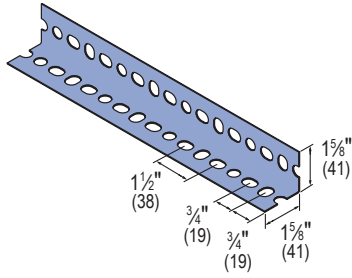


Note: Includes Serrated Nuts & Bolts

For those jobs where extra strength is not necessary. Ideal for light-duty shelving or racking.

Wt/100 Ft.: 66 lbs (29.9 kg)

PA 238

(1⁵/₈" x 2³/₈" x 14 GA.) MEDIUM DUTY

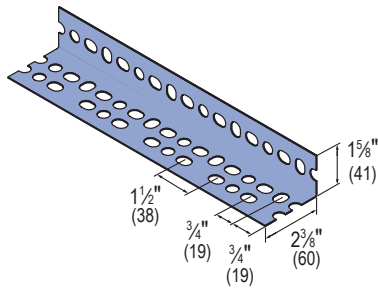


Note: Includes Serrated Nuts & Bolts

Perfect for the majority of framing needs, including shelving, racking and electrical or mechanical support jobs.

Wt/100 Ft.: 80 lbs(36.3 kg)

PA 318

(1⁵/₈" x 3¹/₈" x 12 GA.) HEAVY DUTY

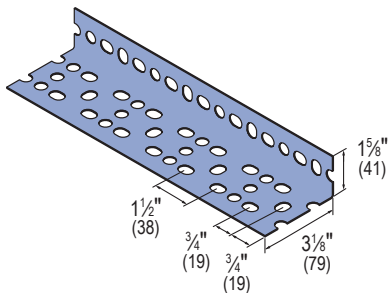


Note: Includes Serrated Nuts & Bolts

Suitable for balconies, ramps, large racks and shelving systems, as well as other structures with substantial load requirements.

Wt/100 Ft.: 130 lbs (59.0 kg)

PA 1HDC


PORTABLE CUTTER

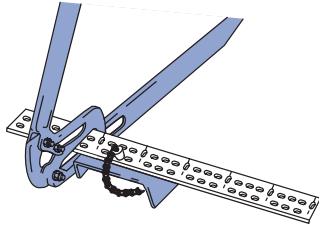

Wt/100 pcs: 17 lbs (7.7 kg)

PA 1GP

GUSSET PLATE



Wt/100 pcs: 9 lbs (4.1 kg)

PA 1SC

SWIVEL CASTER



Wt/100 pcs: 170 lbs (77.1 kg)

PA 1RC


RIGID CASTER



Wt/100 pcs: 110 lbs (49.9 kg)

PA 1SNB


SERRATED NUTS AND BOLTS



Wt/100 pcs: 7 lbs (3.2 kg)

PA 1RP

SLOTTED STRAP



Wt/100 pcs: 35 lbs (15.9 kg)


TRANSVERSE STIFFENERS

When supporting concentrated loads, the capacity of a pair of slotted-angle beams can be increased by the addition of transverse stiffeners. These should be placed immediately under the load bearing point. The slotted-angle segment used as the stiffener is bolted into place using a metal connector at each junction.

Beams that are 6' (182.9 cm) long or less require only one stiffener in the center of the span. Seven-foot beams need two stiffeners placed 2' (61.0 cm) from each end. Eight-foot beams require two stiffeners 2'6" (76.2 cm) from the ends. For beams with a nine-foot span, it is necessary to have three stiffeners at 2'3" (68.6 cm) intervals. Ten-foot beams need three stiffeners with 2'6" spacings.

For maximum effectiveness, transverse stiffeners should never be spaced more than 3'6" (106.7 cm) apart.

Note: All loads based on actual physical testing. Documentation available on request.

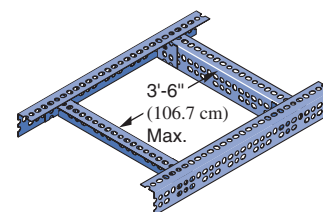





BEAM CONFIGURATIONS

(See corresponding letters in table on following page for load data)


G – Two Single Pieces (Up)




H – Two Single Pieces (Level)




I – Two Single Pieces (Down)




J – Two Z-Sections




K – Two Narrow Channels




L – Two Broad Channels




M – Two T-Sections

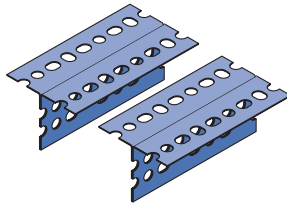

N – Two I-Section

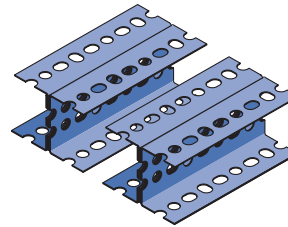


O – Two J-Sections

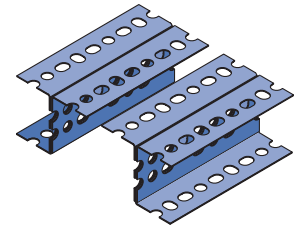


BEAM CONFIGURATIONS WITH STIFFENERS

(See corresponding letters in table on following page for load data)


P – Single Pieces w/Stiffener

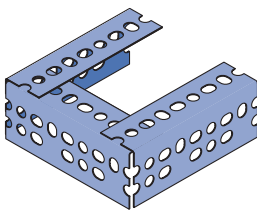


Q – T-Sections w/Stiffener

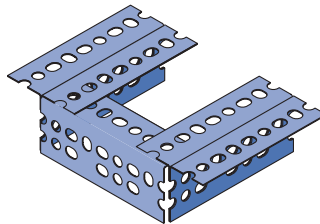

R – Z-Sections w/Stiffener

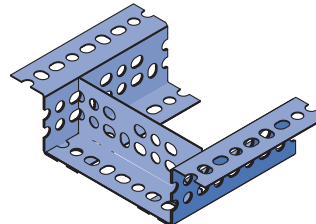

R – I-Sections w/Stiffener

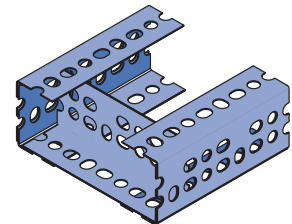


BEAM LOAD CALCULATIONS

The beam loading depends on which slotted angle is used and the manner in which the beam is constructed. The diagrams above show how individual slotted angle components can be combined to form a beam. The loading for each beam configuration is shown in the beam loading tables on the next page.


Example - Load "A"

Load "A" is supported by two 48" (121.9 cm) sections of PA-238 (1 5/8" x 2 3/8") (41mm x 60mm). The 48" row in the PA 238 table on next page indicates what each beam configuration will support. Since the columns are sorted from lowest to highest load, the first configuration that satisfies the requirement is "J" which will support 1,100 lbs (4.9 kN).




Example - Load "B"

Load "B" is supported by two 36" (91.4 cm) sections of PA-238 (1 5/8" x 2 3/8") (41mm x 60mm). The 36" row in the PA 238 table on next page indicates what each beam configuration will support. Since the columns are sorted from lowest to highest load, the first configuration that satisfies the requirement is "J" which will support 1,100 lbs (4.9 kN).



Example - Load "C"

Load "C" is supported by all four beam sections. The load is distributed uniformly on two 3' (91.4 cm) and two 4' (121.9 cm) beams which total 14' (426.7 cm) of supporting beam length. Dividing the 1,000 lbs. (4.5 kN) load by 14-feet equals 72 lbs. per foot (106.3 kg per meter). Using the two 4' (121.9 cm) longest (weakest) lengths, calculate the total weight as follows:



$$2 \text{ (beams)} \times 4' \text{ (length)} \times 72 \text{ lbs./ft.} = 576 \text{ lbs. total wt.}$$

$$2 \text{ (beams)} \times 121.9\text{cm (length)} \times 106.3 \text{ kg/M} = 25,915 \text{ kg total wt.}$$

The 36" (91.4 cm) row in the PA 238 table on next page indicates what each beam configuration will support. Since the columns are sorted from lowest to highest load, the first configuration that satisfies the requirement is "J" which will support 830 lbs. (3.7 kN) and is adequate for this requirement. The 3-foot beams configured in the same manner will support the load because they are shorter and stronger.


1 5/8" Channel
 Telestrut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1 1/4" Framing System
 1 3/4" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index

BEAM LOADS

(See corresponding letters in table on previous page for configurations)

PA 158


LIGHT DUTY, (1 5/8" x 1 5/8" x 14 GA.)



Span In. (cm)	G Lbs (kN)	H Lbs (kN)	I Lbs (kN)	P Lbs (kN)	L Lbs (kN)	R Lbs (kN)	M Lbs (kN)
24	550	830	830	920	1,600	1,700	1,840
61.0	2.4	3.7	3.7	4.1	7.1	7.6	8.2
36	370	560	560	610	1,070	1,130	1,230
91.4	1.6	2.5	2.5	2.7	4.8	5.0	5.5
48	280	420	420	460	800	850	920
121.9	1.2	1.9	1.9	2.0	3.6	3.8	4.1
60	220	330	330	370	640	680	740
152.4	1.0	1.5	1.5	1.6	2.8	3.0	3.3
72	180	280	280	310	530	570	610
182.9	0.8	1.2	1.2	1.4	2.4	2.5	2.7
84	•	240	240	260	460	490	530
213.4	•	1.1	1.1	1.2	2.0	2.2	2.4
96	•	210	210	230	400	430	460
243.8	•	0.9	0.9	1.0	1.8	1.9	2.0
108	•	•	•	•	360	380	410
274.3	•	•	•	•	1.6	1.7	1.8
120	•	•	•	•	320	340	370
304.8	•	•	•	•	1.4	1.5	1.6

PA 238


MEDIUM DUTY, (1 5/8" x 2 3/8" x 14 GA.)



Span In. (cm)	G Lbs (kN)	H Lbs (kN)	I Lbs (kN)	P Lbs (kN)	J Lbs (kN)	L Lbs (kN)	R Lbs (kN)	M Lbs (kN)	K Lbs (kN)	Q Lbs (kN)	O Lbs (kN)	N Lbs (kN)
24	700	1,020	1,660	1,740	2,220	3,170	3,230	3,490	3,590	3,630	6,060	7,560
61.0	3.1	4.5	7.4	7.7	9.9	14.1	14.4	15.5	16.0	16.2	27.0	33.6
36	460	680	1,100	1,160	1,480	2,110	2,150	2,320	2,390	2,420	4,040	5,040
91.4	2.0	3.0	4.9	5.2	6.6	9.4	9.6	10.3	10.6	10.8	18.0	22.4
48	350	510	830	870	1,110	1,580	1,620	1,740	1,800	1,810	3,030	3,780
121.9	1.6	2.3	3.7	3.9	4.9	7.0	7.2	7.7	8.0	8.1	13.5	16.8
60	280	410	660	700	890	1,270	1,290	1,390	1,440	1,450	2,420	3,020
152.4	1.2	1.8	2.9	3.1	4.0	5.6	5.7	6.2	6.4	6.5	10.8	13.4
72	230	340	550	580	740	1,060	1,080	1,160	1,200	1,210	2,020	2,520
182.9	1.0	1.5	2.4	2.6	3.3	4.7	4.8	5.2	5.3	5.4	9.0	11.2
84	•	290	470	500	630	910	920	1,000	1,030	1,040	1,730	2,160
213.4	•	1.3	2.1	2.2	2.8	4.1	4.1	4.5	4.6	4.6	7.7	9.6
96	•	260	410	440	550	790	810	870	900	910	1,520	1,890
243.8	•	1.2	1.8	2.0	2.4	3.5	3.6	3.9	4.0	4.1	6.8	8.4
108	•	•	•	•	490	700	720	770	800	810	1,350	1,680
274.3	•	•	•	•	2.2	3.1	3.2	3.4	3.6	3.6	6.0	7.5
120	•	•	•	•	440	630	650	700	720	730	1,210	1,510
304.8	•	•	•	•	2.0	2.8	2.9	3.1	3.2	3.2	5.4	6.7

PA 318

HEAVY DUTY, (1 5/8" x 3 1/8" x 12 GA.)



Span In. (cm)	G Lbs (kN)	H Lbs (kN)	I Lbs (kN)	P Lbs (kN)	J Lbs (kN)	L Lbs (kN)	R Lbs (kN)	M Lbs (kN)	K Lbs (kN)	Q Lbs (kN)	O Lbs (kg)	N Lbs (kg)
24	1,790	1,610	4,300	4,960	6,520	7,910	8,070	9,920	9,990	10,170	14,600	16,120
61.0	8.0	7.2	19.1	22.1	29.0	35.2	35.9	44.1	44.4	45.2	64.9	71.7
36	1,200	1,070	2,870	3,310	4,350	5,270	5,380	6,610	6,660	6,780	9,730	10,750
91.4	5.3	4.8	12.8	14.7	19.3	23.4	23.9	29.4	29.6	30.2	43.3	47.8
48	900	810	2,150	2,480	3,260	3,950	4,030	4,960	4,990	5,080	7,300	8,060
121.9	4.0	3.6	9.6	11.0	14.5	17.6	17.9	22.1	22.2	22.6	32.5	35.9
60	720	640	1,720	1,980	2,610	3,160	3,230	3,970	4,000	4,070	5,840	6,450
152.4	3.2	2.8	7.6	8.8	11.6	14.1	14.4	17.7	17.8	18.1	26.0	28.7
72	600	540	1,430	1,650	2,170	2,640	2,690	3,310	3,330	3,390	4,870	5,370
182.9	2.7	2.4	6.4	7.3	9.6	11.7	12.0	14.7	14.8	15.1	21.7	23.9
84	•	460	1,230	1,420	1,860	2,260	2,300	2,830	2,850	2,910	4,170	4,610
213.4	•	2.0	5.5	6.3	8.3	10.1	10.2	12.6	12.7	12.9	18.5	20.5
96	•	400	1,080	1,240	1,630	1,980	2,020	2,480	2,500	2,540	3,650	4,030
243.8	•	1.8	4.8	5.5	7.2	8.8	9.0	11.0	11.1	11.3	16.2	17.9
108	•	•	•	1,100	1,450	1,760	1,790	2,200	2,220	2,260	3,240	3,580
274.3	•	•	•	4.9	6.5	7.8	8.0	9.8	9.9	10.1	14.4	15.9
120	•	•	•	990	1,300	1,580	1,610	1,980	2,000	2,030	2,920	3,220
304.8	•	•	•	4.4	5.8	7.0	7.2	8.8	8.9	9.0	13.0	14.3



COLUMN LOADS


Column sections are calculated as described in the following example: (Assumes use of PA-238 1½" x 2¾" (41mm x 60mm), material.)

Since all load areas are supported equally by the 4-columns, the calculations are based on a single-column section.

Section MN is one-fourth of "X", or 250 pounds (1.1 kN). Column section NP supports one-fourth of "Y" (250 pounds) plus the load supported by MN, or a total of 500 pounds (2.2 kN). Section PQ supports one-fourth of "Z" (250 pounds) plus the 500 pound load on section NP, or a total of 750 (3.3kN) pounds.


Column loads are based on free and unbraced column lengths. Since MN, NP and PQ are each 3' long, the load requirement is for a 36" section that will bear 750 pounds safely. A reference to the PA 238 table to the right indicates that all sections designated "A" will support 2,280 lbs. (10.1 kN) and meet the necessary requirements.

Note: To simplify assembly, we recommend using the same size material as for the horizontal members. This would be found in Table 2 to match the 14 gauge 1½" x 2¾" (41mm x 60mm) material selected for the beams of this structure.

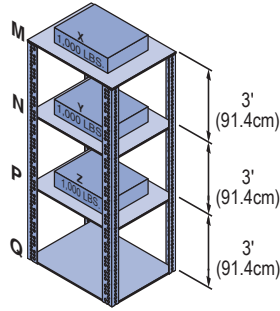

PA 158


(1½" x 1½" x 14 GA.)



Span In. (cm)	A Lbs (kN)	B Lbs (kN)
36	1,450	3,850
91.4	6.5	17.1
48	1,150	3,500
121.9	5.1	15.6
60	950	3,000
152.4	4.2	13.3
72	750	2,500
182.9	3.3	11.1


PA 238

(1½" x 2¾" x 14 GA.)




Span In. (cm)	A Lbs (kN)	B Lbs (kN)	C Lbs (kN)	D Lbs (kN)	E Lbs (kN)	F Lbs (kN)
36	2,280	4,760	4,940	7,270	9,520	9,865
91.4	10.1	21.2	22.0	32.3	42.3	43.9
48	1,970	4,490	4,680	6,920	8,970	9,330
121.9	8.8	20.0	20.8	30.8	39.9	41.5
60	1,520	3,995	4,310	6,370	7,990	8,620
152.4	6.8	17.8	19.2	28.3	35.5	38.3
72	1,070	3,140	3,870	5,840	6,280	7,715
182.9	4.8	14.0	17.2	26.0	27.9	34.3
84	660	2,340	3,665	4,930	4,660	6,740
213.4	2.9	10.4	16.3	21.9	20.7	30.0
96	•	1,750	2,700	3,850	3,500	5,365
243.8	•	7.8	12.0	17.1	15.6	23.9
108	•	•	2,060	2,870	•	4,115
274.3	•	•	9.2	12.8	•	18.3
120	•	•	1,610	2,690	•	3,210
304.8	•	•	7.2	12.0	•	14.3


A – Single Piece




B – T-Section




B – Broad Channel Section




B – Narrow Channel Section




C – Uneven T-Section




C – Uneven Channel Section




D – Dual Channel Section




D – T-Channel Section




D – T-Channel Section



E – I-Section




F – Uneven I-Section



PA 318

(1½" x 3½" x 12 GA.)



Span In. (cm)	A Lbs (kN)	B Lbs (kN)	C Lbs (kN)	D Lbs (kN)	E Lbs (kN)	F Lbs (kN)
36	3,470	7,970	8,770	12,560	15,940	17,550
91.4	15.4	35.5	39.0	55.9	70.9	78.1
48	2,870	7,360	8,580	11,970	14,750	17,150
121.9	12.8	32.7	38.2	53.2	65.6	76.3
60	1,970	6,570	8,180	11,360	13,160	16,360
152.4	8.8	29.2	36.4	50.5	58.5	72.8
72	1,280	5,270	7,690	10,480	10,560	15,360
182.9	5.7	23.4	34.2	46.6	47.0	68.3
84	•	3,670	6,970	9,470	7,370	13,970
213.3	•	16.3	31.0	42.1	32.8	62.1
96	•	2,580	6,260	8,370	5,170	12,570
243.8	•	11.5	27.8	37.2	23.0	55.9
108	•	•	5,460	6,880	•	10,970
274.3	•	•	24.3	30.6	•	48.8
120	•	•	4,460	5,370	•	8,960
304.8	•	•	19.8	23.9	•	39.9

1½" Channel
 Telesnut System
 Nuts & Hardware
 General Fittings
 Pipe/Conduit Supports
 Electrical Fittings
 Concrete Inserts
 1¼" Framing System
 1¾" Framing System
 Fiberglass System
 Special Metals
 PrimeAngle System
 Product Index



200-3100 thru 200-3140	177
004M007 thru 082M090	108
004T008 thru 022T026, 009N012 thru 106N114	107
A1000	143
A1000 EA	187
A1001	143
A1001A	144
A1001B	144
A1001C	144
A1006-1420	150
A1006-1420 SS	186
A1007	150
A1008	150
A1008 SS	186
A1026	151
A1031	151
A1033	152
A1036	151
A1037	152
A1038	152
A1045	152
A1047	153
A1063	151
A1065	151
A1066	151
A1068	151
A1184	151
A1184P	151
A1191	151
A1280	151
A1325	152
A1326	151
A1331	152
A1332	152
A1357	152
A1458	151
A1579	152
A2084	153
A2109	153
A2110	153
A2111	153
A2120	152
A2125	153
A2126	153
A2127	153
A2223	153
A2227	153
A2235	152
A2324	151
A2341 R-L	153
A2345	153
A2472 R-L	153
A2494 R-L thru A2497 R-L	154
A2608	154
A2608 thru A2617	154
A2609	154
A2611	154
A2612	154
A2613	154

A2614	154
A2615	154
A2617	154
A3006-1420	150
A3007	150
A3008	150
A3016-0832	150
A3016-1024	150
A3016-1032	150
A3016-1420	150
A3300	145
A3301	145
A3345	152
A3347	153
A4000	147
A4000 EA	187
A4001	147
A4001 EA	188
A4006-1420	150
A4006-1420 SS	186
A4007	150
A4008	150
A4008 SS	186
A4045	152
A4047	153
A4120	152
A4280	151
A5000	149
A5007	150
A5043	153
A5045	152
A5047	153
A5120	152
A5280	151
A5506-1420	150
A5506-1420 SS	186
A5508	150
A5508 SS	186
CG-10 thru CG-40	110
F100-1500	178
F100-1501	178
F100-1502	178
F100-1503	178
F100-1504	178
F100-1505	178
F100-1506	178
F100-1507	178
F100-1508	178
F100-1509	178
F100-1510	178
F100-1511	178
F100-1512	178
F100-1513	178
F100-1514	178
F1000E-999	173
F10PU-CN	172
F10PU-CNMHD	172
F10PU-CNS	172
F12PU-CN	172
F12PU-CNMHD	172

F16PU-CNMHD	172
F200-3827	174
F200-3828	174
F200-3829	174
F200-3830	174
F200-3831	174
F200-3840	174
F200-3841	174
F200-3842	174
F200-3843	174
F200-4101	178
F200-4217	172
F200-4219	172
F200-4226	172
F200-4227	172
F200-4341	172
F200-4342	172
F200-4343	172
F20E-5000	174
F20N-ARM08	179
F20N-ARM14	179
F20N-ARM17	179
F20N-ARM23	179
F20N-STA21	179
F20N-STA33	179
F20P-2500	175
F20P-2502	175
F20P-2504	175
F20P-2506	175
F20P-2508	175
F20P-2510	175
F20P-2512	175
F20P-2514	175
F20P-2516	175
F20P-2518	175
F20P-2520	175
F20P-2522	175
F20P-2524	175
F20P-2526	176
F20P-2528	176
F20P-2530	176
F20P-2534	176
F20P-2540	176
F20P/V-1000	170
F20P/V-1100	170
F20P/V-1200	170
F20P/V-1300	170
F20P/V-2000	169
F20P/V-2000 SST	171
F20P/V-2100	169
F20P/V-2100 SST	171
F20P/V-2200	169
F20P/V-2200 SST	171
F20P/V-2300	169
F20P/V-2300 SST	171
F20PU-5853	176
F20PU-5855	176
F20PU-5903	176
F20PU-5905	176
F20PU-CNMHD	172



F20V-2500	175
F20V-2502	175
F20V-2504	175
F20V-2506	175
F20V-2508	175
F20V-2510	175
F20V-2512	175
F20V-2514	175
F20V-2516	175
F20V-2518	175
F20V-2520	175
F20V-2522	175
F20V-2524	175
F20V-2526	176
F20V-2528	176
F20V-2530	176
F20V-2534	176
F20V-2540	176
F250E-999	173
F250PU-000	173
F250PU-075	172
F250PU-100	172
F250PU-150	172
F250PU-CN	172
F312PU-CN	172
F375E-999	173
F375PU	179
F375PU-000	173
F375PU-125	173
F375PU-150	173
F375PU-200	173
F375PU-250	173
F375PU-300	173
F375PU-BC	179
F375PU-CN	172
F375PU-CNHD	172
F375PU-FN-000	173
F500E-999	173
F500PU	179
F500PU-000	173
F500PU-125	172
F500PU-150	172
F500PU-200	172
F500PU-250	172
F500PU-300	172
F500PU-350	172
F500PU-BC	179
F500PU-CN	172
F500PU-CNHD	172
F500PU-FN-000	173
F50PU-1508	176
F50PU-2008	176
F50PU-2045	176
F50PU-2090	176
F50PU-2538	176
F50PU-2611	176
F50PU-2613	176
F50PU-2616	176
F50PU-2636	176
F50PU-500SP	173
F625E-999	173
F625PU-000	173
F625PU-125	173
F625PU-150	173

F625PU-200	173
F625PU-250	173
F625PU-300	173
F625PU-350	173
F625PU-CNHD	172
F625PU-FN-000	173
F750E-999	173
F750PU-CNHD	172
F750PU-FN-000	173
FAIC-EC	174
FCVHPU-100	178
FCVHPU-150	178
FCVHPU-200	178
FCVHPU-400	178
FCVHPU-600	178
FPCR-050	177
FPCR-075	177
FPCR-100	177
FPCR-125	177
FPCR-150	177
FPCR-200	177
FPCR-250	177
FPCR-300	177
FPCR-400	177
FPCR-600	177
FPCR-800	177
FPS1000	177
FPS1200	177
FPS1400	177
FPS1600	177
FPS1800	177
FPS200	177
FPS250	177
FPS300	177
FPS350	177
FPS400	177
FPS500	177
FPS600	177
FPS800	177
FRGBC	179
FUB-050 thru FUB-600	174
HCSS025100EG	68
HFLW025EG	69
HFMS025062EG	68
HHCS025044EG	68
HHXN025EG	69
HLKW025EG	69
HOCW025	70
HRCN025	69
HRMS025050EG	68
HS025050EG	68
HSQN025EG	69
HTHR025	69
J1205 N thru J 1280 N	111
J1205 thru J1280	111
K1062	70
K1063	70
K1064	70
LS 410-037 thru LS 410-075	100
LS 500-037 thru LS 500-075	100
LS 410	100
M2037	127
M2050	127
M2137	127

M2150	127
M2250	127
M2350	127
M24	138
M2506	138
M2508	138
M2510	138
M2512	138
M2523	138
M2524	138
MU025	105
MU025 thru MU400	105
P1000	24
P1000 DS	24
P1000 EA	187
P1000 H3	24
P1000 HS	24
P1000 KO	24
P1000 SL	24
P1000 SS	185
P1000 T	24
P1000HS SS	185
P1000T SS	185
P1001	24
P1001 3	27
P1001 A	27
P1001 A3	27
P1001 B	27
P1001 B3	27
P1001 C	27
P1001 C3	27
P1001 C41	27
P1001 D3	27
P1001 EA	187
P1001 SS	185
P1001 T	27
P1003	27
P1004 A	28
P1006-0832	67
P1006-1024	67
P1006-1420	67
P1006T1420	67
P1006U-1420 SS	186
P1007	67
P1008	67
P1008T	67
P1008U SS	186
P1009	67
P1010	67
P1010T	67
P1010U SS	186
P1012	67
P1012S	67
P1016	67
P1023	67
P1023S	67
P1024	67
P1024S	67
P1026	76
P1028	76
P1029	78
P1031	76
P1033	77
P1034	77

P1035	78	P1280	55	P1734	80
P1036	75	P1280 A	55	P1736	80
P1037	77	P1280 EA	188	P1737	82
P1038	77	P1280W	126	P1747	77
P1043A	82	P1281	76	P1750	77
P1044	82	P1282	76	P1753	122
P1045	80	P1283	76	P1753 FG	122
P1046A	82	P1290	78	P1753 PO	122
P1047	81	P1291	78	P1754	122
P1048	82	P1315	76	P1754 FG	122
P1049	82	P1320	81	P1754 PO	122
P1050	82	P1325	77	P1769	84
P1062	75	P1326	77	P1771	84
P1063	75	P1334	75	P1773	85
P1064	75	P1346	77	P1775	85
P1065	75	P1347	80	P1777	85
P1066	75	P1354	98	P1787 thru P1795	124
P1067	75	P1354A	98	P1796S	92
P1068	76	P1356	76	P1821	77
P1075	85	P1357	78	P1822	77
P1100	31	P1358	76	P1823	77
P1100 HS	30	P1359	78	P1834	96
P1100 KO	30	P1363A thru P1363E	81	P1834A	96
P1100 SL	30	P1376	81	P1843	98
P1100 SS	185	P1376A	81	P1873	76
P1100 T	30	P1377	81	P1887	84
P1100HS SS	185	P1379S	94	P1924	75
P1100T SS	185	P1380	75	P1925	75
P1101	30	P1380 A	75	P1934	78
P1101 A	30	P1381	78	P1941	75
P1101 B	30	P1382	78	P1944	97
P1101 C	30	P1383	82	P1950	76
P1101 SS	185	P1386	94	P1953	76
P1109	102	P1425 thru P1431	103	P1956	78
P1109 thru P1126	102	P1453	80	P1957	78
P1111	102	P1454	80	P1959	75
P1112	102	P1455	81	P1960	75
P1113	102	P1458	76	P1961	75
P1114	102	P1479A thru P1479E	80	P1962	76
P1115	102	P1498	77	P1964	75
P1117	102	P1499	77	P1973	82
P1118	102	P1538A thru P1538D	77	P1985S	94
P1119	102	P1546	79	P1986S	94
P1120	102	P1546, P2094 thru P2100	79	P2000	34
P1121	102	P1563 thru P1573	103	P2000 HS	33
P1123	102	P1579	78	P2000 KO	33
P1124	102	P1593	85	P2000 SL	33
P1126	102	P1648S thru P1653S	91	P2000 T	33
P1130	79	P1649AS	91	P2001	33
P1131	79	P1650AS	91	P2001 A	33
P1180	55	P1651AS	91	P2001 B	33
P1180W	126	P1654 A	91	P2001 C	33
P1184	54	P1654A thru P1661A	91	P2008 thru P2020	103
P1184 P	54	P1690 thru P1697	123	P2024 thru P2070-84	104
P1184 SS	186	P16F	128	P2072	84
P1186	79	P1703	139	P2072 SQ	84
P1186, P2105 thru P2110	79	P1704	139	P2072A	84
P1201	97	P1713	78	P2072A SQ	84
P1202	97	P1723	76	P2073	84
P1203	97	P1726	76	P2073 SQ	84
P1204 thru P1208	97	P1727	78	P2073A	84
P1211 thru P1217	103	P1728	78	P2073A SQ	84
P1271S	92	P1730	80	P2079	75
P1272S	94	P1732	82	P2094	79



<p>1 5/8" Channel</p> <p>Telestrut System</p> <p>Nuts & Hardware</p> <p>General Fittings</p> <p>Pipe/Conduit Supports</p> <p>Electrical Fittings</p> <p>Concrete Inserts</p> <p>1 1/4" Framing System</p> <p>1 3/16" Framing System</p> <p>Fiberglass System</p> <p>Special Metals</p> <p>PrimeAngle System</p> <p>Product Index</p>	<p>P2095 79</p> <p>P2096 79</p> <p>P2097 79</p> <p>P2098 79</p> <p>P2099 79</p> <p>P2100 79</p> <p>P2101 thru P2104..... 79</p> <p>P2105 79</p> <p>P2106 79</p> <p>P2107 79</p> <p>P2108 79</p> <p>P2109 79</p> <p>P2110 79</p> <p>P21H.....128</p> <p>P2223 83</p> <p>P2224 83</p> <p>P2225 83</p> <p>P2226 83</p> <p>P2227 83</p> <p>P2228 83</p> <p>P2229 83</p> <p>P2230 83</p> <p>P2231 87</p> <p>P2231A..... 87</p> <p>P2232 87</p> <p>P2232A..... 87</p> <p>P2233 87</p> <p>P2233A..... 87</p> <p>P2234 87</p> <p>P2234A..... 87</p> <p>P2235 78</p> <p>P2237 82</p> <p>P2243 113</p> <p>P2245 83</p> <p>P2260 thru P2270..... 79</p> <p>P2280 55</p> <p>P2280 A 55</p> <p>P2280W.....126</p> <p>P2324 75</p> <p>P2325 75</p> <p>P2326 82</p> <p>P2328 82</p> <p>P2329 82</p> <p>P2341 R-L..... 83</p> <p>P2343 R-L..... 83</p> <p>P2344 R-L..... 83</p> <p>P2345 83</p> <p>P2346 83</p> <p>P2347 83</p> <p>P2348 84</p> <p>P2354 R-L..... 97</p> <p>P2355 R-L..... 97</p> <p>P2360 80</p> <p>P2378-1..... 68</p> <p>P2378-2..... 68</p> <p>P2378-3..... 68</p> <p>P2379-1..... 68</p> <p>P2379-2..... 68</p> <p>P2379-3..... 68</p> <p>P2380-1..... 68</p> <p>P2380-2..... 68</p> <p>P2380-3..... 68</p> <p>P2380-4..... 68</p> <p>P2380-5..... 68</p>	<p>P2380-6 68</p> <p>P2381-2 68</p> <p>P2381-3 68</p> <p>P2381-4 68</p> <p>P2381-5 68</p> <p>P2381-6 68</p> <p>P2381-7 68</p> <p>P2382-2 68</p> <p>P2382-3 68</p> <p>P2398S 91</p> <p>P2401S 91</p> <p>P2403S 91</p> <p>P2405S 91</p> <p>P2407 139</p> <p>P2426 thru P2431..... 105</p> <p>P2452 88</p> <p>P2453 84</p> <p>P2454 97</p> <p>P2458-18 thru P2458-36..... 88</p> <p>P2459-36 thru P2459-96..... 88</p> <p>P2469 80</p> <p>P2470-100..... 97</p> <p>P2470-50..... 97</p> <p>P2470-75..... 97</p> <p>P2471 75</p> <p>P2472 R-L..... 83</p> <p>P2473 82</p> <p>P2474 111</p> <p>P2474-1 112</p> <p>P2474-1 thru P2474-4..... 112</p> <p>P2474-2 112</p> <p>P2474-3 112</p> <p>P2474-4 112</p> <p>P2475 112</p> <p>P2476 112</p> <p>P2481 113</p> <p>P2482 113</p> <p>P2484 79</p> <p>P2484W..... 79</p> <p>P2485 70</p> <p>P2486 70</p> <p>P2490 75</p> <p>P2491 R-L thru P2493 R-L..... 85</p> <p>P2494 R-L thru P2499 R-L..... 86</p> <p>P2500 R-L thru P2503 R-L..... 86</p> <p>P2513 thru P2516..... 87</p> <p>P2513A thru P2516A..... 87</p> <p>P2521-100..... 126</p> <p>P2521-50..... 125</p> <p>P2521-75..... 125</p> <p>P2522 124</p> <p>P2534-50..... 123</p> <p>P2534-75..... 123</p> <p>P2535 124</p> <p>P2536 124</p> <p>P2537 125</p> <p>P2539 125</p> <p>P2540 126</p> <p>P2540A..... 126</p> <p>P2541 126</p> <p>P2542 thru P2546..... 86</p> <p>P2547 thru P2551..... 85</p> <p>P2552 127</p> <p>P2557 123</p>	<p>P2381-05 thru P2558-60..... 104</p> <p>P2567 123</p> <p>P2600 106</p> <p>P2602 125</p> <p>P2603 126</p> <p>P2609 thru P2617..... 105</p> <p>P2626 76</p> <p>P2645A thru P2645H..... 123</p> <p>P2647A 123</p> <p>P2647A thru P2647F..... 123</p> <p>P2647B 123</p> <p>P2647C 123</p> <p>P2647D 123</p> <p>P2647E 123</p> <p>P2647F..... 123</p> <p>P2649A thru P2649H..... 122</p> <p>P2655 97</p> <p>P2674 91</p> <p>P2675 89</p> <p>P2676 90</p> <p>P2677 90</p> <p>P2679-4..... 91</p> <p>P2682 90</p> <p>P2749 96</p> <p>P2749N..... 96</p> <p>P2750 96</p> <p>P2750N..... 96</p> <p>P2751 96</p> <p>P2751N..... 96</p> <p>P2755 125</p> <p>P2756 125</p> <p>P2757 125</p> <p>P2784-1..... 89</p> <p>P2785 92</p> <p>P2786 92</p> <p>P2787 92</p> <p>P2800 81</p> <p>P2801 126</p> <p>P2802 126</p> <p>P2803 126</p> <p>P2815 88</p> <p>P2815D..... 88</p> <p>P2820 130</p> <p>P2821 130</p> <p>P2822 130</p> <p>P2823 130</p> <p>P2824-12..... 92</p> <p>P2855 125</p> <p>P2856 125</p> <p>P2857 125</p> <p>P2859 55</p> <p>P2860 55</p> <p>P2862 75</p> <p>P2863 75</p> <p>P2864 75</p> <p>P2867 92</p> <p>P2867A..... 92</p> <p>P2867B..... 92</p> <p>P2868 93</p> <p>P2868A..... 93</p> <p>P2868B..... 93</p> <p>P2893 93</p> <p>P2894 93</p> <p>P2895 93</p>
--	--	---	--

P2896	93	P3253	136	P3703	139
P2897	89	P3254	136	P3704	139
P2898	90	P3255	136	P3712 P	54
P2899	90	P3256	136	P3754	135
P2900	127	P3257	136	P3922 thru P3926	125
P2901	127	P3257A	136	P4000	43
P2902	127	P3258	136	P4000 EA	187
P2903	127	P3259	136	P4000 HS	42
P2904	127	P3260	136	P4000 SL	42
P2920 thru P2924	130	P3261	136	P4000 SS	185
P2928	130	P3262	136	P4000 T	42
P2929	130	P3263	136	P4000HS SS	185
P2930	130	P3264	136	P4000T SS	185
P2932	130	P3265	136	P4001	42
P2940	130	P3266	136	P4001 EA	187
P2941	84	P3267	136	P4003	42
P2942	84	P3268	136	P4004	42
P2944	86	P3269	136	P4006-0832	67
P2945	86	P3270	136	P4006-1024	67
P2946	86	P3280	139	P4006-1420	67
P2947	86	P3280W	126	P4006-1420T SS	186
P2949	96	P3300	40	P4006U-1420 SS	186
P2950	96	P3300 HS	39	P4007	67
P3000	37	P3300 SL	39	P4008	67
P3000 HS	36	P3300 SS	185	P4008U SS	186
P3000 KO	36	P3300 T	39	P4008UT SS	186
P3000 SL	36	P3300HS SS	185	P4009	67
P3000 SS	185	P3300T SS	185	P4010	67
P3000 T	36	P3301	39	P4010T	67
P3000HS SS	185	P3301 SS	185	P4010U SS	186
P3000T SS	185	P3301 T	39	P4010UT SS	186
P3001	36	P3345	80	P4012	67
P3001 T	36	P3349	137	P4012S	67
P3006-0832	67	P3350	137	P4023	67
P3006-1024	67	P3351	137	P4023S	67
P3006-1420	67	P3352	137	P4043	82
P3007	67	P3353	137	P4045	80
P3008	67	P3354	137	P4047	81
P3009	67	P3355	137	P4100	46
P3010	67	P3356	137	P4100 HS	45
P3013	67	P3357	137	P4100 SL	45
P3016-0632	67	P3357A	137	P4100 T	45
P3016-0832	67	P3358	137	P4101	45
P3016-1024	67	P3359	137	P4101 T	45
P3016-1420	67	P3360	137	P4280	55
P3045	80	P3361	137	P4280 EA	188
P3047	81	P3362	137	P4280W	126
P3087	94	P3363	137	P4376	81
P3088	94	P3364	137	P4376A	81
P3116-125	127	P3365	137	P4377	81
P3165	138	P3366	137	P4663	139
P3170	138	P3367	137	P4703	139
P3184	54	P3368	137	P4908	67
P3184 EA	188	P3369	137	P5000	49
P3184 F	54	P3370	137	P5000 HS	48
P3184 P	54	P3380	139	P5000 KO	48
P3200	136	P3409 thru P3417	105	P5000 SL	48
P3245	138	P3521-50	125	P5000 T	48
P3245-N4	138	P3539	125	P5001	48
P3245-N6	138	P3663	139	P5021-100	126
P3249	136	P3700	139	P5077	81
P3250	136	P3700-37	139	P5280	55
P3251	136	P3700-50	139	P5280W	126
P3252	136	P3700-62	139	P5500	52



P5500 EA	187
P5500 HS	51
P5500 KO	51
P5500 SL	51
P5500 T	51
P5501	51
P5501 T	51
P5506-0832	67
P5506-1024	67
P5506-1420	67
P5506U-1420 SS	186
P5507	67
P5508	67
P5508U SS	186
P5509	67
P5510	67
P5510U SS	186
P5521-100	126
P5537	125
P5539	125
P5543	82
P5545	80
P5547	81
P5560	80
P5577	81
P5580	55
P5580 EA	126
P5580W	126
P6000	157
P6000 EA	188
P6000 SS	185
P6001	157
P6001 EA	188
P6001A	158
P6001B	158
P6001C	158
P6006-0832 thru P6006-1420	161
P6026	162
P6028	162
P6031	162
P6033	162
P6036	162
P6037	163
P6038	163
P6044	165
P6045	164
P6047	164
P6048	164
P6062	161
P6065	161
P6066	161
P6067	161
P6068	162
P6069	162
P6127 thru P6129	165
P6130	163
P6184 P	161
P6186	164
P6280	161
P6281	162
P6282	162
P6283	162
P6290	163
P6291	163

P6325	162
P6326	162
P6331	163
P6332	164
P6334	162
P6346	162
P6347	164
P6349	165
P6353	165
P6356A	161
P6357	163
P6358A	161
P6359	163
P6376	165
P6376A	165
P6377	165
P6379 S	166
P6380	162
P6380A	162
P6381	163
P6382	163
P6386	166
P6453	164
P6454	164
P6455	165
P6458	162
P6546	164
P6579	163
P6726A	162
P6728	163
P6737	164
P6758	164
P6805 thru P6810	166
P6887	163
P6917	163
P6918	163
P6924	161
P6925	161
P6962	161
P6973	165
P7000	159
P7000 EA	188
P7000 SS	185
P7001	159
P7001 EA	188
P7006-0832 thru P7006-1420	161
P7008 thru P7020	166
P7045	164
P7047	164
P7048	165
P7097	164
P7098	164
P7100	164
P7101	164
P7108	164
P7109	164
P7110	164
P7235	163
P7280	161
P7324	161
P7325	161
P7347	164
P7376	165
P7376A	165

P7377	165
P7758	164
P9000	59
P9010	62
P9011	62
P9012	62
P9013	63
P9014	63
P9200	59
P9207	62
P9209	62
P9324	62
PA 158	190
PA 1GP	191
PA 1HDC	191
PA 1RC	191
PA 1RP	191
PA 1SC	191
PA 1SNB	191
PA 238	190
PA 318	190
PFL037 thru PFL050T	95
PFL2-37	89
PLF3037 thru PLF3075	95
PLF9037 thru PLF9100	95
PLLC025	94
PUX11810	110
PUX11834	110
PUX1234	110
PUX13810	110
PUX13834	110
PUX15810	110
PUX15834	110
PUX21810	110
PUX21834	110
PUX23810	110
PUX23834	110
PUX25810	110
PUX25834	110
PUX31810	110
PUX31834	110
PUX3410	110
PUX3434	110
PUX35810	110
PUX35834	110
PUX3834 thru PUX41810	110
PUX41834	110
PUX5810	110
PUX5834	110
PUX7810	110
PUX7834	110
Slot Adapter™	70
SPF 100-037 thru SPF 100-075	98
SPF 200-037 thru SPF 200-075	98
SPF 300-037 thru SPF 300-075	99
SPF 400-037 thru SPF 400-075	99
UB1/2PA	109
UP-BK thru UP-MPDS	113
UP-SPSS	113

(1 ⁵ / ₈ " x 1 ⁵ / ₈ " x 14 ga.) Light Duty.....	190	Channel Nut With Spring..	67, 150, 161, 186	End Cap for P7000.....	161
(1 ⁵ / ₈ " x 2 ³ / ₈ " x 14 ga.) Medium Duty	190	Channel Nut Without Spring	67, 150, 186	End Caps and Frame Caps	55
(1 ⁵ / ₈ " x 3 ¹ / ₈ " x 12 ga.) Heavy Duty.....	190	Channel Nuts, Caps & Closures	161	End Connector For 1" Conduit	126
"U" & Wing Shape Fittings.....	82	Channel Pictorial Index	22	End Connectors For 1/2" & 3/4" Conduit	125
"U" Shape & Special App. Fittings	165	Channel Selection Chart.....	23	End Connectors For 1/2"Conduit.....	125
"U" Shape Fittings.....	81	Channel Selection for Sch. 10 Sprinkler Pipe Trapeze Hangers.....	116	Extruded Aluminum Channels.....	187-188
"Z" Shape Fittings	80	Channel Selection for Sch. 40 Sprinkler Pipe Trapeze Hangers.....	117	Fabricated Clevis Hangers.....	178
1/4" Framing System Pictorial Index	142	Channel Spacers	173	Fiberglass Beam Clamps, Power-Rack Stanchions	179
1/4" x 1 1/2".....	145	Channel Stud Nut With Spring	68	Fiberglass Channel Nuts & Accessories.....	172
1/4" x 1 1/4".....	143	Channel Trolley Support.....	96	Fiberglass Clamps Design Load Info.....	180
1/4" x 2 1/2".....	144, 149	Channel/Tube Connectors	130	Fiberglass Clevis Hangers	178
1/4" x 3/4".....	145	Channels & Combinations in Descending Order of Strength.....	23	Fiberglass Hardware	173-174
1/4" x 5/8".....	147	Chemical Compatibility Table	180-181	Fiberglass Pictorial Index.....	168
13/16" Framing System Pictorial Index.....	156	Closure Strip.....	151, 161, 186, 188	Fiberglass Sample Specifications.....	182
1 5/8" x 1 5/8" Channel.....	136	Closure Strips for 1 5/8" (41mm) Channel ..	54	Fiberglass Technical Data.....	180-181
1 5/8" x 1 5/8" Channel.....	135	Column Insert	94	Fixture Stud Nut.....	127
1 5/8" x 7/8" Channel.....	138	Column Loading.....	28	Fixture Wiring Nipple	126
37 1/2° (.21ϖ) Stair Tread Support.....	97	Concrete Inserts Pictorial Index & Installation.....	134	Flange Clamp	94-95
4" (101.6) Bus Bar Maple Clamps	123	Concrete Inserts Technical Data	140	Flat and 90° Fittings	162
45° (.25ϖ) Stair Tread Support.....	97	Conduit Hanger Connection For 1/2" Conduit	124	Flat Fiberglass Fittings	175
90° Rack Fitting	130	Conduit Hanger Connection For 3/4" Conduit	124	Flat Head Machine Screws	68
A1000 & A1001 Channels.....	143, 144	Conduit Supports.....	119	Flat Plate & 90° Angle Fittings.....	76
A3300 & A3301 Channels.....	145-146	Conduit Swing Fitting.....	123	Flat Plate Fittings.....	75
A4000 & A4001 Channels.....	147-148	Cone Point Set Screws.....	68	Flat Washers	69,173
A5000 Channels.....	149	Concrete Insert Load Chart	140	Fluorescent Fixture Hangers.....	125
Acetal Slide	165	Copper Tube (Type K).....	118	Fluorescent Fixtures - Support Applications	132
Adjustable Hinge Connection	98	Copper Tube (Type L).....	118	Frame Caps.....	55
Adjustable Brace Fitting	88	CUSH-A-CLAMP® Assembly	107	General Fittings Pictorial Index	72-73
Adjustable Pipe Clamps	177	CUSH-A-CLAMP Assembly Omega	108	Gravity Pin	62
Adjustable Seismic Pivot Fittings	98	CUSH-A-CLAMP Assembly U-Bolt.....	109	Gusset Plate.....	191
A-Konnector Rod Couplers	174	CUSH-A-GRIP®.....	110	Hardware	68-70
Alternate Three-Piece Assembly.....	63	CUSH-A-THERM™.....	110	Heavy Duty Back-to-Back Channel SST Profile.....	171
Angle and Wing Shape Fittings	163	Cutting Alignment Gauge	62	Heavy Duty Channel - Patented Flange Profile	169
Angle, "Z" & "U" Shape Fittings	164	Cutting Chart.....	64	Heavy Duty Channel Standard Profile.....	171
Angle, Wing and "U" Shape Fittings.....	153	Data for Schedule Steel Pipe.....	120	Heavy Duty Channel Nuts.....	172
Beam Clamps.....	89-95	Deck Insert.....	139	Heavy Duty Single Channel Patented Flange Profile	169
Beam Clamps and Tubing Clips.....	166	Deck Inserts.....	139	Heavy Duty Single Channel SST Profile.....	171
Beam Configurations With Stiffeners	192	Design Load Data.....	74	Hex Bolts.....	173
Beam Load Calculations.....	192	Double Pipe Axle Support	97	Hex Flange Bolts	172
Beam Loads	193	Duplex Grounded Receptacle	123	Hex Flange Nuts	173
Brace Fittings	85-88	Electrical Accessories & Junction Boxes	126	Hex Head Cap Screws	68
Brackets.....	85, 165	Electrical Fittings.....	123, 124	Hex Nuts	173
Cable Brackets	130	Electrical Fittings Pictorial Index	122	Hex Slotted Machine Screws.....	68
Cable Entrance Fittings.....	130	Electrical Metallic Tubing (EMT) - Thin Wall	118	Hexagon Nuts	69
Cable Entrance Tubing.....	128-129	Electrical Technical Data.....	131-132	High-Bay Fixture Raceway Applications .	132
Cable Saddles	122	End Caps.....	139, 151	Hold-Down Springs.....	75
Cable Tray Bracket.....	85	End Cap Anchors	139	Hub Assembly.....	126
Channel Capping Strip	174	End Cap for P6000.....	161	Installation and Heavy Duty Inserts.....	135
Channel End Cap.....	174				
Channel End Caps, Closure Strips, Flat & 90° Fittings	151				
Channel Fittings	175				
Channel Nut Connection.....	63				
Channel Nut Maximum Allowable Pull-out & Slip Loads.....	66				

Product Index
PrimeAngle System
Special Metals
Fiberglass System
1 3/16" Framing System
1 1/4" Framing System
Concrete Inserts
Electrical Fittings
Pipe/Conduit Supports
General Fittings
Nuts & Hardware
Telestrut System
1 5/8" Channel

Installing Concrete Inserts 134
 Intermediate Metallic Conduit (IMC) 118
 J Conduit & Pipe Hanger 111
 Joint Covers 139
 Junction Box 126
 Junction Box Cover 126
 Knee Brace 88
 Kwik Washer™ 70
 Ladder Rung 97
 Lateral Bracing Load Reduction
 & Bearing Loads 56
 Light Duty 137
 Light Duty Channel
 Patented Flange Profile 170
 Light Duty Single Channel
 Patented Flange Profile 170
 Load Chart by Length 140
 Load Of Threaded Hot Rolled Steel 69
 Lock Washers 69
 Locking Clip 130
 Maple Cable Clamps 123
 Maple Cable Saddles 122
 Maximum Allowable Point Load 140
 Maximum Allowable Pull-Out
 & Slip Loads 150
 Maximum Allowable Pull-Out
 & Slip Loads 160
 Maximum Allowable Uniform Load 140
 Mercury Vapor Fixture Hanger 125
 Molded Beam Clamp Assembly 179
 Molded Beam Clamps 179
 Molded Clevis Hangers 178
 Multi-grip Rivet 62
 Mustang Universal One-Piece Pipe,
 Conduit (GRC, EMT & IMC) and
 Tubing Clamps 105
 Ninety Degree and "Z" Shape Fittings 152
 Ninety Degree Angle & Angular Fittings ... 79
 Ninety Degree Angle Fittings 77-78
 Nonmetallic U-Bolts 174
 Nut Selection and Load Data 150
 Nuts & Hardware Pictorial Index
 & Channel Nut Loads 66
 One Hole Clamp for O.D. Tubing 103
 Outlet Box 123
 Outlet Box Connection 124
 P1000 Channel Combinations 27-29
 P1000® & P1001 Channels 24-26
 P1100 & P1101 Channels 30-32
 P2000 & P2001 Channels 33-35
 P3000 & P3001 Channels 36-38
 P3300 & P3301 Channels 39-41
 P4000 & P4001 Channels 42-44
 P4100 & P4101 Channels 45-47
 P5000 & P5001 Channels 48-50
 P5500 & P5501 Channels 51-53

P5580 End Caps 126
 P6000 & P6001 Channel 157-158
 P7000 & P7001 Channel 159-160
 P9000 & P9200 Telestrut Channels 60-61
 Parallel Clamps for Rigid
 Conduit & Pipe 103
 Pipe & Conduit Clamps 103-105
 Pipe & Conduit Pictorial Index 102
 Pipe & Conduit Reference Data 114-120
 Pipe & Tubing Clamps 107-110
 Pipe Block 113
 Pipe Brackets 113
 Pipe Clamps 177
 Pipe Clamps for O.D. Tubing 104
 Pipe Clamps for Rigid Steel Conduit 102
 Pipe Clamps for Thin Wall
 Conduit (E.M.T.) 103
 Pipe Clips and Brackets 154
 Pipe Coupling Fitting 97
 Pipe Hangers 111
 Pipe Roller for 1/2" - 4" Pipe 111
 Pipe Roller for 1" - 24" Pipe 112
 Pipe Rollers 112
 Pipe Spacing Table 115
 Pipe Support Bracket 113
 Plastic White End Caps 55
 Polypropylene Wire Retainer 127
 Porce-A-Clamp™ 124
 Portable Cutter 191
 Post Bases & Telestrut Connection
 Methods, 63
 Power-Rack Stanchions 179
 Preferred Three-Piece Assembly 63
 Prime Angle and Accessories 190-191
 Prime Angle Beam Loads 192-193
 Prime Angle Column Loads 194
 Pull-Out Load 140
 Raceway Hangers 125
 Receptacles & Fixture Hangers 125
 Recommended Support
 Spacing for Fixtures 132
 Reel Rack Supports for 1 1/4" & 2" Pipe 97
 Retainer Strap 91
 Rigid Caster 191
 Rigid Pipe Clamps 177
 Rigid Steel (Heavy Duty) Conduit 119
 Round Head Machine Screws 68
 Saddle Clips 172
 Schedule 40: PVC Plastic Pipe 119
 Section Properties 169-170
 Seismic Pivot Fittings 98-100
 Seismic Retrofit Fittings 99-100
 Seismic Rod Stiffener 70
 Serrated Nuts and Bolts 191
 Single Piece Pipe Strap 104

Slot Adapter™ 70
 Slotted Channel 169-171
 Slotted Strap 191
 Spacer Clevis 126
 Spacing Chart 70
 Spacing of Multiple Point Loads 140
 Special Application Fittings 97
 Special Application Fittings
 & Seismic Retrofit Fittings 98
 Special Metals Pictorial Index 184
 Specialized Fittings & Post Bases 62
 Splice Fittings 125,130
 Spot Insert 138
 Spot Insert Load Chart 140
 Square Nuts 69
 Stainless Steel Channel 185
 Stainless Steel Channel Nuts
 & Closure Strips 186
 Standard Duty and Accessories 136, 138
 Standard Duty Channel Nuts 172
 Stand-off Pipe Clamps 105
 Steel Coupler Nuts 69
 Steel Threaded Rod 69
 Stop-Lock Assemblies 172
 Swiftgrip 89
 Swivel Caster 191
 Swivel Hangers &
 In-Channel Joiners 127
 Swivel Nut 91
 Telestrut Pictorial Index 58-59
 Threaded Rod 174
 Through-Bolt Connection 63
 Transverse Stiffeners 191
 Trolley Assemblies 96
 Tubing Clips 166
 Tubular Back Braces 88
 Tubular Knee Braces 88
 Two Hole Pipe Straps 177
 Two-Piece Assembly 63
 UNI-CLIP® & Support 105, 154
 UNICUSHION® 106
 UNICUSHION® Clamp Cutting Guide 106
 UNICUSHION® Clamp Selection Guide... 106
 UniPier™ 113
 Unisert Channel Insert 178
 Universal Beam Clamp 90
 Universal Clamps for Rigid or
 Thin wall Conduit 103
 Using Installed Concrete Insert 135
 Wall Ladder Bracket 97
 Wide Throat Beam Clamp 90
 Wing Shape Fittings 83
 Wing Shape Fittings, Post Bases
 & Brackets 84
 Wiring Stud Nut 126

UNISTRUT®

Application Showcase



The UNISTRUT® Metal Framing System

...engineered solutions you can count on!

Products of UNISTRUT are manufactured under one or more of the following United States patents:

3,362,738	3,388,809	3,415,554
3,417,951	3,421,280	3,437,779
3,443,348	3,468,567	3,601,347
3,617,076	3,618,882	3,628,296
3,721,463	3,861,107	3,877,275
3,888,440	3,888,441	3,914,063
3,927,499	3,928,930	3,948,012
3,968,624	3,994,111	4,073,114
4,277,923	4,278,288	4,289,415

Foreign patents and other patents pending

THE PRODUCT APPLICATION SHOWCASE

Allows you to build a strong reputation with a World of Support from Unistrut. It's packed with examples and application photos of the Unistrut Framing System in action. Call for your copy today.


Registered Trademarks of UNISTRUT:

“AXENT”, “UNISTRUT”, “P1000”, “TELESPAR”, “TELESTRUT”, “UNI-CLIP”, “UNICUSHION”, “UNIROD”, “GRAB BAG”, “PRIME ANGLE”, “UniPier”, and the cartoon character “Mr. Strut”.

“SPF” is a Registered Trademark of Lord & Sons.

“Cush-A-Clamp”, “Cush-A-Grip”, & “Cush-A-Therm” is a Registered Trademark of ZSi.

Marketing throughout the world by Unistrut:
Tel: (800) 521-7730 • www.unistrut.com

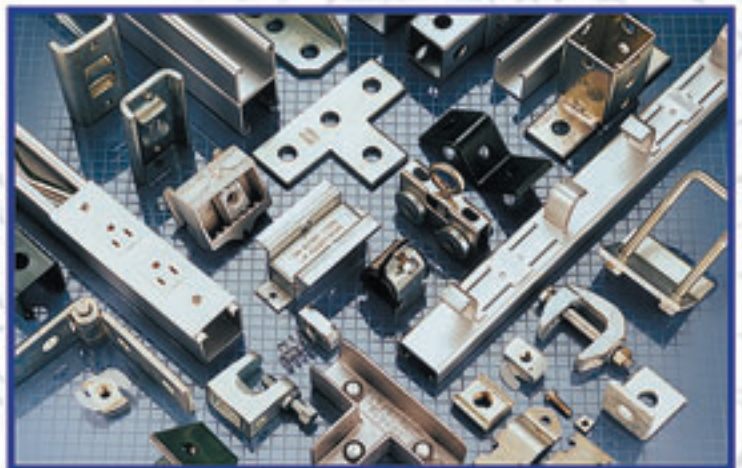

**When there's work to be done,
build with the leader...**

UNISTRUT®

UNISTRUT

4205 Elizabeth
Wayne, MI 48184
Phone: 800-521-7730
Fax: 734-721-4106

www.unistrut.com

UNISTRUT CANADA

585 Finley Avenue
Ajax, Ontario, L1S-2E4 Canada
Tel: (800) 267-4959 (Canada only)
Tel: (905) 683-8131
Fax: (905) 683-8987