


INTRODUCING...

THE SOLUTION FOR MOUNTING STRUT TO A SLOPED CEILING

NEW

UNISTRUT® HINGED BEAM CLAMP P2788

Patent pending

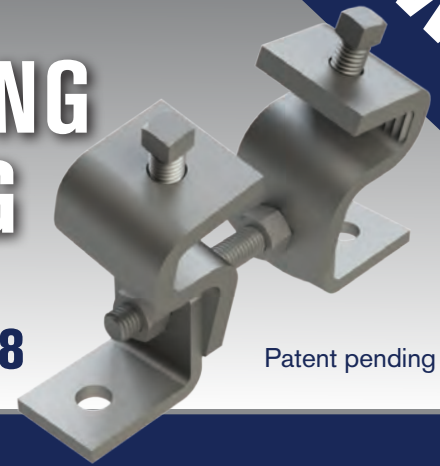


UNISTRUT®

A PART OF **atkore**
INTERNATIONAL

Unistrut® is proud to introduce our new Hinged Beam Clamp, the solution for mounting a strut system to a sloped ceiling. The Hinged Beam Clamp is designed to pivot up to 18° so the strut installation can remain level even when the ceiling is not.

In the past, contractors have used various methods such as bending or modifying products which are not recommended attachment methods. The Hinged Beam Clamp provides a safe and easy solution for mounting strut to a sloped ceiling. Order today!

For more information, visit Unistrut.us or contact your local sales rep.

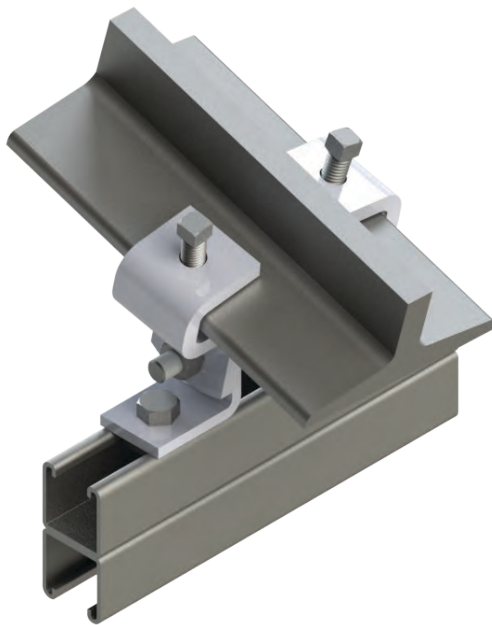

I-beam, Channel, Hex Head Cap Screws and Channel Nut not included

FEATURES AND BENEFITS

- Safe solution for mounting strut to a sloped ceiling
- Eliminates the need to modify products to accommodate sloped ceilings
- Beam Flange width ranging from 4"-12"
- Compatible with any 1 5/8" strut profile
- Serrated inside face to prevent slippage
- Beam Flange thickness up to 7/8"
- Slopes up to 18°

Part Number	Beam Flange Width	Beam Loads
P2788-06	4" - 6"	1500 lbs.
P2788-08	6 1/8" - 8"	1500 lbs.
P2788-10	8 1/8" - 10"	1500 lbs.
P2788-12	10 1/8" - 12"	1500 lbs.

UNISTRUT®. Build something great.